


T/D 010

GAS FIRED STORAGE WATER HEATERS

Typical Installation Standard Range and Storage Tank (Vented System)

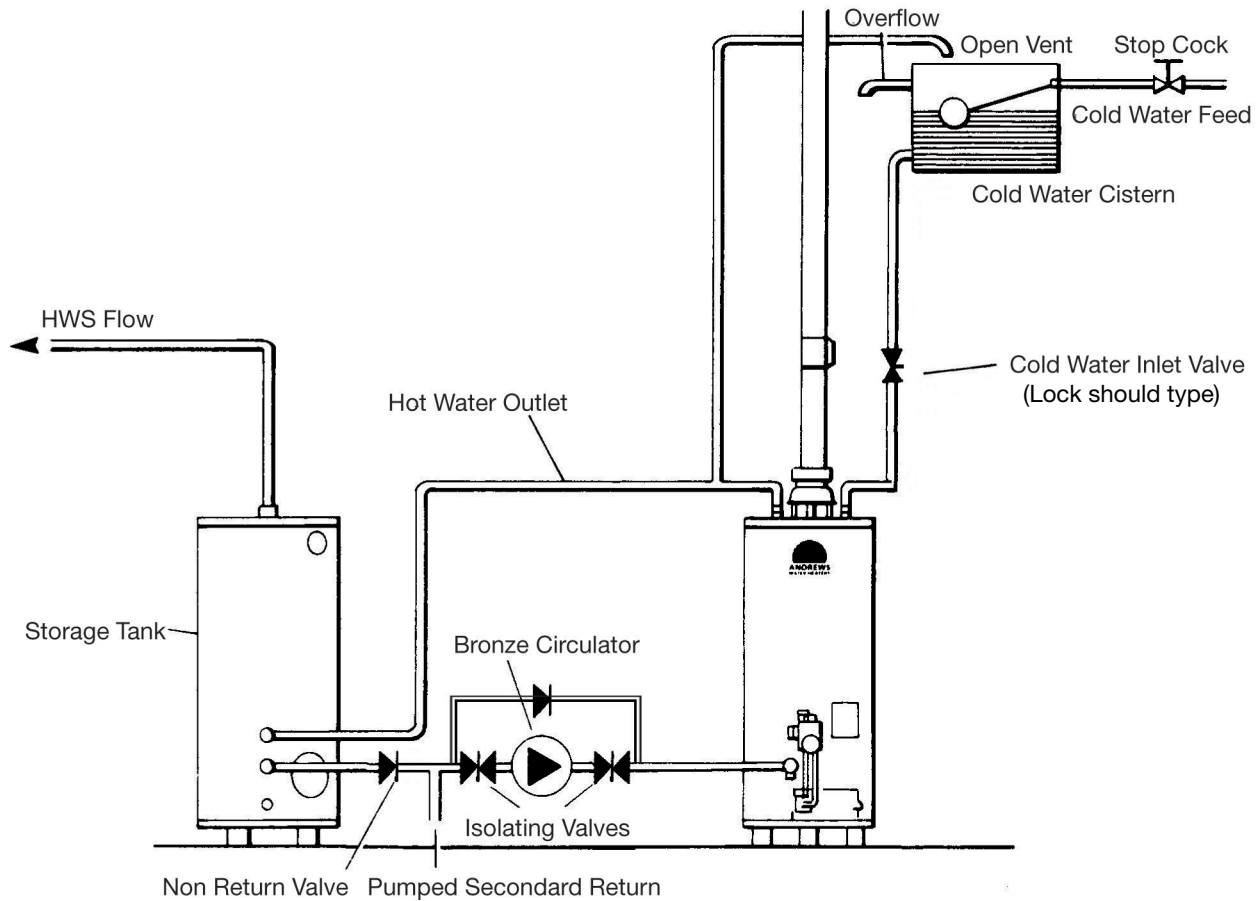


- The Andrews Storage Tank is available in three capacities, 66 Gals (300 Litres), 100 Gals (455 Litres), 166 Gals (755 Litres). These are models ST66, ST100, ST166.
- When installed with an Andrews Storage Water Heater, the hot water storage capacity is increased in order to satisfy your system requirements.
- System temperature control can be achieved by the installation of a bronze circulator wired for permanent operation.
- A system pumped secondary return is recommended.

GAS FIRED STORAGE WATER HEATERS

Typical Installation Standard Range and Storage Tank (Unvented System)

N.B. – The 25 Litre expansion vessel is suitable for a stored-volume (Heater, Tank and pipework) of 400 Litres. If this is exceeded a larger or additional expansion vessel is required. (Shown dotted).

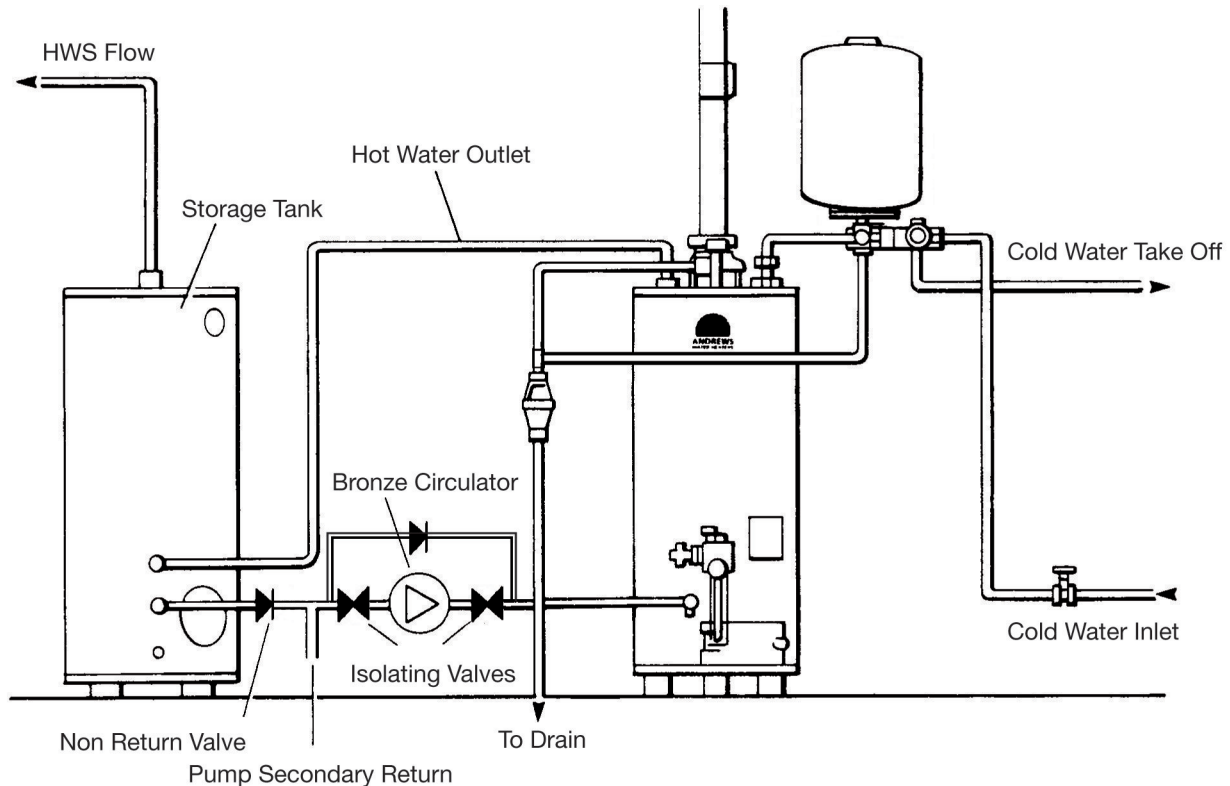

- The Andrews Storage Tank is available in three capacities, 66 Gals (300 Litres), 100 Gals (455 Litres), 166 Gals (755 Litres). These are models ST66, ST100, ST166.
- When installed with an Andrews Storage Water Heater, the hot water storage capacity is increased in order to satisfy your system requirements.
- System temperature control can be achieved by the installation of a bronze circulator wired for permanent operation.
- A system pumped secondary return is recommended.

Since it is our policy to strive for progressive design and performance all our equipment is subject to alteration without notice.



Andrews Water Heaters
Wood Lane, Erdington
Birmingham B24 9QP
Telephone: 0845 070 1058 Fax: 0845 070 1059
E-mail: andrews@andrews-waterheaters.co.uk