


CP Cabinet Heaters



powrmatic

- Oil, Natural Gas & LPG
- Vertical, horizontal & external
- Time & temperature controlled
- ECA models for lower fuel consumption and carbon emissions
- Summer air movement
- 2 year parts & one year labour guarantee
- 10 year heat exchanger warranty



Authorised User No. 00175

CP Cabinet Heaters

Duties

Model		100	150 Oil	150 Gas	200	300	400	500	600	700	800	1000	1250	1500	2000		
Output	Standard Models	kW	29	44	44	59	88	117	147	176	205	235	293	366	440	586	
	ECA Models	kW	26	36	36	48	71	96	119	141	154	196	245	311	396	n/a	
Electrics	Supply	Standard	v/ph/hz					230/1/50									
		Optional	v/ph/hz					230/1/50					n/a				
Overall Dimensions	Height	mm	1948	1948	2306	2306	2746	3123	3123	3239	3326	3326	3326	3326	3663	3891	
	Width	mm	600	600	626	626	728	904	904	904	904	1158	1158	1158	1391	1695	
	Depth	mm	728	728	804	804	855	1058	1058	1362	1362	1362	1362	1667	2432	2737	
Flue Diameter		mm ø	125	125	125	125	150	150	175	175	175	200	200	200	300	300	
Nett Weight		kg	126	137	163	163	204	330	355	435	530	550	556	670	1397	1930	

Notes -

Heaters have efficiency levels which meet with the minimum efficiency requirements of UK Part L2B Building Regulations

ECA heaters have efficiency levels which meet the criteria of the Enhanced Capital Allowance Scheme

Dimensions and weights in table above refer to upright heaters freeblowing only - for horizontal and counterflow heater dimensions please contact our sales office

CP500 ECA has a 150mm diameter flue

Introduction

Warm air heating provides an efficient, flexible and cost effective solution for the heating of most industrial and commercial buildings.

Powrmatic have been a leading manufacturer of warm air heating products for more than sixty years. Integrity of design and quality of manufacture are characteristics inherent in each and every product.

Peace of mind is assured with Powrmatic's comprehensive guarantee package which includes a two year parts and one year labour guarantee as well as a TEN year combustion chamber/heat exchanger warranty.

CP Cabinet Heaters can be upright floor mounted, horizontally suspended or even arranged in counterflow configuration. Models suitable for internal and external locations are available and all can be specified for either natural gas, lpg or oil firing. All heaters are finished with a durable epoxy powder coat paint which is stove hardened.

Combustion Chamber/Heat Exchanger assembly designed to combine thermal efficiency with long-lasting service life. Life cycle tested and warranted for ten years.

Fuel Efficiency and Low Carbon Emissions underpin the heater design with all models meeting current Part L2B Building Regulations with further models available which meet the exacting criteria of the Government's Enhanced Capital Allowance scheme.


Time and Temperature Controls are supplied with each heater to provide automatic operation. In most cases the controls are fitted and pre-wired to the heater. Control options include the easy to set Powrtrol or the code protected optimised start MC200. Both control systems include, as standard, day thermostat, frost protection thermostat, programmable time switch and fan only switching to facilitate summer air movement.



Hort Bridge
Ilminster
Somerset
TA19 9PS
United Kingdom

Tel: +44 (0)1460 53535
Fax: +44 (0)1460 52341
Email info@powrmatic.co.uk
www.powrmatic.co.uk

Efficiency

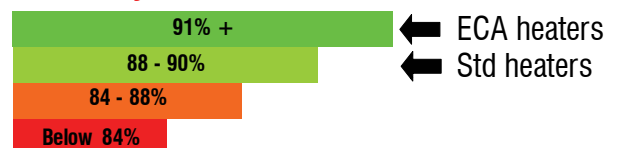

Powrmatic pursues a policy of continuous improvement in both design and performance of its products and therefore reserves the right to change, amend or vary specifications without notice. Whilst the details contained herein are believed to be correct they do not form the basis of any contract and interested parties should contact the Company to confirm whether any material alterations have been made since publication of this brochure.

