


OUH Oil Unit Heaters



powrmatic

- 35sec oil or 28 sec kerosene fired
- space saving 'off-floor' mounting
- axial freeblowing & centrifugal fan options
- time & temperature compatible control stations
- ECA compliant for lower fuel consumption and carbon emissions
- summer air movement
- 2 year parts & one year labour guarantee
- 10 year heat exchanger time related warranty



Authorised User No. 00175

OUH Oil Unit Heaters

Duties

Model			20	30	45	60
Output		kW	20	30	45	60
Electrics	Supply	Standard	V/Ph/Hz 230/1/50			
		Optional	V/Ph/Hz 415/3/50			
Overall Dimensions	Height	mm	820	1102	1102	1102
	Width	mm	555	780	780	780
	Depth	mm	745	1030	1030	1030
Flue Diameter		mm ø	100 125 125			
Nett Weight		kg	62	126	126	126

Introduction

Warm air heating provides an efficient, flexible and cost effective solution for the heating of most industrial and commercial buildings.

Powrmatic have been a leading manufacturer of warm air heating products for more than sixty years. Integrity of design and quality of manufacture are characteristics inherent in each and every product.

Peace of mind is assured with Powrmatic's comprehensive guarantee package which includes a two year parts and one year labour guarantee as well as a TEN year heat exchanger warranty.

OUH Oil Unit Heaters are designed for suspended off the floor space saving locations and benefit from clean lines. Models suitable for 35sec oil or 28sec kerosene firing. All heaters are finished with a durable epoxy powder coat paint which is stove hardened.

Heat Exchanger assembly designed to combine thermal efficiency with long-lasting service life. Life cycle tested and warranted for ten years.


Fuel Efficiency and Low Carbon Emissions underpin the heater design with all models meeting current Part L2B Building Regulations with all models meeting the exacting criteria of the Government's Enhanced Capital Allowance scheme.

Time and Temperature Controls Stations fully compatible with OUH heaters can be optionally supplied to provide automatic operation. Control stations are supplied loose for convenient low level mounting with customers selecting either the easy to set Powrtrol or the code protected optimised start MC200. Both control systems include, as standard, day thermostat, frost protection thermostat, programmable time switch and fan only switching to facilitate summer air move-



**Hort Bridge
Ilminster
Somerset
TA19 9PS
United Kingdom
Tel: +44 (0)1460 53535
Fax: +44 (0)1460 52341
Email info@powrmatic.co.uk
www.powrmatic.co.uk**

Efficiency

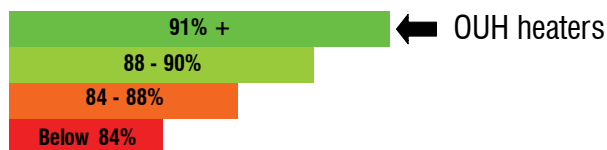

Powrmatic pursues a policy of continuous improvement in both design and performance of its products and therefore reserves the right to change, amend or vary specifications without notice. Whilst the details contained herein are believed to be correct they do not form the basis of any contract and interested parties should contact the Company to confirm whether any material alterations have been made since publication of this brochure.

