



Wood burning open front convector



Multi fuel stove



Open fronted gas fire



Wood burning insert



SCHIEDEL CHIMNEY SOLUTIONS TO PART F

- Choosing the right secondary heating appliance ■
- Specifying the appropriate chimney ■
- Gaining Carbon Credits ■
- Adding to Sales appeal ■

Washingbay Road
Coalisland, Co. Tyrone
BT71 4ND
Tel: 028 8774 0436
Fax: 028 8774 7430
office@schiedel.co.uk
www.schiedel.co.uk

Crowther Estate
Washington
Tyne & Wear NE38 0AQ
Tel. +44 (0)191 416 1150
Fax. +44 (0)191 415 1263
sales@rite-vent.co.uk
www.rite-vent.co.uk

What does Part F mean for you?


The introduction of Part F means that all new build developments must comply with stringent new rules, aimed at reducing carbon emissions from houses by 20%. By choosing an appropriate secondary heating appliance and an efficient chimney/flue system, you can help meet the Government's target without compromising on the cosy focal point that truly makes a house a home.



Lower your carbon count

Part F assumes two types of heating – primary central heating and secondary heating from room heaters. The SAP calculation used to determine the carbon emissions assumes the secondary heating to be electric.

Electricity is a more carbon intensive energy source than wood, dual fuel (a mix of wood and solid fuel), gas or oil. This assumption gives you the opportunity to make a carbon saving by substituting electric with another fuel and an efficient appliance, open or glass fronted. By using a carbon efficient secondary heat source you can gain carbon credits to offset against other aspects of construction like insulation or glazing.

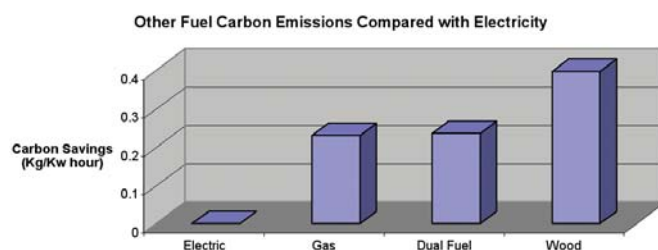

Chimney specification

The carbon saving can be increased further by using a chimney that has a diameter of less than 200mm or building

in a damper, as this halves the assumed air flow in the chimney. Most modern appliances can work efficiently with a properly insulated chimney of less than 200mm. It is important to note that there is no benefit in using a flueless appliance, as the air flow will be assumed to be the same as a 200mm chimney.

Choosing your appliance at the planning stage is now crucial

Both primary and secondary heating MUST be specified at the design stage if the required carbon savings are to be realised. This is a big change in our thinking as the choice of appliance would usually have been left until building was complete or the house occupied. If the choice is not made before the build, the SAP programme will default to the worst case scenario.

No two house designs will have the same carbon output. The shape and size of the house and the choice of construction components will determine the carbon usage, as will the efficiency of the primary and secondary heating. We have based our figures on a 100sqm detached house with a primary heating boiler efficiency of 90%.

Benefits for builder & designer

Research shows that the fireplace is one of the features that sells a property. You can continue to give home owners what they want and gain carbon credits that you can offset against other aspects of construction.

Benefits for the environment

Everyone wants a cleaner, greener environment. With the introduction of Part F (Document L in GB and Ireland) we can reduce the amount of emissions into the atmosphere - and it won't cost the earth.


Benefits for the homeowner

With a growing range of modern carbon efficient appliances to choose from and the correct chimney/ flue specification, you can still have the focal point and atmosphere created by a fire.


The Schiedel Swift Chimney System

Efficient appliances require efficient chimneys, and an efficient chimney is one that keeps the flue gases warm, allowing them to freely escape to the atmosphere. Schiedel can offer you a range of efficient chimney systems, that in addition to being quick and simple to install will create a consistently insulated chimney. **The concept involves a modular 3-layer insulated chimney system:**

- **1st Layer** a high quality flue liner, made of fireclay, tested to EN1457.
- **2nd Layer** a flexible insulation board designed to maintain the temperature of the flue gases and allow them to pass freely up the chimney. It also allows the flue liner to expand and contract without damage.
- **3rd Layer** a lightweight chimney block which safely encases the whole system and provides additional insulation.

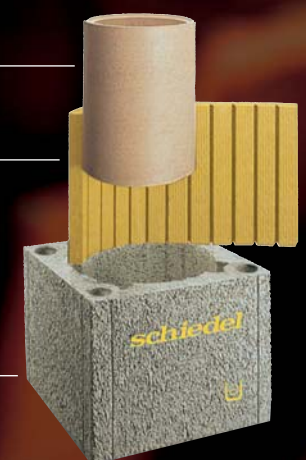

The convenience of gas

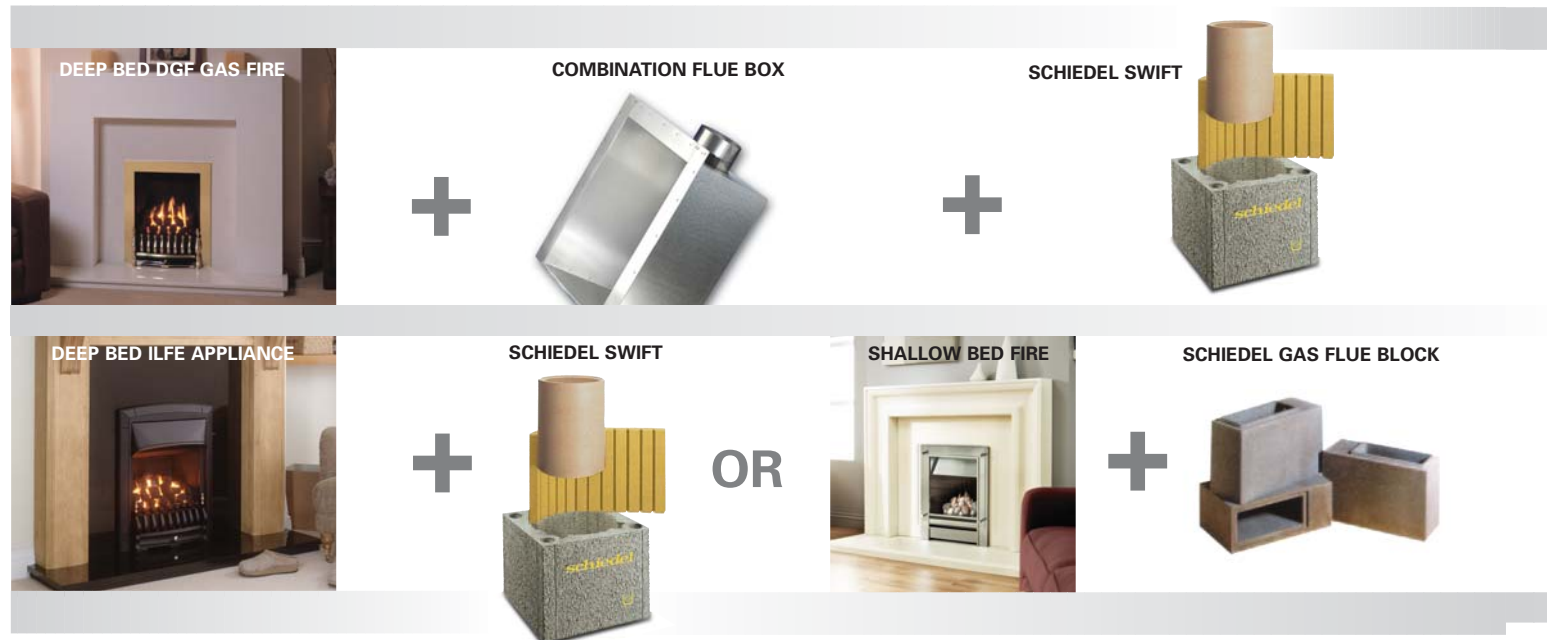

- Carry on with your current fires
- Enjoy the same wide choice of fires
- Lower carbon emissions
- Meets all Part F requirements
- A combined cost effective solution
- Real fire effect

Cosy and convenient

Open fronted gas appliances can give a room all the warmth and atmosphere of a real flame fire - without the hassle!


Selecting an appliance

When selecting a secondary heating appliance under the new Part F it is important to evaluate the carbon output of the appliance.

You can do this by examining a combination of

- the appliance efficiency
- the fuel it uses

The graph below illustrates the combined effect of the fuel, and the appliance efficiency in carbon savings when compared to an electric fire.

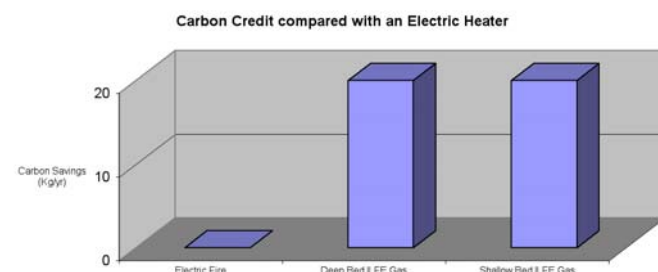

Inset Living Flame Effect Gas Fires

Inset living flame effect gas fires (ILFE) offer efficiencies high enough to produce a carbon credit against an electric fire, and are available in two sizes – deep bed and shallow or narrow bed.

Decorative Gas Fires



The deep bed decorative gas fire (DGF) has a low efficiency of around 20%, and on its own is not enough to produce a carbon credit against an electric fire. However, combined with an efficient flue box, it can. The efficiency of the combined unit has been certified at 45%, and when used in conjunction with a typical 90% primary heating boiler it can give a carbon credit against an electric fire.



The benefit of deep bed fires is that they can create the more authentic impression of an open fire. The DGF does this beautifully with its larger fire viewing area.

The Unique Schiedel Solution

- Schiedel offers the complete chimney package from the ground floor to the chimney pot
- Can include the appliance

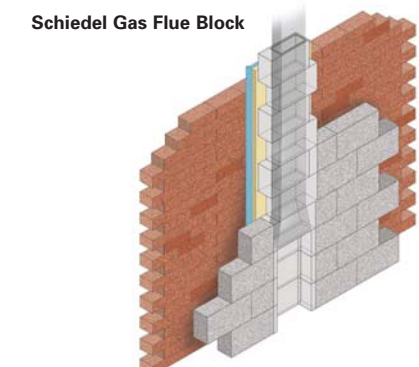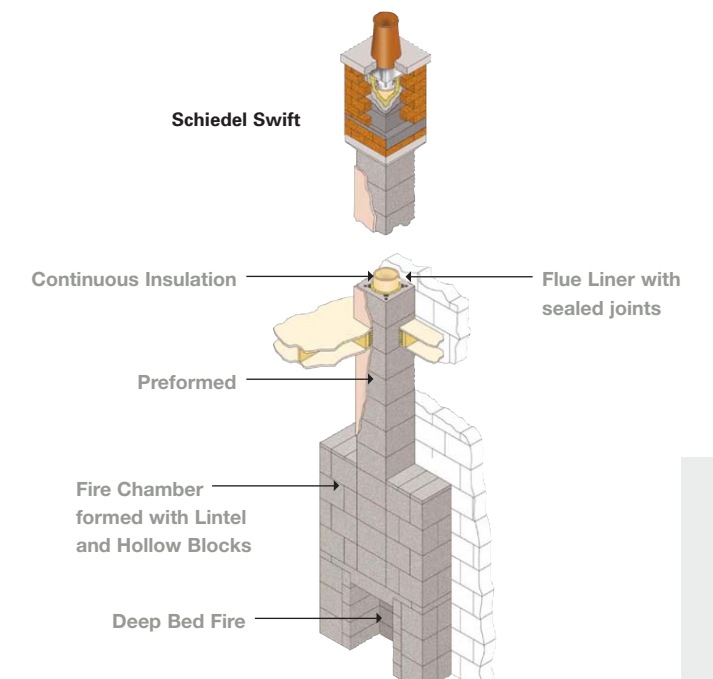

For more information on Schiedel Chimney solutions to Part F, please call **028 8774 0436** or visit **www.schiedel.co.uk**

The warmth and security of a real fire



- Independent heat source for greater fuel security
- Higher carbon savings
- Improved energy efficiency
- Wide range of fires and appliances
- Meets all Part F requirements

Real flame, real benefits

Nothing beats the warmth and cosiness of a real flame fire. It becomes the hub of the home, the focal point for any family, and a feature that more often than not seals the deal for homebuyers.

Stay warm, stay secure

With the rising cost of fuel and even the possibility of a fuel shortage, many people are opting for an independent secondary fuel source with wood or multi fuel. Choosing a stove, an open front convector, a glass fronted fire or an open fire in conjunction with a Schiedel Chimney System provides the perfect solution.


Selecting an appliance

When selecting a secondary heating appliance under the new Part F it is important to evaluate the carbon output of the appliance.

You can do this by examining a combination of

- the appliance efficiency
- the fuel it uses

The graph below illustrates the combined effect of the fuel and the appliance efficiency in carbon savings when compared to an electric fire.

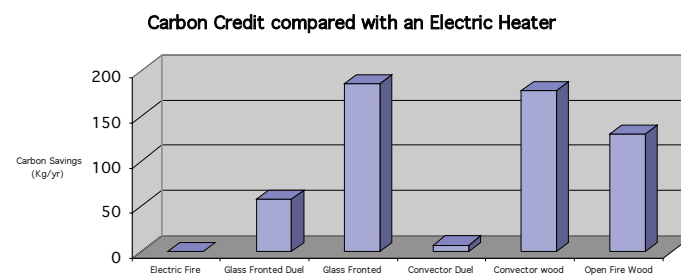

The Open Fire

The open fire can be used under Part F. The low carbon emissions produced when wood burns mean that an open fire set up to burn wood only will give a carbon saving against an electric fire. The addition of a damper will further improve the carbon credit.

The Open Front convector

The open front convector gives the feel of an open fire, but achieves its higher efficiency by heating air in the gap between its two skins and returning it to the room, thus adding convection to the radiant heat of an open fire. This is a useful option if you want a higher carbon credit.

Glass Fronted Appliances

Glass fronted appliances come in a range of styles, from traditional stoves to contemporary insert units. The technology in these appliances means that they can offer efficiencies in excess of 70%. When this efficiency is combined with wood as a fuel the resulting carbon saving against an electric fire is the most impressive.

The Unique Schiedel Solution

- Schiedel offers the complete chimney package from the ground floor to the chimney pot.
- Can include the appliance
- Includes a Universal connector between the appliance and the chimney

For more information on Schiedel Chimney solutions to Part F, please call **028 8774 0436** or visit **www.schiedel.co.uk**

