

Compact Panels • LST Covers



# Compact Panels



Model shown  
Strebel SD610H Panel / Double in RAL 9010

These highly efficient panel style radiators are a simple option when selecting a heat output source for any home.

With BS EN442 certification and up to 10 bar Maximum Working Pressure, these Compact Panels offer choice of placement and suitability for any environment giving you the flexibility to get the balance right with ease of planning.

Coming with a single RAL finish, RAL 9010 they will fit discreetly onto any wall whilst offering a good heat source. The installation package includes all fixing brackets, air vents and wall plugs.

Additional heights and lengths are available upon request.



Model shown  
SP406H Panel – Single with fins in RAL 9010



## Strebel LST Covers

The Strebel LST cover range is perfect for installations in Hospitals, Nurseries, Public Buildings, Retirement Homes and Schools where safety is a primary concern.


The maximum surface temperature is 43°C, fully conforming to all current Health & Safety legislation on such covers.

Whilst they are wall mounted as standard, an optional kick grill is available at additional cost to cover pipework down to the floor level.

They come in a standard RAL 9010 finish for no-nonsense planning and discreet co-ordination with most colour schemes.

Additional safety planning includes the supply of allen key fixings to prevent unauthorised removal and they comply with DHSS NHS Estates specification.

Each standard LST cover has 190mm of space inside to accommodate valves.

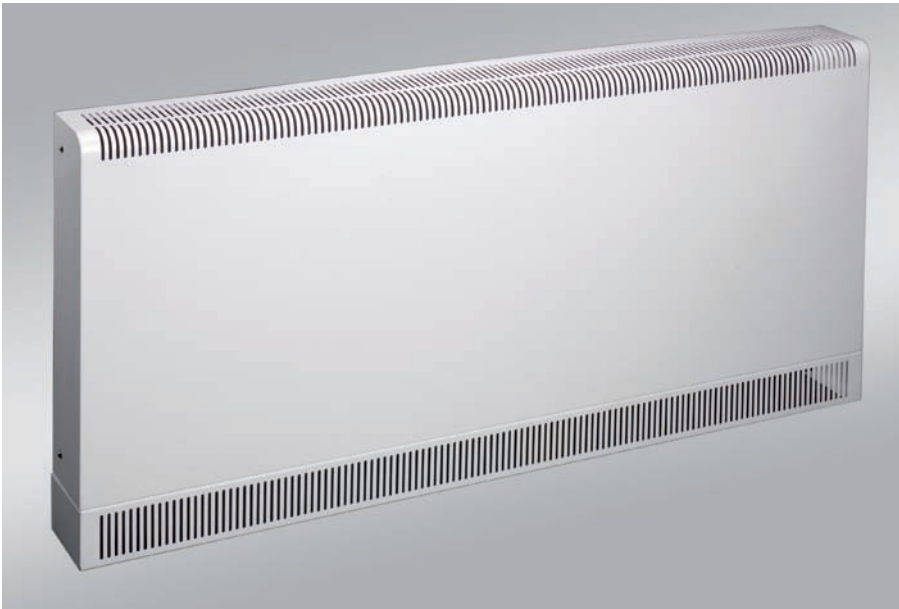

Model shown  
Strebel S21/625-1600 in RAL 9010

Type 21 SP															
Height mm	525	525	525	525	525	625	625	625	625	625	725	725	725	725	725
Length mm	700	1000	1200	1600	2200	700	1000	1200	1600	2200	700	1000	1200	1600	2200
Depth	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135
Rad Size	SS405C	SP408H	SP410H	SP414H	SS420C	SP505H	SP508H	SP510H	SP514H	SP520H	SP605H	SP608H	SP610H	SP614H	SP620H
Watts Delta T 50	328	752	937	1323	1306	553	890	1119	1558	2241	641	1021	1281	1777	2561
BTUs Delta T 50	1120	2565	3198	4516	4455	1887	3037	3819	5314	7646	2188	3484	4369	6064	8740
Watts Delta T 60	421	964	1201	1695	1675	708	1140	1434	1995	2871	820	1307	1639	2275	3278
BTUs Delta T 60	1437	3288	4097	5784	5715	2415	3889	4892	6807	9794	2798	4460	5592	7764	11186
Type 22 SD															
Height mm	525	525	525	525	525	625	625	625	625	625	725	725	725	725	725
Length mm	700	1000	1200	1600	2200	700	1000	1200	1600	2200	700	1000	1200	1600	2200
Depth	160	160	160	160	160	160	160	160	160	160	160	160	160	160	160
Rad Size	SD405H	SD408H	SD410H	SD414H	SD420H	SD505H	SD508H	SD510H	SD514H	SD520H	SD605H	SD608H	SD610H	SD614H	SD620H
Watts Delta T 50	613	968	1210	1694	2353	726	1159	1450	2029	2899	840	1343	1679	2351	3358
BTUs Delta T 50	2090	3301	4129	5780	8029	2476	3956	4946	6924	9892	2865	4581	5729	8020	11459
Watts Delta T 60	783	1238	1548	2167	3010	928	1483	1854	2596	3708	1074	1718	2148	3007	4296
BTUs Delta T 60	2672	4224	5282	7394	10270	3166	5060	6326	8858	12652	3664	5862	7329	10260	14658