

CERAMIC COAL FUEL EFFECT INSTALLER AND OWNER GUIDE

THIS GUIDE IS FOR FITTING THE CERAMIC

COAL FUEL EFFECT TO THE

AIRFLAME

MODEL

ONLY

IMPORTANT

THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED TO THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE. IT MUST BE LEFT WITH THE OWNER.

THIS GUIDE MUST BE READ IN CONJUNCTION WITH THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE.

INSTALLER AND OWNER GUIDE

© Baxi Heating U.K. Limited 2006.

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying), stored in any medium by electronic means (including in any retrieval system or database) or transmitted, in any form or by any means, whether electronic, mechanical, recording or otherwise, without the prior written permission of the copyright owner.

Applications for the copyright owner's permission to reproduce any part of this publication should be made, giving details of the proposed use, to the following address:
The Company Secretary, Baxi Heating UK Limited, Pentagon House, Sir Frank Whittle Road, Derby, DE21 4XA.

Warning: Any person who does any unauthorised act in relation to a copyright work may be liable to criminal prosecution and civil claims for damages.

Baxi Fires Division, Erdington, Birmingham B24 9QP

Because our policy is one of constant development and improvement, details may vary slightly from those given in this publication

INSTALLER AND OWNER GUIDE

CONTENTS

| <u>Section</u> | <u>Page</u> |
|---|-------------|
| Safety | 3 |
| Fitting the front and rear base coals | 3 |
| Fitting the dress coals to models with a 16 inch wide burner tray | 4 |
| Fitting the dress coals to models with a 18 inch wide burner tray | 6 |

SAFETY

This product uses fuel effect pieces and burner compartment walls containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.

This appliance does not contain any component manufactured from asbestos or asbestos related products.

FITTING THE FRONT AND REAR BASE COALS

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

1. Placing the front base coal

Remove the front base coal from its protective packaging and position in front of the burner as shown in figure 1. It should fit snugly between the burner and the three raised tabs on the front edge of the tray.

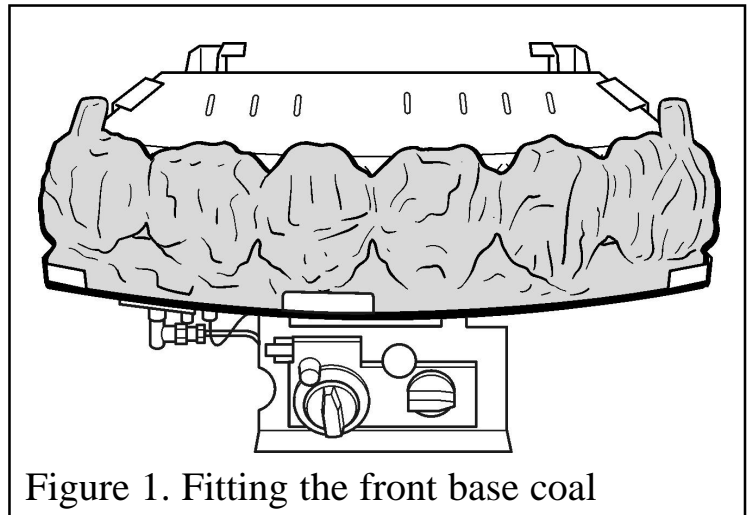


Figure 1. Fitting the front base coal

INSTALLER AND OWNER GUIDE

2. Placing the rear base coal

Remove the rear base coal from its protective packaging and position it on top of the burner as shown in figure 2. The rear face should locate into two cut-outs on the top face of the rear legs. Ensure that the rear base coal sits flatly on the top of the burner.

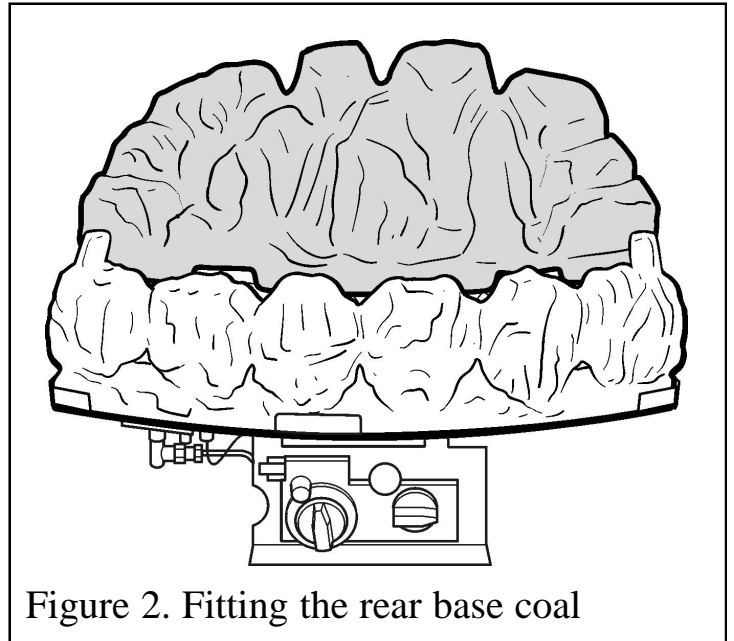


Figure 2. Fitting the rear base coal

FITTING THE DRESS COALS TO MODELS WITH A 16 INCH WIDE BURNER TRAY

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

Open the bag containing the dress coals. Inside there will be a further three bags. These contain:

- 3 x Square dress coals.
- 16 x Random cut dress coals.

1. Open the bags and keep the different types of coals separate. Take five random coals and place along the front base coal as shown in figure 3. Ensure that these coals bridge across from the front base coal to the rear base coal.

In order to achieve the best flame effect, it is important that the coals are evenly spaced, and sit 10 -15mm from each other.

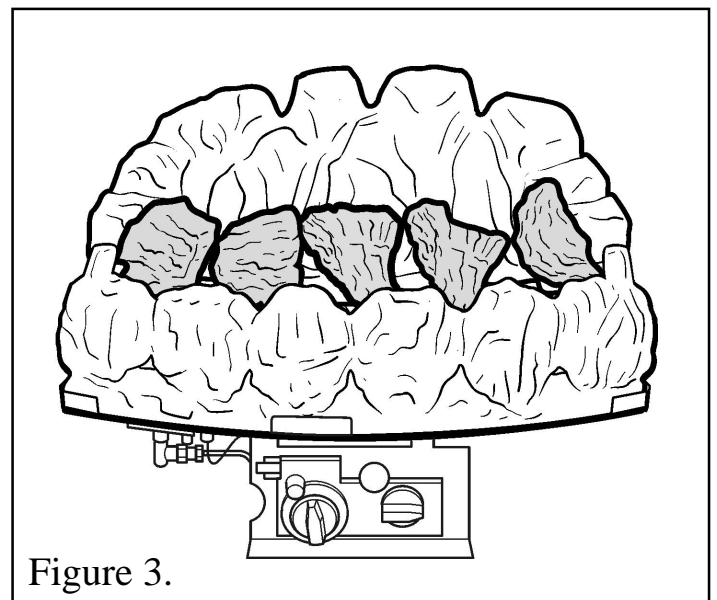


Figure 3.

INSTALLER AND OWNER GUIDE

2. Take six random shaped dress coals and position as shown in figure 4. This second row of dress coals should rest on top of the first row, overlapping by 5 - 10mm. Again, ensure even spacing to obtain the best flame effect.




3. NATURAL GAS MODELS ONLY:

Take five random shaped dress coals and arrange as shown in figure 5. Again, these dress coals should overlap the previous row by 5 - 10mm. Once again ensure even spacing.

3. PROPANE MODELS ONLY:

Take three random shaped dress coals and position in the centre as shown in figure 5. Again, these dress coals should overlap the previous row by 5 - 10mm. Once again ensure even spacing. Discard the two remaining random dress coals.

4. Finally, take the three remaining square dress coals and position as shown in figure 6. These coals should also overlap the previous row by 5 - 10mm. Again, ensure even spacing.

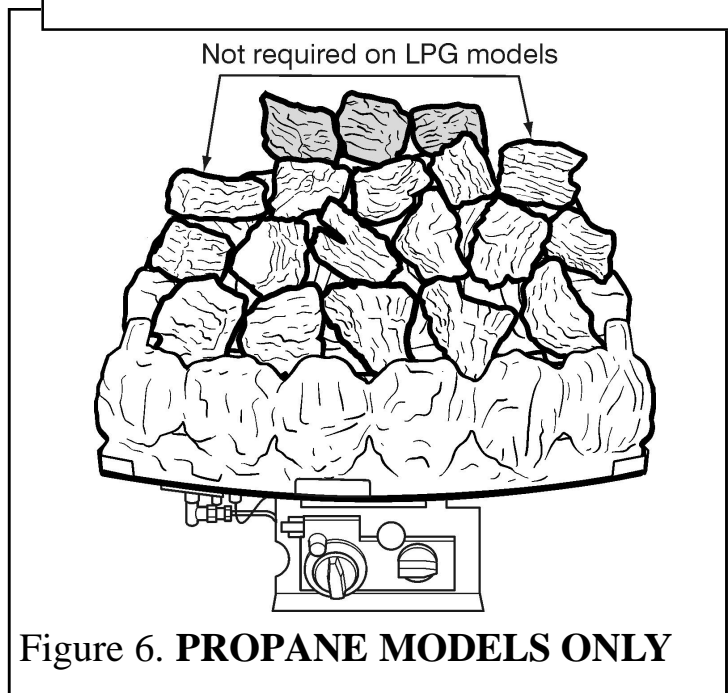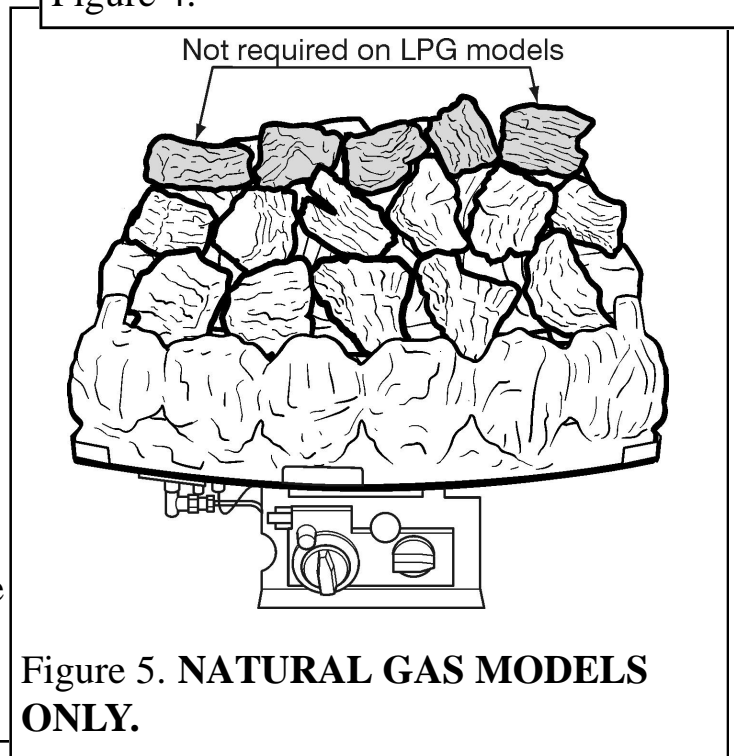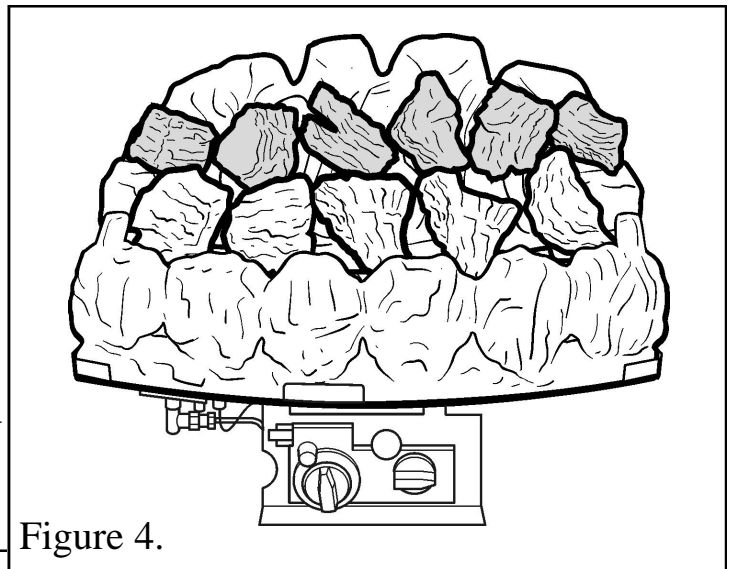

INSTALLER AND OWNER GUIDE

FITTING THE DRESS COALS TO MODELS WITH A 18 INCH WIDE BURNER TRAY


For 16 inch wide models see previous section

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.


Open the bag containing the dress coals. Inside there will be a further two bags. These contain:

- 6 x Finger dress coals (long and narrow).
- 18 x Random cut dress coals.

1. Open the bags and keep the different types of coals separate. Place six random shaped dress coals as shown in figure 7, ensuring that they form a bridge between the front base coal and the rear base coal. In order to get the best flame effect, it is important that the dress coals are evenly spaced, and sit 10 - 15mm from each other.

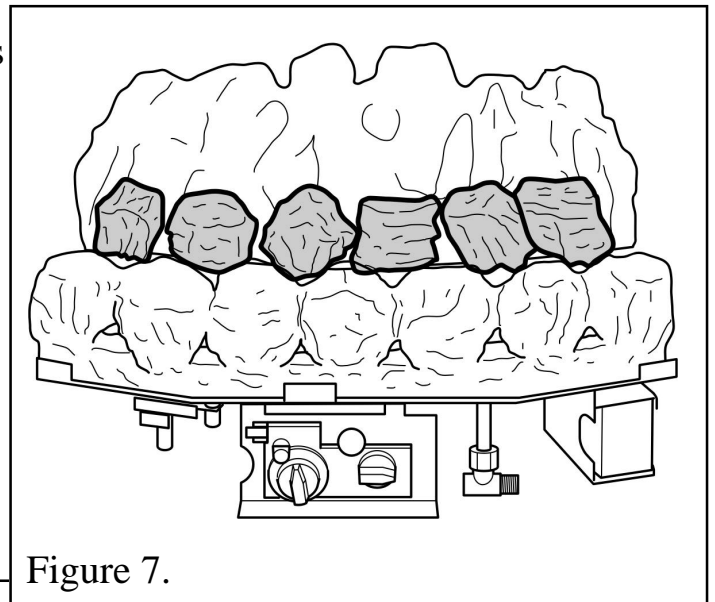

2. Take five random shaped dress coals and position as shown in figure 8. This second row of dress coals should rest on top of the first row, overlapping by 5 - 10mm. Again, ensure even spacing to obtain the best flame effect.

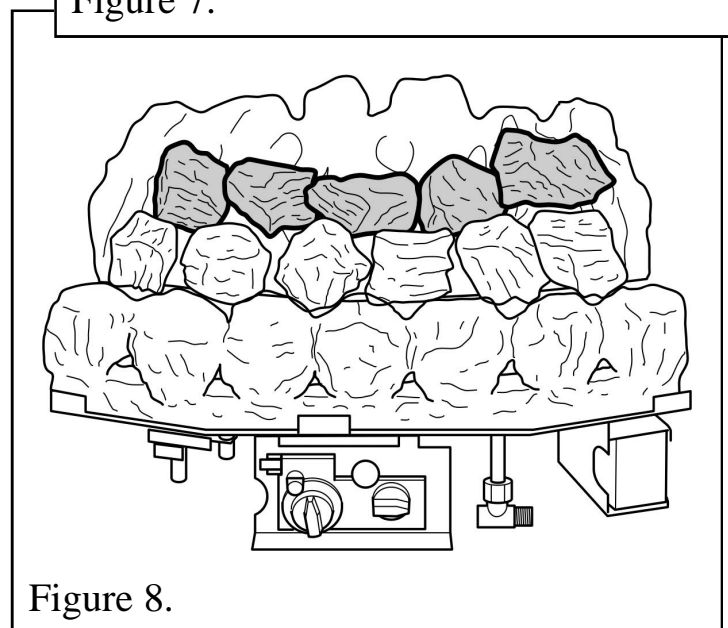

INSTALLER AND OWNER GUIDE

3. Take four random shaped dress coals and position as shown in figure 9 to make the third row. These dress coals should again overlap the previous row by about 5 - 10 mm. Ensure even spacing to obtain the best flame effect.

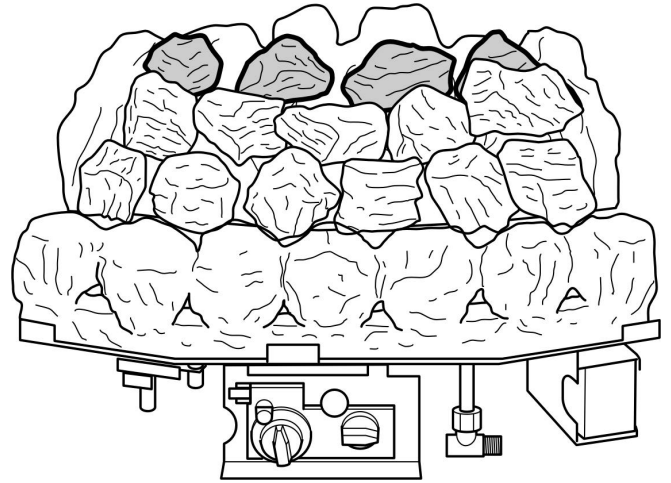


Figure 9.

4. Take four finger dress coals and position as shown in figure 10.

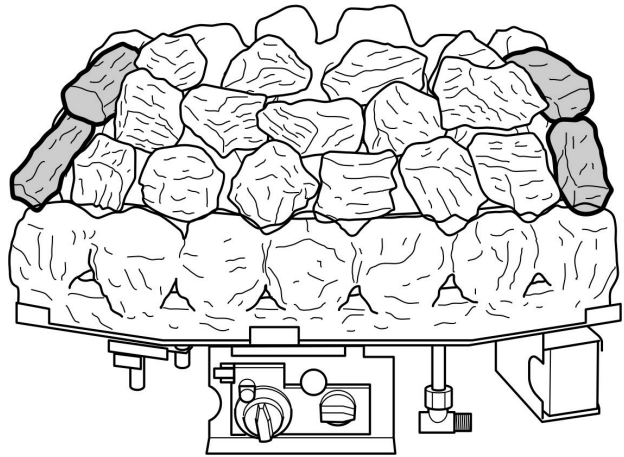


Figure 10.

5. Take the three remaining random shaped dress coals. Place one in the centre (Figure 11 - position 'A'), place the other two next to it (Figure 11 - position 'B'). To complete, place the two remaining finger dress (Figure 11 - position 'C').

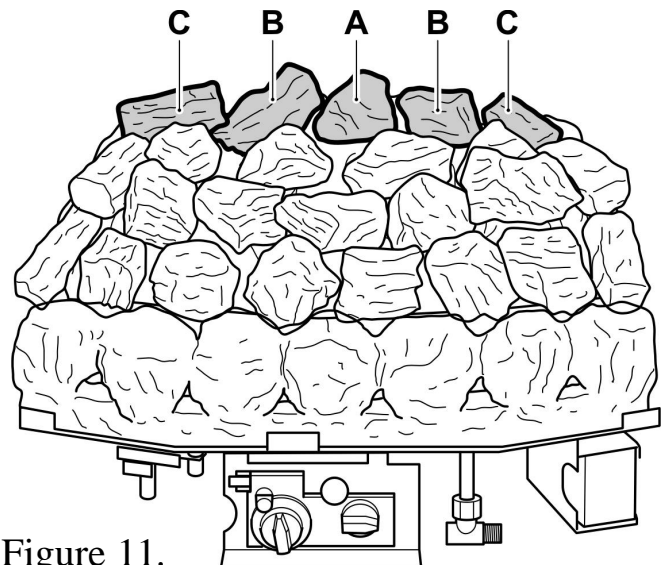


Figure 11.