


# DXPV230/230/2/5(P)S PV Solar Pack

## 2.3kWp Photovoltaic Kit for domestic and light commercial electricity

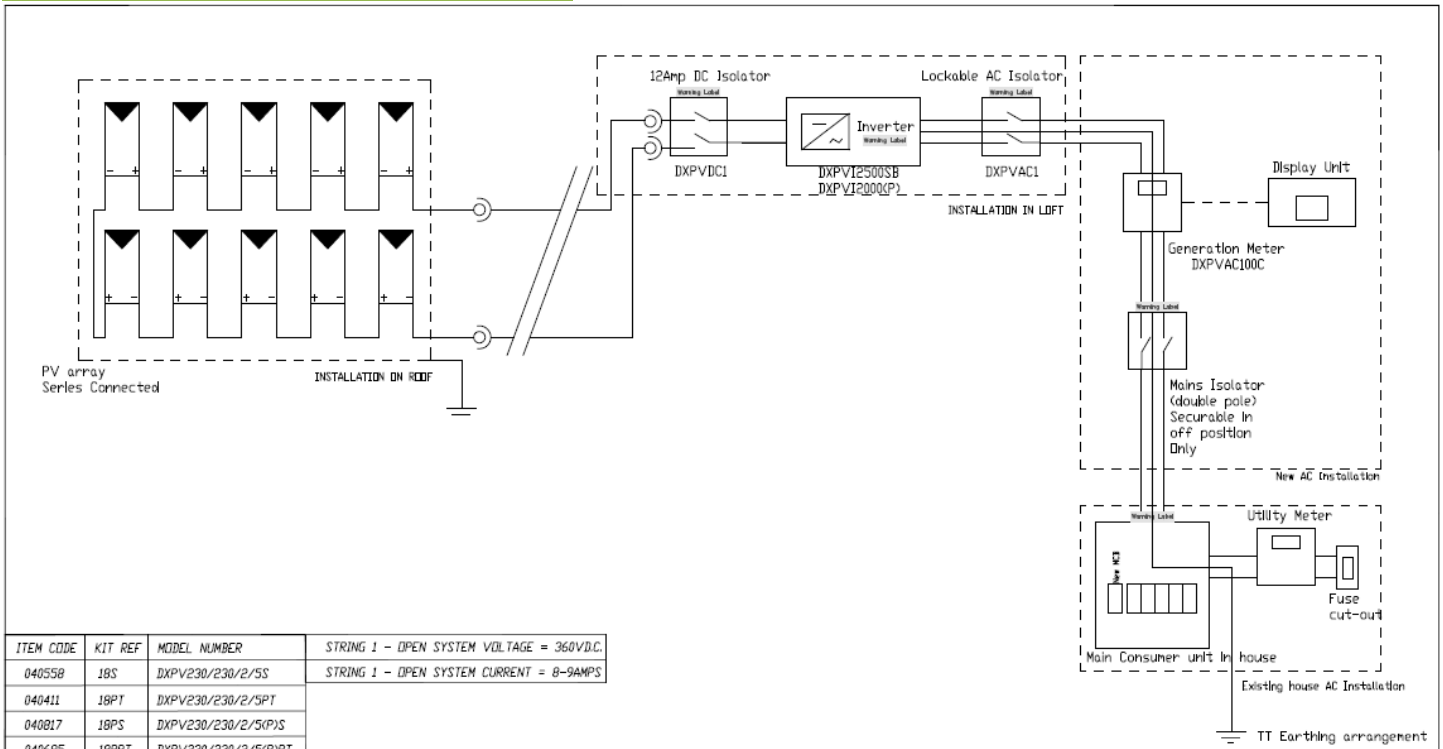

ITEM CODE	KIT REF	MODEL NUMBER	STRING 1 - OPEN SYSTEM VOLTAGE = 360V D.C.
040558	1BS	DXPV230/230/2/5S	STRING 1 - OPEN SYSTEM CURRENT = 8-9AMPS
040411	1BPT	DXPV230/230/2/5PT	
040817	1BPS	DXPV230/230/2/5(P)S	
040695	1BPPPT	DXPV230/230/2/5(P)PT	

Part Number	Model Number	Description	Quantity
038715	DXPVM230P6-30	230W Poly Solar PV Panel	10
038746	DXPVAC100C	Total generation meter	1
038777	DXPVAC1	32A 690V AC surface mounted isolator (lockable)	1
038760	DXPVDC1	12A 500V 2 pole DC surface mounted isolator (lockable)	1
039767	DXPVRKHEXM820-10	Bag of 10 x Cylinder Head Screw with Hexagon Socket DIN 912 A2 M8x20	2
040299	DXPVRKHEXM820-25	Bag of 25 x Cylinder Head Screw with Hexagon Socket DIN 912 A2 M8x20	1
039774	DXPVRKHEXM850-10	Bag of 10 x Cylinder Head Screw with Hexagon Socket DIN 912 A2 M8x50	3
041371	DXPVRKHEXM825-10	Bag of 10 x Cylinder Head Screw with Hexagon Socket DIN 912 A2 M8x25	4
041395	DXPVRKM8N1-10	Bag of 10 x Serated nut A2 DIN 6923	4
039781	DXPVRKSBM81-10	Bag of 10 x Sliding Block 13x10mm, Pivotal, Aluminium, M8, 1=22mm	3
039736	DXPVRKCT1	Bag of 25 x Cable Ties-UV-Resistant	3
039675	DXPVRKEC1	Bag of 4 x End Cap PP, 40x40mm	3
039699	DXPVRKMC1	Bag of 4 xMG-MK 01, Middle Clamp, blank	5
039750	DXPVRKXC1	Bag of 4 x Cross connector (74011001)	10
039682	DXPVRKCC1	Bag of 4 x Corner Clamp, blank 50mm	3
039644	DXPVRKMR5	Mounting Rail medium 40x40 , L = 5.2M	4
039729	DXPVRKRHST1	Slate Roof Hook, stainless steel,	36
039811	DXPVRKSB100-25	Bag of 25 x Seating Bolt 8x100mm galvanised	3
038999	DXPVI2000(P)	PVI-2000-OUTD	1
038784	DXPVC10/1	10 meter extension cable Male/Female MC3; 4mm2 (+) MC3 -- 10 meters 4mm2-- MC4 (-)	1
040220	DXPVC10/2	10 meter extension cable Male/Female MC3; 4mm2 (-) MC3 -- 10 meters 4mm2 -- MC4 (+)	1
040366	DXPVP052	Installation manual	1
040183	DXPVWLPK1	PV Array 19 label Pack	1

# Polycrystalline PV Solar Packs


## Specifications

<b>Inverter</b>	1 x PVI-2000-OUTD
<b>Roof Mount</b>	Slate tile roof kit
<b>Meter</b>	1 x Elster A100
<b>Cabling</b>	10m Positive and 10m Negative Solar Cable
<b>Isolators</b>	1 x DC and 1 x AC isolator
<b>Documentation</b>	1 x Installation Manual

<b>Product Performance</b>
5 years: 95% of rated peak output
10 years: 90% of rated peak output
15 years: 85% of rated peak output
25 years: 80% of rated peak output

<b>Requirements</b>
Dimplex Renewables PV Packs must be installed by Accredited PV Pack Installers
All Accredited PV Pack Installers are MCS-accredited for PV

<b>Certification</b>
IEC61215
IEC61730
CE conformity
MCS

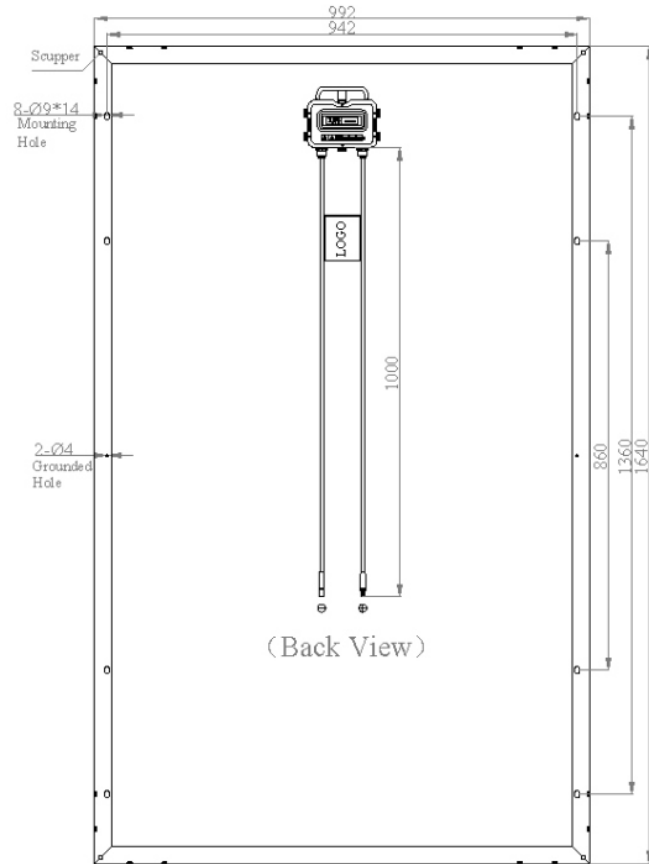

## Electrical Performance

Electrical Performance of PV Module	DXPVM230P6-30
Open Circuit Voltage	36.65V
Short circuit current	8.59A
Peak Power in STC	230W
Point Voltage in Peak Power	29.00V
Point Current in peak Power	7.99A
Efficiency of Module	14.2%
Cell Type	Polycrystalline
Cell Quantity	60 (6 x 10)
Module Size	1640mm x 992mm x 50mm
Weight	20.5Kg
Operation temperature	-40°C ~ 85°C
Temperature coefficient in Short Circuit Current	(0.055 ± 0.01)%/K
Temperature coefficient in Open Circuit Voltage	-(113 ± 10)Mv%/K
Temperature coefficient in Peak Power	(0.47 ± 0.05)%/K
Output Power Tolerance	-0% + 3%
Max System voltage	1000V DC



MCS PV0017