


## Deco Convector



The Strebel Deco Convecter is a simple and effective way to provide heat where height is limited. The range between 70-280 mm high allows locations such as under a summer bench inside a conservatory to be a realistic option for placement.

With the option to be either wall mounted or the more usual floor mounted, variety is a major part of the DECO convectors sales attraction. As is usual, the selection of RAL finishes

is wide open to the customers' desires, thereby opening up the possibility of co-ordinating colour to match a particular room.

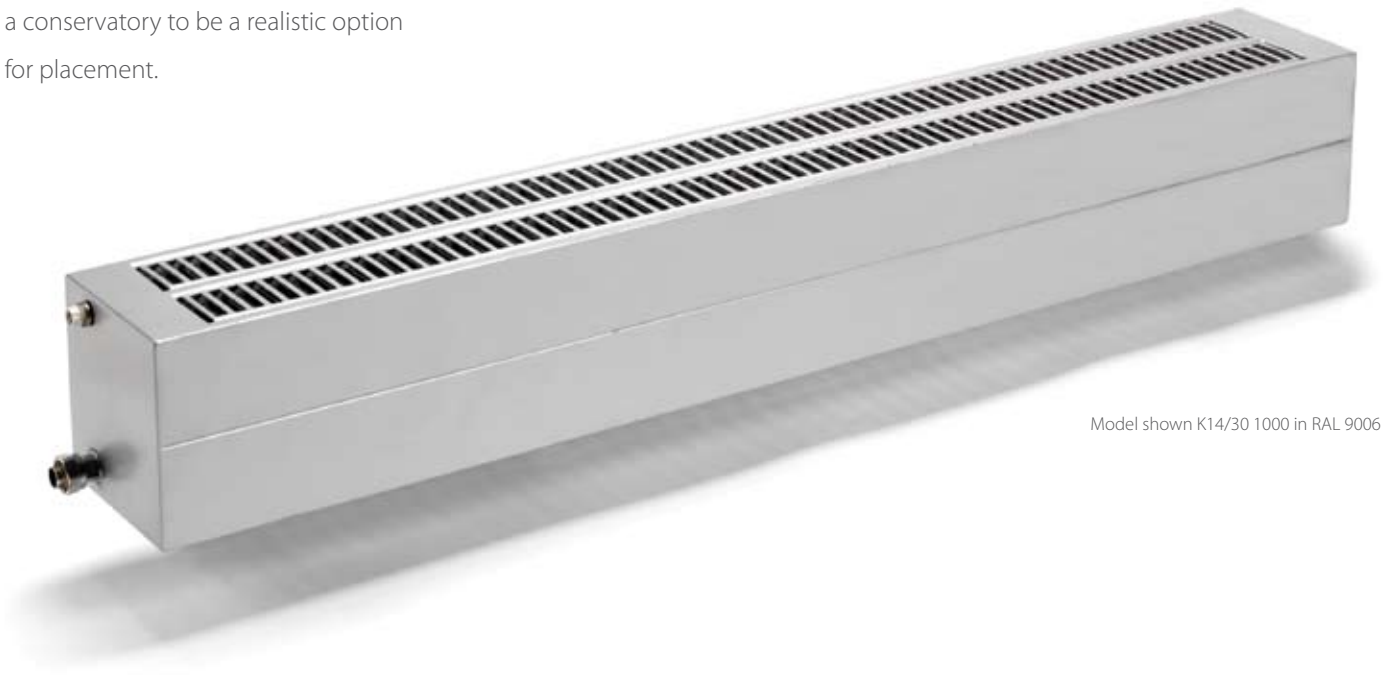

Model shown K14/30 1000 in RAL 9006



Model shown K21/20 1000 in RAL 9010

Additional sizes & details available upon request

| Deco Convecter |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |
|----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Code           | K7/20  | K7/20  | K7/20  | K7/20  | K7/20  | K7/20  | K7/20  | K7/20  | K7/20  | K7/20  | K7/20  | K14/20 | K14/20 | K14/20 | K14/20 | K14/20 | K14/20 | K14/20 | K14/20 | K14/20 | K14/20 |        |
| Height         | 70     | 70     | 70     | 70     | 70     | 70     | 70     | 70     | 70     | 70     | 70     | 140    | 140    | 140    | 140    | 140    | 140    | 140    | 140    | 140    | 140    |        |
| Depth          | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     |        |
| Length         | 500    | 600    | 700    | 800    | 900    | 1000   | 1200   | 1400   | 1600   | 1800   | 2000   | 500    | 600    | 700    | 800    | 900    | 1000   | 1200   | 1400   | 1600   | 1800   | 2000   |
| Ouput @ 50°ΔT  | 179    | 215    | 251    | 286    | 322    | 358    | 430    | 501    | 573    | 644    | 716    | 278    | 334    | 389    | 445    | 500    | 556    | 667    | 778    | 890    | 1001   | 1112   |
| Ouput @ 60°ΔT  | 226    | 271    | 316    | 360    | 406    | 451    | 542    | 631    | 722    | 811    | 902    | 350    | 421    | 490    | 561    | 630    | 701    | 840    | 980    | 1121   | 1261   | 1401   |
| Code           | K21/20 | K21/20 | K21/20 | K21/20 | K21/20 | K21/20 | K21/20 | K21/20 | K21/20 | K21/20 | K21/20 | K28/20 | K28/20 | K28/20 | K28/20 | K28/20 | K28/20 | K28/20 | K28/20 | K28/20 | K28/20 | K28/20 |
| Height         | 210    | 210    | 210    | 210    | 210    | 210    | 210    | 210    | 210    | 210    | 210    | 280    | 280    | 280    | 280    | 280    | 280    | 280    | 280    | 280    | 280    | 280    |
| Depth          | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     | 66     |
| Length         | 500    | 600    | 700    | 800    | 900    | 1000   | 1200   | 1400   | 1600   | 1800   | 2000   | 500    | 600    | 700    | 800    | 900    | 1000   | 1200   | 1400   | 1600   | 1800   | 2000   |
| Ouput @ 50°ΔT  | 368    | 441    | 515    | 588    | 662    | 735    | 882    | 1029   | 1176   | 1323   | 1470   | 446    | 535    | 624    | 714    | 803    | 892    | 1070   | 1249   | 1427   | 1606   | 1784   |
| Ouput @ 60°ΔT  | 464    | 556    | 649    | 741    | 834    | 926    | 1111   | 1297   | 1482   | 1667   | 1852   | 562    | 674    | 786    | 900    | 1012   | 1124   | 1348   | 1574   | 1798   | 2024   | 2248   |