

CERAMIC LOG FUEL EFFECT INSTALLER AND OWNER GUIDE

THIS GUIDE IS FOR FITTING THE CERAMIC

LOG FUEL EFFECT TO THE

AIRFLAME 16NV

MODELS ONLY.

DO NOT USE ON 18 INCH OR XL BURNERS.

IMPORTANT

THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED TO THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE. IT MUST BE LEFT WITH THE OWNER.

THIS GUIDE MUST BE READ IN CONJUNCTION WITH THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE.

INSTALLER AND OWNER GUIDE

© Baxi Heating U.K. Limited 2007.

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying), stored in any medium by electronic means (including in any retrieval system or database) or transmitted, in any form or by any means, whether electronic, mechanical, recording or otherwise, without the prior written permission of the copyright owner.

Applications for the copyright owner's permission to reproduce any part of this publication should be made, giving details of the proposed use, to the following address: The Company Secretary, Baxi Heating UK Limited, The Wyvern Business Park, Stanier Way, Derby, DE21 6BF.

Warning: Any person who does any unauthorised act in relation to a copyright work may be liable to criminal prosecution and civil claims for damages.

Baxi Fires Division, Erdington, Birmingham B24 9QP

Because our policy is one of constant development and improvement, details may vary slightly from those given in this publication

SAFETY


This product uses fuel effect pieces and burner compartment walls containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.

This appliance does not contain any component manufactured from asbestos or asbestos related products.


The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

INSTALLER AND OWNER GUIDE

1. Remove the rear base from its protective packaging and position it on top of the burner as shown in figure 1. The rear face should locate into two cut-outs on the top face of the rear legs. Ensure that the rear base log sits flatly on the top of the burner.

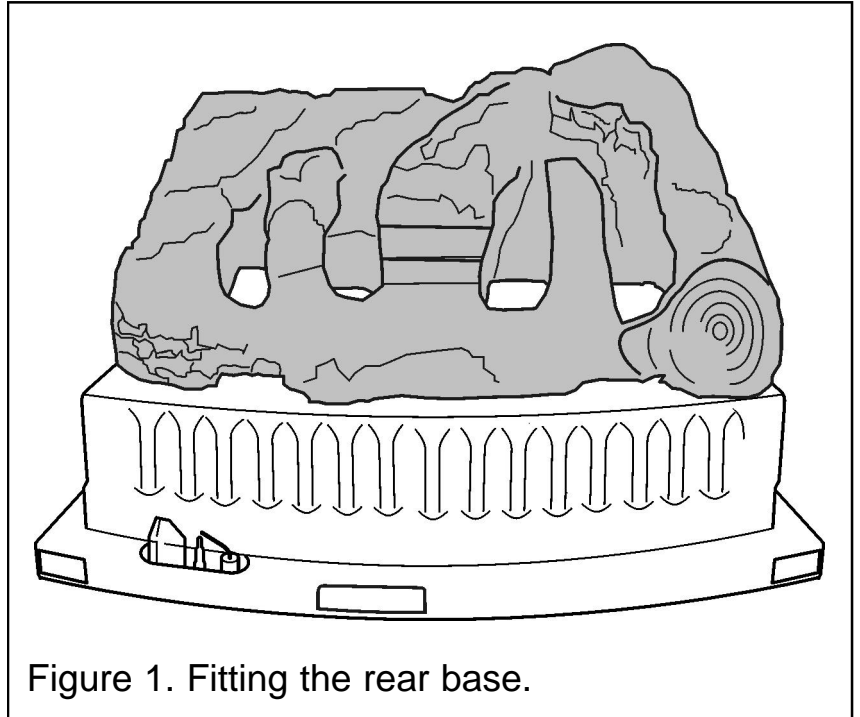

2. Remove the right hand front base log from its protective packaging and position it in front of the burner as shown in figure 2.

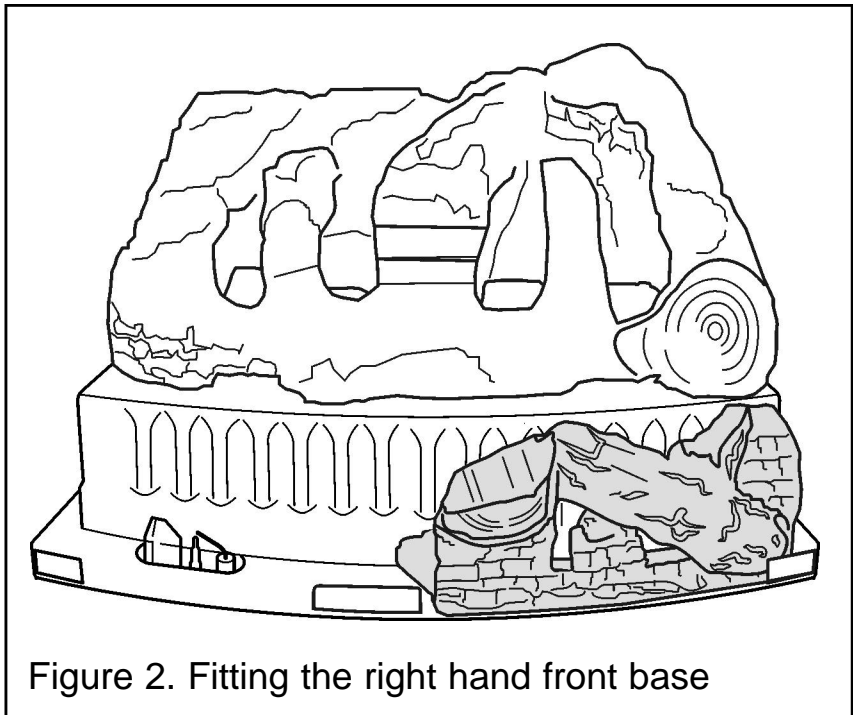

INSTALLER AND OWNER GUIDE

3. Remove the left hand front base log from its protective packaging and position it in front of the burner as shown in figure 3. Gently push the left and right front logs together to close the gap between them.

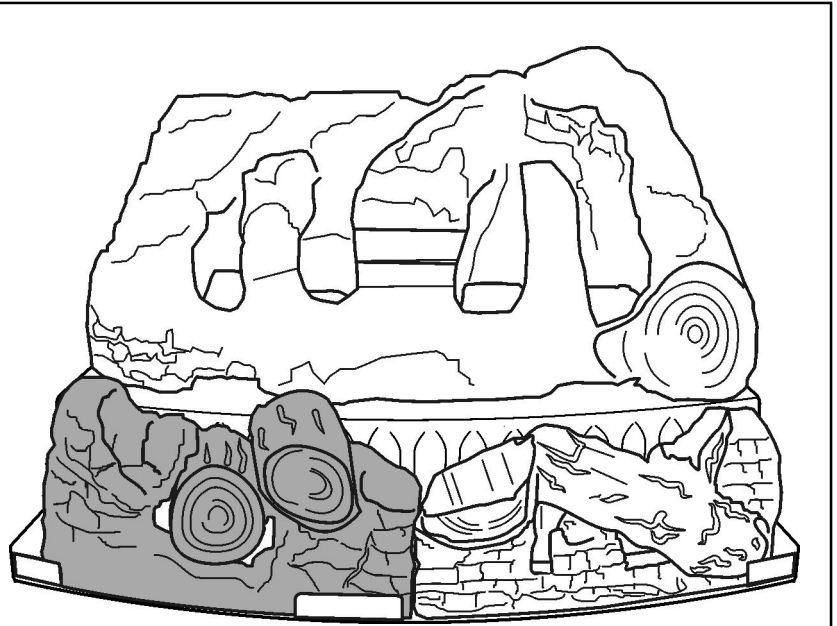


Figure 3. Fitting the left hand front base log

4. Remove log number '1' from its protective packaging and position it as shown in figure 4. When located correctly the front face will complete the log end on the right hand front base.

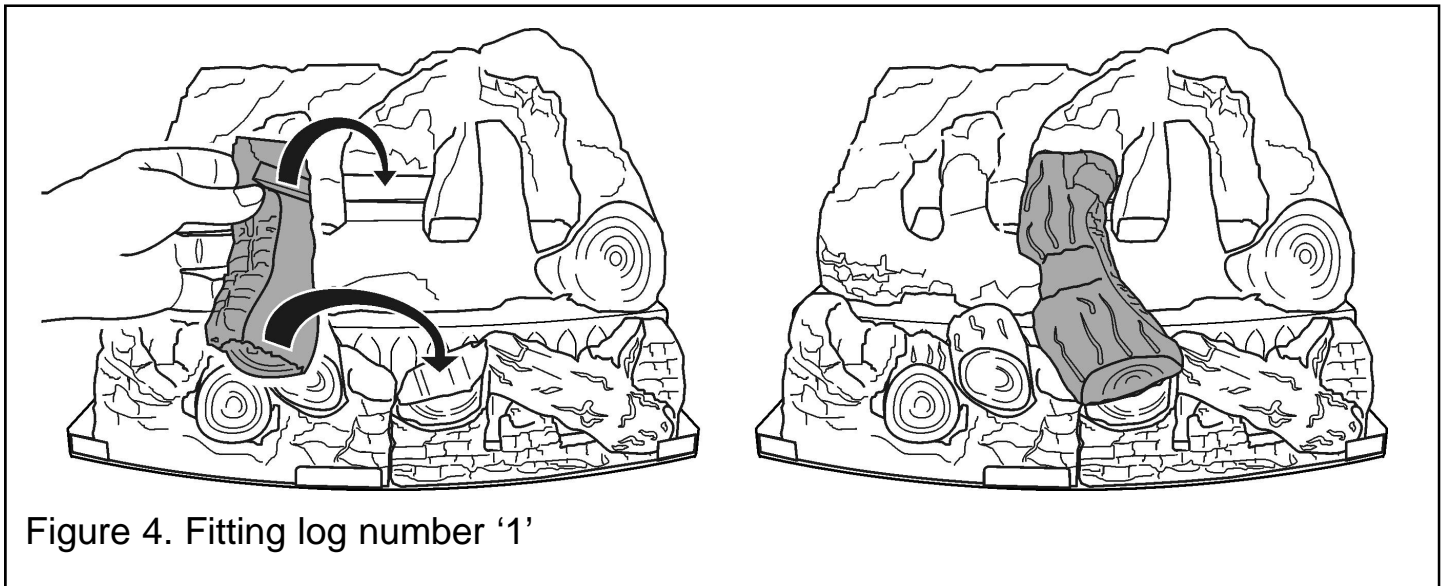


Figure 4. Fitting log number '1'

INSTALLER AND OWNER GUIDE

5. Remove log number '5' from its protective packaging and position it as shown in figure 5.

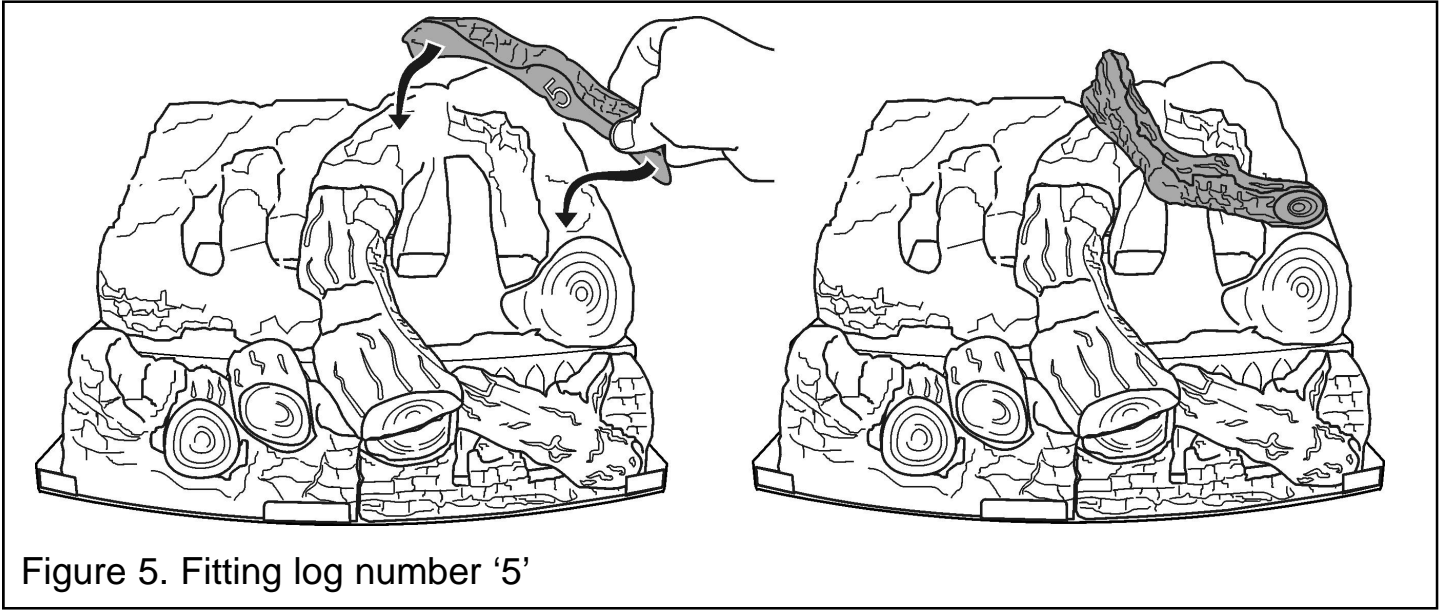


Figure 5. Fitting log number '5'

6. Remove log number '6' from its protective packaging and position it as shown in figure 6.


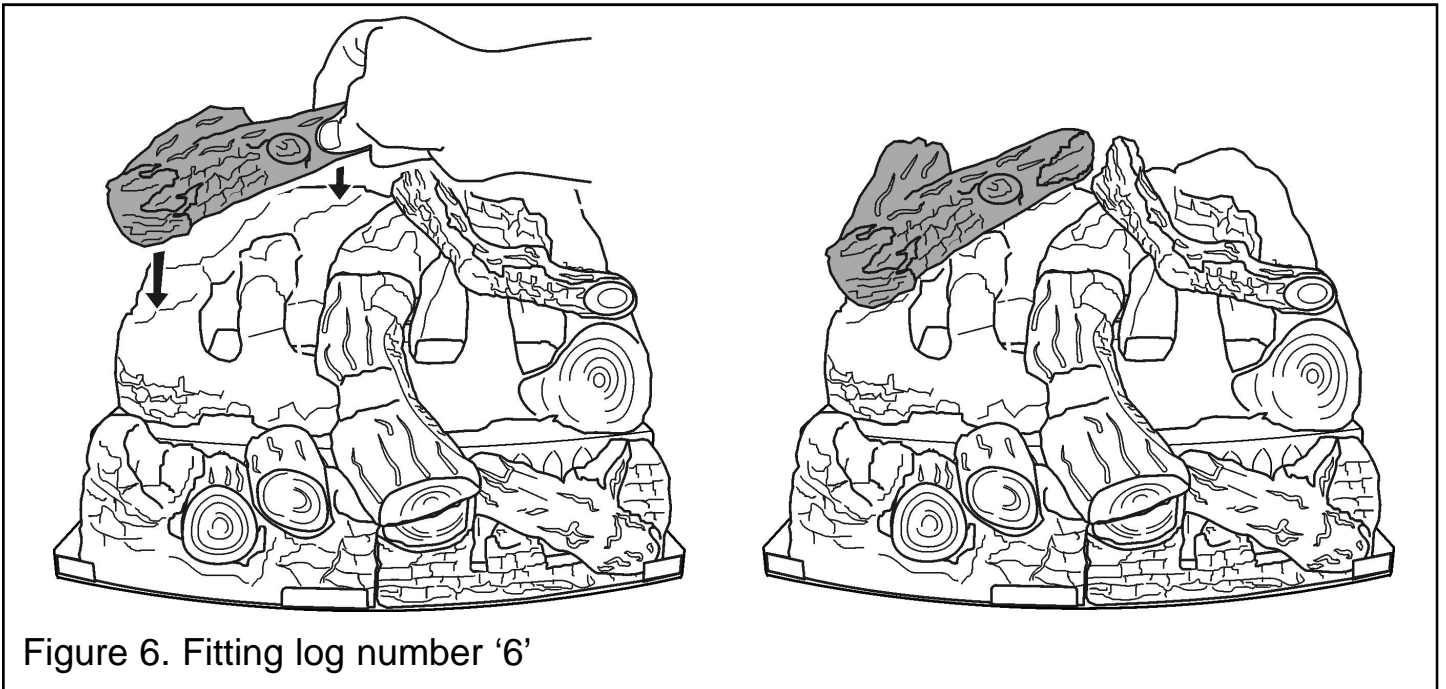



Figure 6. Fitting log number '6'

INSTALLER AND OWNER GUIDE

7. Remove log number '4' from its protective packaging and position it as shown in figure 7.

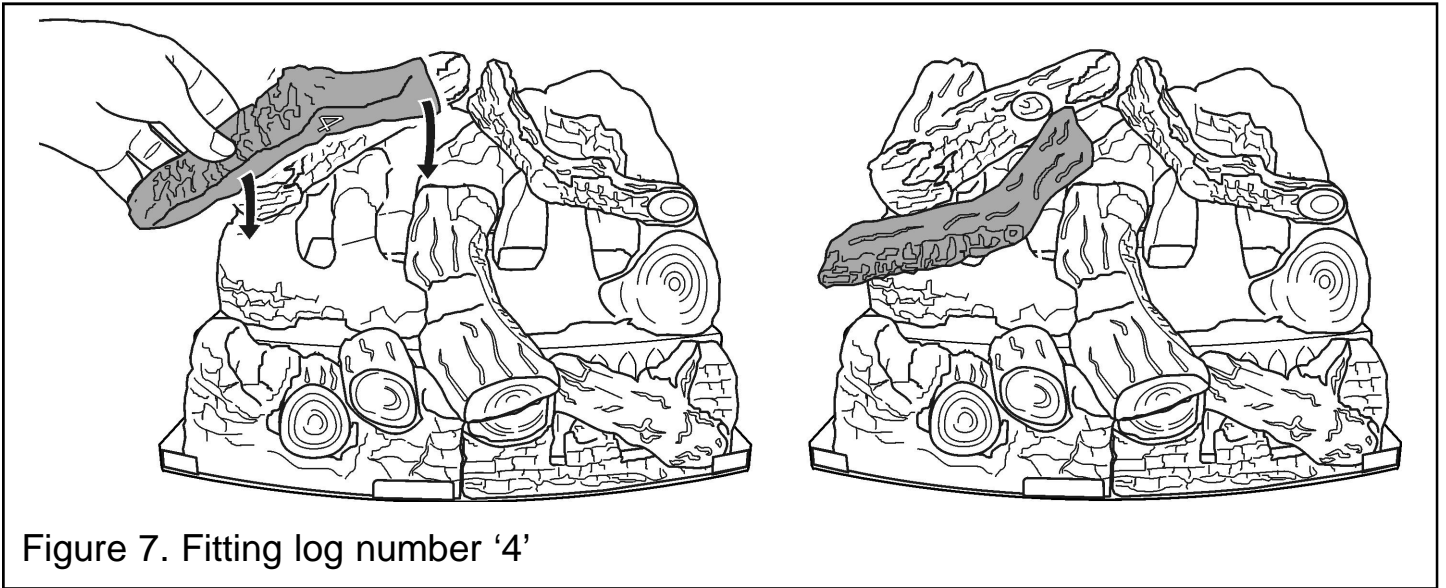

8. Remove log number '3' from its protective packaging and position it as shown in figure 8.

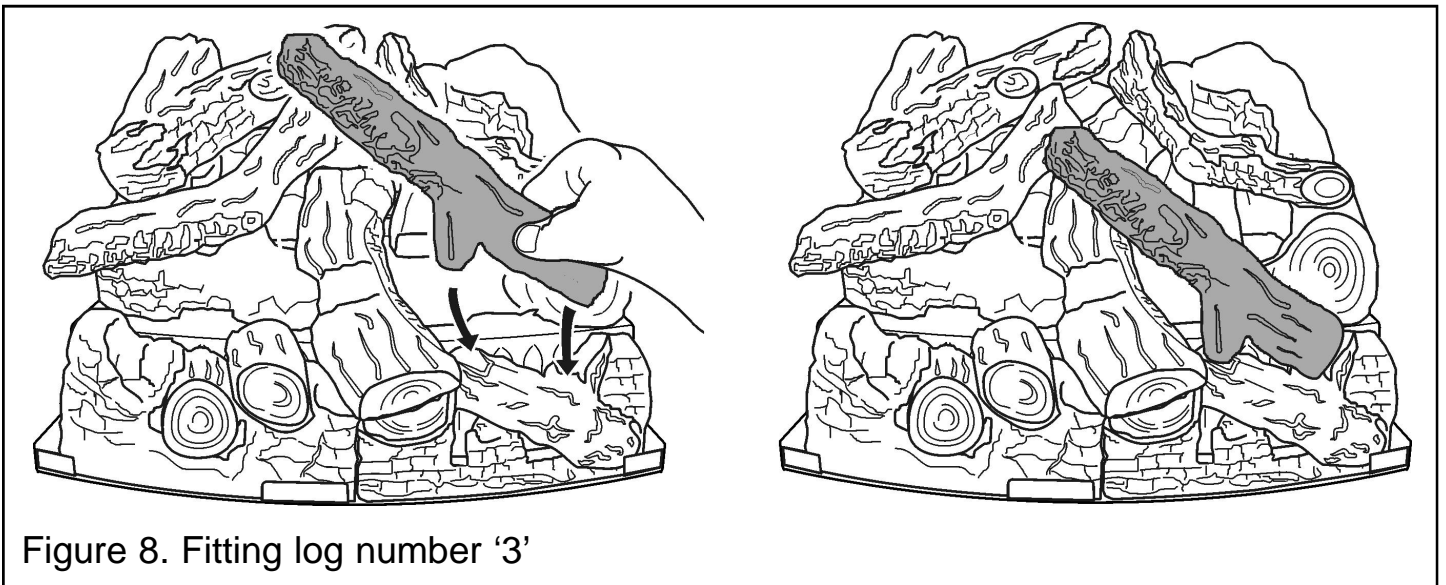

INSTALLER AND OWNER GUIDE

9. Remove log number '2' from its protective packaging and position it as shown in figure 9.

