



Johnson & Starley

ventilation solutions




Dryflow Range

Dryflow 'A' Series



Dimensions

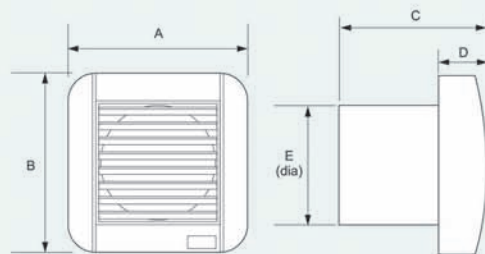

	A	B	C	D	E
A25 Series:	155	155	92	35	97
A50 Series:	180	180	121	51	119
A80 Series:	209	209	137	52	149

All measurements in mm.

The Dryflow 'A' series is a range of Axial Extract Fans for use in Kitchens, Bathrooms, Utility rooms and Cloak rooms. All models come complete with gravity grille shutter, offer a range of options (See selection table) and are suitable for wall, window and ceiling applications.

Features

- Gravity grille as standard
- Casing in high quality technopolymer
- Hot running self lubricating motor with thermal cut off
- Dynamic crystal head humidistat sensor
- Adjustable timer and humidistat
- Anti-spike protection
- Optional wall and window kits
- 2 year guarantee


Approvals

- C.E. Marked
- BEAB approved
- KEYMARK approved
- IPX4 Splashproof Rating

	Standard	Pullcord	Timer	Humidistat, Pullcord, Timer	2 Speed, Humidistat, Pullcord, Timer	Low Voltage, Standard	Low Voltage, Pullcord, Timer	Low Voltage, Humidistat, Pullcord, Timer
Bathroom/WC Max Extract 80m³/h								
A25	✓							
A25 P		✓						
A25 T			✓					
A25 HPT				✓				
A25 H2P					✓			
A25 LV						✓		
A25 PLV							✓	
A25 TLV								✓
A25 HPTLV								✓
Utility Room Max Extract 150m³/h								
A50	✓							
A50 P		✓						
A50 T			✓					
A50 HPT				✓				
A50 H2P					✓			
Kitchen Max Extract 290m³/h								
A80	✓							
A80 P		✓						
A80 T			✓					
A80 HPT				✓				
A80 H2P					✓			


Dryflow 'C' Series

Dimensions

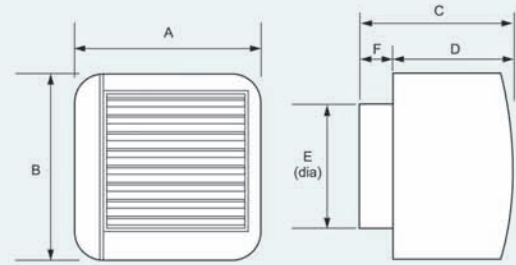

	A	B	C	D	E	F
C25 Series:	160	160	119	89	97	30

The Dryflow 'C' series is a range of Centrifugal Extract Fans for use in Kitchens, Bathrooms, Utility rooms and Cloak rooms. All models come complete with spring loaded shutter, offer a range of options (See selection table) and are suitable for wall and ceiling applications.

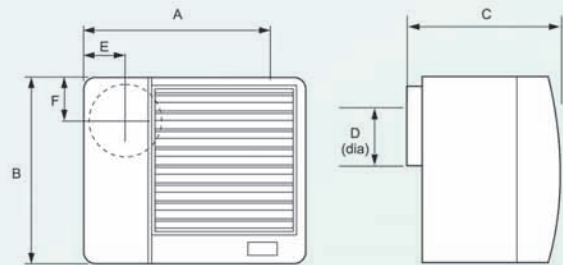

	A	B	C	D	E	F
C60 Series:	237	211	146	98	57	56

Features

- Spring loaded back draught shutter as standard.
- Casing in high quality technopolymer
- Hot running self lubricating motor with thermal cut off
- Dynamic crystal head humidistat sensor
- Adjustable timer and humidistat
- Anti-spike protection
- Optional wall fitting kit
- Optional grease filter
- 2 year guarantee

All measurements in mm.

Approvals

C. E. Marked

BEAB approved

KEYMARK approved

IPX4 Splashproof Rating (C25)


IPX2 Splashproof Rating (C60)

	Standard	Pullcord	Timer	Humidistat, Pullcord, Timer	Humidistat, Pullcord, Timer Max Extract 20 Litres	2 Speed, Humidistat, Timer	Low Voltage, Humidistat, Pullcord, Timer	Low Voltage, Pullcord, Timer	Low Voltage, Timer	2 Speed, Low Speed, Humidistat, Pullcord	2 Speed, Low Speed, Silent Running	2 Speed, Continuous Silent Running, Requires to be switched	2 Speed, Continuous Silent Running, Pullcord
Bathroom/WC Max Extract 90m³/h													
C25	✓												
C25 P		✓											
C25 T			✓										
C25 HPT				✓									
C25 H2P					✓								
C25 HPT /20						✓							
C25 LV							✓						
C25 PLV								✓					
C25 TLV									✓				
C25 HPTLV										✓			
C252 SRP												✓	
Kitchen Max Extract 220m³/h													
C60 P		✓											
C60 3P													✓
C60 HPT				✓									
C60 H2P /SR									✓				
C60 2SR										✓			
C60 2SRP											✓		

Dryflow 'S' Series



Dimensions

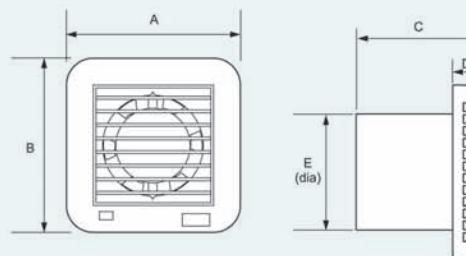

	A	B	C	D	E
S25 Series:	160	160	81	17	97
S50 Series:	180	180	101	18	119
S75 Series:	200	200	119	22	149

All measurements in mm.

Features

- Spring loaded back draught shutter as standard
- Casing in high quality technopolymer
- Hot running self lubricating motor with thermal cut off
- Slimline casing
- Dynamic crystal head humidistat sensor
- Adjustable timer and humidistat
- Anti-spike protection
- Optional wall fitting kit
- 2 year guarantee

Side View



The Dryflow 'S' series is a range of Slimline Axial Extract Fans for use in Kitchens, Bathrooms, Utility rooms and Cloak rooms. They are designed to be aesthetically superior and are virtually flush fitting. All models come complete with spring loaded back draught shutter, offer a range of options (see selection table) and are suitable for wall and ceiling applications.

Approvals

C.E. Marked

BEAB approved

KEYMARK approved

IPX4 Splashproof Rating

	Standard	Timer	Humidistat Timer
Bathroom/WC Max Extract 95m ³ /h			
S25	✓		
S25 T		✓	
S25 HT			✓
Utility Room Max Extract 165m ³ /h			
S50	✓		
S50 T		✓	
S50 HT			✓
Kitchen Max Extract 290m ³ /h			
S75	✓		
S75 T		✓	
S75 HT			✓