
CL2 TIME CONTROL

USER'S OPERATING INSTRUCTIONS



CL2 TIME CONTROL

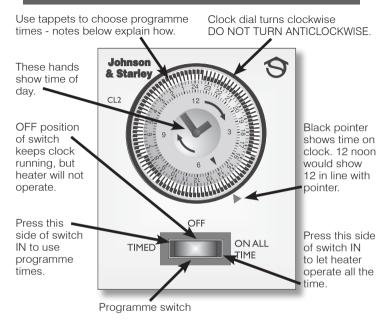

NOTE: The clock dial may differ from the old clock, but the method of setting is the same.

To set the time of day, grip the perimeter of the dial and turn the dial CLOCKWISE - **DO NOT** attempt to turn it anticlockwise.

The shortest time period that can be set is 15 minutes (this being a single tappet). The ON times are set by pushing the tappets IN towards the centre of the dial, the OFF times by pulling the tappets OUT.

To set ON and OFF periods for TIMED operation: EXAMPLE:-

The ON times wanted are 07.30 to 09.00 in the morning and 16.30 (4.30) to 23.15 (11.15) in the evening.

- PUSH IN all tappets between 7.30 and 09.00 and all tappets between 16.30 and 23.15 (OFF periods are represented by those tappets remaining OUT).
- Set the correct time of day by turning the dial CLOCKWISE until the actual time lines up with the pointer.
- iii) Set the switch to TIMED.
- iv) Set the Thermista-stat/room thermostat to the desired setting; the heater will now operate during the times required.

Other operating conditions:

- i) The heater(s) can be made to operate outside of the time control settings during any day (at weekends for example) by setting the appropriate switch to ON ALL TIME - the room and/or water temperatures will now be controlled automatically.
- To return to the usual ON and OFF times, or overnight, or during weekends, set the switch to TIMED.
- iii) If heating is not wanted, set the switch to the central OFF position.



Rhosili Road, Brackmills, Northampton NN4 7LZ
Main Switchboard Tel: 01604 762881 Fax: 01604 767408
Spares Tel: 01604 707012 Fax: 01604 764879
Service Tel: 01604 707011 Fax: 01604 707017
www.johnsonandstarley.co.uk