

terrier

Heating solutions



Pegler Yorkshire

Unrivalled quality, innovation, customer service and long-term value for money

As part of the global Aalberts Industries NV Group, Pegler Yorkshire is one of Britain's largest and most respected manufacturers of innovative products for the demanding and diverse plumbing and heating industries.

Pegler Yorkshire – a unique story

It was in the late 19th century when two separate and altruistic companies set out on the long road to satisfying the needs of prospective customers and, of course, to profit in the process. Coincidentally located just 30 miles apart, each was driven by the same vision and ideals of a no-compromise culture. Cutting corners was never an option and only the best could ever be good enough.

These two companies were Pegler and Yorkshire Fittings. In meeting all the challenges of the 20th and 21st centuries both companies have changed a great deal, the business ethos common to both never has. And now these two like minds have come together as Pegler Yorkshire – a single source of proven, flow control solutions for installers, specifiers and engineers in the domestic, public and commercial markets.

Reputable and established brands

Just as Pegler and Yorkshire have endured over such a long period, many of the brand names they have created over time are similarly very well established, in many cases as market leaders in their respective categories. The very extensive Pegler Yorkshire product range now comprises more than 15,000 lines – without rival for the choice and coverage it offers and for the number and scope of applications it satisfies.

A mind for innovation

Brands which endure and are not easily displaced must by definition be the product of innovative thinking and technology that continually stand the test of time. Pegler Yorkshire's no-compromise philosophy will always put new product development high on the agenda, based on not only meeting the needs of today's markets, but also anticipating and meeting customers' future needs.

The true value of knowledge

As well as the benefit of unparalleled experience of the flow control market and its growth over many decades, Pegler Yorkshire has strong associations with major industry bodies such as those responsible for determining product and performance standards.

The result is a comprehensive store of knowledge and reference which is invaluable in the key areas of research, development and dealing efficiently and accurately with customer enquiries – particularly with regard to product application and suitability.

A charter for the best in customer service

With such a diverse product range and customer base, Pegler Yorkshire's no-compromise standards of quality, reliability and value for money naturally go hand in hand with the principle of delivering the best in customer service.

Green awareness and responsibilities

Developing products which reduce the carbon footprint by saving water and energy is only one side of the green issues coin. Pegler Yorkshire is also increasingly committed to recycling key production materials (such as brass), eliminating the need for excessive packaging wherever possible, and looking for new ways in which the company's day-to-day operations can be improved to reduce waste and minimise the impact on the environment.

Likewise, social responsibilities such as supporting employee and local community welfare are aspects of the very fabric and philosophy upon which both Pegler and Yorkshire were founded.

Standards

Pegler Yorkshire is dedicated to designing, developing and manufacturing products of the highest quality. We are members of numerous standards committees and take an active part in their development. Our products, where applicable, comply with the relevant British, European and International standards. Whatever the latest developments, we guarantee that our products will always meet the latest and highest standards.



Trade bodies

Pegler Yorkshire is pleased to be associated with several influential industry organisations:



Association of Plumbing and Heating Contractors



The Bathroom Manufacturers Association



Construction Products Association

Brass

The Brass Page for specifiers, designers, engineers and manufacturers



British Plumbing Employers Council



Builders Merchants Federation



The Copper Development Association



The UK Copper Board



Institute of Plumbing



Heating and Ventilating Contractors Association




Thermostatic Mixing Valve Manufacturers Association

Thermostatic Mixing Valve Manufacturers Association



Scottish and Northern Ireland Plumbing Employers Federation

 This data book has been produced in clearly defined sections to help the user to find relevant information quickly and easily. At the foot of each page there is a reminder of the brochure sections with the relevant page numbers.

Section 1

Range overview

| | |
|-------------------------------------|-------|
| The complete range | 4-5 |
| Product overview | 6-12 |
| Standards, approvals and guarantees | 13-14 |

Section 2

Product details

| | |
|---|-------|
| Thermostatic radiator valves | 15-20 |
| Manual radiator valves | 21-26 |
| All chrome decorative radiator valves | 27-30 |
| Heating controls | 31-34 |
| Differential pressure bypass valves and circulation pumps | 35-36 |
| Commercial manual and thermostatic radiator valves | 37-42 |

Section 3

Technical data

| | |
|---|-------|
| Applications | 42-44 |
| Product and tube compatibility and application | 45 |
| System design considerations and installation best practice | 46-47 |

Section 4

Flow rates

| | |
|---|-------|
| Performance - pressure/temperature ratings and flow rates | 48-53 |
|---|-------|

Section 5

Care and maintenance 54-55



terrier

Heating solutions The complete range

Out of Pegler Yorkshire's great traditions has come the unrivalled Terrier range of heating controls, radiator valves, circulating pumps and accessories.

Pegler Yorkshire heating products – the complete range

The Pegler Yorkshire heating package is continually developing and evolving to provide ever better and more cost-effective solutions to customers' needs.

- Terrier heating controls, radiator valves, circulating pumps and accessories are designed principally for the domestic market but they are also suitable for light commercial applications such as healthcare centres and offices



- The Terrier range comprises stylish, state-of-the-art heating controls including manual and thermostatic valves for 8, 10 and 15mm pipe sizes plus 1/2" iron connection for iron or steel pipe light commercial systems.

Terrier heating solutions benefits

Pick up any item from the Terrier heating range and the superior quality and extra features are immediately apparent.

- Attractive styling
- Thoughtful and flexible design
- Clear control markings
- Quiet operation
- Easy installation and maintenance.



Terrier service

As with all Pegler Yorkshire products, the Terrier range is supported by outstanding customer service.

- Friendly and helpful telephone response
- Computerised sales ordering and distribution
- Full installation instructions with every Terrier product
- All the technical support and advice you could need from Pegler Yorkshire's expert team and dedicated helpline.



Terrier quality and pedigree

Terrier radiator valves have long been the most trusted and respected in the industry for quality, design, reliability and overall value for money – attributes to be found in every product in the comprehensive Terrier heating range.

- Robust construction under the most stringent quality control conditions assures a long working life
- Pegler Yorkshire investment in advanced manufacturing techniques to complement the traditional skills of the workforce has achieved BS EN ISO 9002 (BS 5750) accreditation

- Where appropriate there is compliance with kitemark British Standards or the European norm (BS 2767-10, EN 215), with independent testing and certification
- Every Terrier product is made to perform better and to last longer – by any standards, the one true measure of value for money.



Thermostatic radiator valves

Terrier thermostatic radiator valves are manufactured to exacting standards by Pegler Yorkshire to ensure reliability.

Terrier TRVs are an immediate step towards making heating systems energy efficient. With its accuracy in temperature setting and response Terrier TRV will close when heat is not required. Connection flexibility is available with compression, compression push-fit and integral push-fit options.

Features

- *Bi-directional flow for installation flexibility*
- *Double 'O' ring seal for enhanced reliability*
- *Clear temperature settings for the visually impaired*
- *Available in compression, adaptor and integral push-fit to suit a variety of pipe*
- *Approved to EN 215, ensuring low hysteresis*
- *Push-fit straight and elbow connectors available*
- *Temperature flexibility from 0°C - 28°C settings*
- *Low hysteresis, ensuring rapid response to temperatures*
- *Economy settings for maximum energy efficiency*
- *Improved nominal flow rates for both bi-direction applications.*



Push-fit two-way thermostatic radiator valves

Speed of installation has been a key consideration and push-fit technology means many fitting complications are removed, greatly saving installation time on site and resulting in significant cost savings. The "push" element of jointing new Terrier Push-fit is instantaneous and the simple, tool-free jointing action requires no secondary operations in awkward areas, which means there is much less chance of damaging chrome pipe as a result.

Features

- *Bi-directional flow capability*
- *Frost protection 7°C*
- *Setting range 7°C - 28°C*
- *Approved to EN 215*
- *Suitable for 2 pipe systems*
- *Polished chrome plate finish*
- *Double 'O' ring seal*
- *Low hysteresis wax sensor*
- *'0' setting for positive shut off*
- *Improved nominal flow rate for both forward and reverse applications.*



Manual radiator valves

Manual radiator valves for small bore and micro bore heating systems, including combis. Available in wheel handle for manual flow adjustment, lockshield for system balancing purposes and drainoff version for convenience when draining down your radiator. Connection flexibility is available with compression, compression push-fit adaptors and integral push-fit options.

Features

- Long life gland packing with rising spindle for extended reliability
- Available in compression, push-fit adaptor and integral push-fit, suiting a variety of pipe
- Screw down handles for anti-tamper and safety
- Approved to BS 2767-10, ensuring water working pressure up to 10bar (non shock)
- Push-fit straight and elbow connectors available.



Push-fit manual radiator valves

The new Terrier Push-fit range has been developed using the wealth of knowledge of push-fit fittings and heating controls technology Pegler Yorkshire has built up over many years to deliver an integrated push-fit radiator product that truly offers the best of both worlds. Designed to meet the requirements of the new build sector, Terrier Push-fit successfully combines product quality and speed of installation, whilst being competitively priced.

Features

- Suitable for sealed systems
- Water working pressure up to 10bar (non-shock)
- Approved to BS 2767-10
- White handles as standard
- Screw down lockshield
- Superior grip characteristics on wheel handle
- Comprehensive range of WH, LS and DLS
- Long life gland packing with rising spindle
- Gland removal without draining down.



Decorative thermostatic radiator valves

The all chrome Terrier thermostatic radiator valve ensures aesthetic appeal whilst maintaining quality and reliability. Decorative valves are not exclusive to bathrooms and are increasingly used in living areas. Terrier thermostatic radiator valves provide energy efficient operation as well as aesthetic appeal. Connection flexibility is available with the option of compression and compression push-fit valves.

Features

- *Bi-directional flow for installation flexibility*
- *Double 'O' ring seal for enhanced reliability*
- *Clear temperature settings for the visually impaired*
- *Available in compression and push-fit adaptor to suit a variety of pipe*
- *Approved to EN 215, ensuring low hysteresis*
- *Push-fit straight and elbow connectors available.*



Decorative manual radiator valves

The latest offering from Terrier combines quality and a choice of styles to suit a range of traditional and modern radiator types. The Terrier manual radiator valve selection includes all chrome and decorative radiator valves. All Terrier manual radiator valves are available in angle and straight pattern bodies allowing complete flexibility when aligning against pipe or radiator.

Features

- *Comprehensive range of WH and LS*
- *Approved to BS 2767-10, ensuring durability and endurance*
- *Push-fit straight and elbow connectors available*
- *Double 'O' ring seal for long life*
- *Designed to complement decorative TRVs*
- *Styles include ultra modern, minimalist, cross top modern and traditional*
- *Approved to BS 2767-10, ensuring durability and endurance*
- *Angle and straight pattern bodies available for alignment options*
- *Identical WH and operating LS.*



Electronic and electro-mechanical programmers

Easy to install and easy to use, these very reliable Terrier programmers are designed to blend in with any room setting.

Simple to set up, both programmers have versatile settings with up to 3 timed periods per day for each day of the week (for both hot water and heating in the two-channel programmer) and the option of ADVANCE and BOOST features. These give users the flexibility to vary their timed periods to suit individual needs.

Another very practical feature of both programmers is an industry-standard 6-pin backplate. This makes it a simple matter to fit either from new or when replacing a similar existing model.

Features

Electronic

- Choice of single, two and three channel models
- Up to 3 ON/OFF periods per day
- Choice of 'TIMED', 'ALL DAY' or 'CONTINUOUS' settings for each day
- 'COPY' button facility
- Large, easy-to-read LCD display
- Advance button – 1, 2 or 3 hours
- Independent timing for heating and hot water (TP2 and TP3 models) meets Part L1 of the Building Regulations.

Electro-mechanical

- Choice of single and two channel models
- Choice of permanent ON/OFF, ON all day or ON/OFF twice a day
- Single channel model suitable for Combi boiler and heating only systems
- Two channel model suitable for pumped and gravity hot water systems
- Single element heating control on single channel model.



Thermostats

Elegantly styled, Terrier room thermostats ensure accurate temperature control. The tried and tested thermostatic mechanism, which is quiet in operation, can replace older thermostats by using a 2-wire as well as a modern 3-wire connection.

Highly recommended where there is exposed water-filled system pipework or components, Terrier frost thermostats require only a 2-wire connection and automatically operate the pump and boiler to prevent freezing up or to provide background heating even if other system controls are not calling for heat.

Terrier cylinder thermostats maintain the temperature of stored water at a safe level, but are adjustable where higher temperatures are required. Secured by means of the nylon strap provided, they fit in cylinders which have a standard 25mm foam insulation layer. Of robust construction, they have a wide temperature differential to prevent unnecessary boiler cycling.

Features

Room thermostat

- 5°C to 30°C operating range
- Temperature differential 0.4°C with built-in accelerator heater (0.6°C disconnected)
- Can be connected in place of older two-wire thermostats
- Range limiting stops
- Large easy-grip dials.

Frost thermostat

- 5°C to 10°C operating range
- Temperature differential 0.6°C with built-in accelerator heater
- Simple two-wire connection
- Concealed operating knob with tool access
- Tamper resistant.

Cylinder thermostat

- 30°C to 90°C range covers low and high temperature water storage applications
- 5°C to 10°C temperature differential prevents boiler cycling
- Large easy-grip dial with easy to read temperature markings.



Zone valves

The heart of a modern heating controls system, Terrier motorised valves are extremely robust, reliable, quiet in operation and interchangeable with other makes. Available in 22mm and 28mm compression fitting and 3/4" and 1" female iron sizes, and 2-port zone valve and 3-port mid-position valves, they cater for the widest possible range of applications for domestic and light commercial premises.

For easy maintenance the actuator can be removed separately without draining the system down, and superior Terrier construction ensures durability in the cylinder cupboard location. Both zone and mid-position valves have built-in self-cleaning shoes for maximum working life.

Features

- Choice of two- and three-port valves
- 22mm or 28mm copper compression connections and 3/4" and 1" female iron connections
- Suitable for replacing most existing valve bodies or for new applications
- Removable actuator with 1 metre flex
- Easy to change without draining down the system
- Spring return actuator action with built-in interlock auxiliary switch
- Meets Part L1 of the Building Regulations.



Control packs

The Terrier Control Pack incorporates all the elements required for central heating and hot water control in one box. For individual room temperature control we recommend Terrier thermostatic and manual radiator valves.

The Terrier control packs come complete with instructions for installing the individual controls and then all together to make installation as easy as possible.

For further advice on Terrier heating control packs or for their application, please contact our Technical Service Team on 0870 1200285. For product specification please refer to relevant page.

Features

Zone control packs

- 22mm and 28mm copper compression connections
- Includes two channel electronic programmer and room and cylinder thermostats.

Mid-position control packs

- 22mm and 28mm copper compression connections
- Includes two channel electronic programmer and room and cylinder thermostat
- 22mm copper compression connections pack available with electro-mechanical and room and cylinder thermostats.

Combi control packs

- Single channel electro-mechanical programmer and room thermostat.



Automatic bypass valves

Prevents unnecessary increases in circulating pressure when thermostatic or motorised valves close, leading to system or valve noise. Also allows water flow for pump overrun in place of a fixed bypass only when required.

Features

- Small proportional deviation
- Maximum response accuracy due to calibrated high tensile spring
- Low friction
- Directly readable adjustment
- Excellent flow characteristics
- Gunmetal
- Setting range 50 - 500 mbar
- Maximum operating temperature 100°C
- Minimum operating temperature 1°C
- Maximum operating pressure 6bar.



Domestic circulating pumps

Suitable for indirect open-vented or sealed domestic heating and hot water systems. Designed for quiet operation with three speed settings for maximum flexibility when commissioning. Low power consumption. Approved to BS EN 60335 & BS EN 1151 and Kitemarked.

Features

- Mains supply 230v 50Hz
- Maximum head TC5 - 5M, TC6 - 6M
- Maximum pressure 10.0bar
- Minimum pressure 0.15bar
- System water temperature
Minimum 5°C, maximum 110°C
- Maximum ambient temperature 35°C
- Pipe connections 1½" BSPM
- Weight 2.6 kg
- Test pressure 24bar/30°C
- Maximum working pressure PN16 (16bar)
- Maximum operating temperature 120°C.



Thermostatic radiator valves

Belmont thermostatic radiator valves have been designed for use on commercial through to residential properties including combi boiler installations.

The Belmont TRV benefits from a frost setting where the valve is opened automatically at 7°C to prevent the system freezing and has a built-in patented tamper-resistant feature that is key operated. The TRV also employs a patented 'lift and lock' operation which prevents accidental adjustment.

Features

- Control range of 11°C - 29°C
- Frost setting at 7°C
- Positive shut off for maintenance purposes
- Range limiting locking customised temperature setting
- Approved to EN 215
- Suits copper and iron pipework*
- Matching manual radiator valves
- 10bar rating suitable for combi boilers
- Horizontal and vertical mounting
- Patented unique lift and lock tamper-resistant mechanism.



Manual radiator valves

The new manual radiator valve range offers both traditional handwheel and lockshield styles, along with a new concealed lockshield style in both angled and straight patterns.

A 'no drain solution' on manual valves allows the spindle 'O' ring's seal to be changed with the system still full of water. The whole head-work may be changed without draining by using a gland removal tool. These features minimise down time, saving both cost and time on site.

Innovations introduced for the first time include a concealed lockshield cap on the manual radiator valve, which requires an allen key to adjust the flow. The lockshield provides tamper resistance, this prevents accidental or vandal adjustment in public areas and ensures protection for system balance.

Features

- Suits a wide range of commercial applications
- Valves can be serviced without draining the system
- Approved to BS 2767-10
- Concealed lockshield with allen key adjustment
- Compression or iron end connection direct.*



*Pegler Yorkshire has a range of push and press connectors in the Tectite range for use with plastic, carbon steel or copper piping.

Thermostatic valve bodies

Belmont thermostatic radiator valves comprise three different body patterns: angle, horizontal and straight. They have a choice of pre-setting and non pre-setting options.

Chrome plated bodies offered as standard, all bodies ensure reverse flow technology and removable glands for future ease of maintenance.

Features

- Approved to EN 215
- Suits copper and iron pipework direct*
- 10bar rating suitable for combi boilers
- Horizontal and vertical mounting
- Insert removal and replacement without draining down when using special tool
- All valves are suitable for 2 pipe systems.



*Pegler Yorkshire has a range of push and press connectors in the Tectite range for use with plastic, carbon steel or copper piping.

Thermostatic heads

Choice of different thermal heads are available: standard, remote sensing with 2m/8m capillary and remote adjusting in 2m, 5m and 8m capillary lengths. The patented thermal head has a unique head mechanism which operates in standard or lockdown mode, this takes out the requirement for a separate robust head. This makes the Belmont solution the first choice for those looking for the benefits of the latest products and service in a cost-effective package.

Features

- Suitable for sealed systems
- Water working pressure up to 10bar (non-shock)
- Approved to EN 215
- White handles as standard
- Screw down lockshield
- Superior grip characteristics on wheel handle
- Comprehensive range of WH, LS and DLS
- Long life gland packing with rising spindle
- Gland removal without draining down.



It is Pegler Yorkshire policy to provide a range of products and services which meet, or exceed, the requirements of our customers in respect of quality, cost and delivery.

Standards and approvals

Terrier products are manufactured under quality systems in accordance with EN 29002/ISO 9002 and meet the following British and European standards.

BS 2767-10

Specification for manually operated copper alloy valves for radiators.

BS EN 215:2004

Thermostatic radiator valves. Requirements and test methods.

BS EN 1254-2:1998

Copper and copper alloys. Plumbing fittings. Fittings with compression ends for use with copper tube.

BS EN 1254-3:1998

Copper and copper alloys. Plumbing fittings. Fittings with compression ends for use with plastic pipes.

pr EN 1254-6 (draft)

Copper and copper alloys. Plumbing fittings – Part 6: Fittings with push-fit ends.

BS EN 60335-2-41:2003

Household and similar electrical appliances. Particular requirements for pumps.

BS EN 1151-1:2006

Pumps. Rotodynamic pumps. Circulation pumps having a rated power input not exceeding 200W for heating installations and domestic hot water installations. Non-automatic circulation pumps, requirements, testing, marking.



ISO is achieved through the continuous improvement of our Quality Management System in line with the requirements of BS EN ISO 9001: 2000.




















Guarantees

Where Terrier products are installed and used in accordance with the installation instructions the following guarantees will apply:

| | GUARANTEES | |
|------------------------------|--------------------------|---|
| | Guarantee period (years) | |
| | 2 | 5 |
| Manual radiator valves | – | ✓ |
| Thermostatic radiator valves | – | ✓ |
| Compression ends | – | – |
| Push-fit ends | – | – |
| Domestic circulating pumps | ✓ | – |
| Controls | ✓ | – |
| Automatic bypass valves | ✓ | – |

| STANDARDS AND APPROVALS | | | |
|----------------------------------|--|---|---|
| Product | Standards | Approvals | Compliant |
| All manual radiator valves | BS 2767-10 <ul style="list-style-type: none"> Covers pressure testing Size, strength Pressure rating ISO 228 ISO 7 thread standards Up to 10bar pressure | <ul style="list-style-type: none"> Official BSI (British Standard Institute) Product marked | |
| All thermostatic radiator valves | BS EN215: 2004 – Thermostatic <ul style="list-style-type: none"> Performance (hysteresis) Dimensions, strength Pressure rating ISO 228 ISO 7 thread standards Up to 10bar pressure | <ul style="list-style-type: none"> BSI, audited by independent testing body CEN mark fully approved, marking on product | <ul style="list-style-type: none"> Building Regulations Part L |
| All compression ends | BS 1254 compression ends <ul style="list-style-type: none"> Strength Pressure testing | <ul style="list-style-type: none"> Kitemark product | |
| All push-fit ends | pr EN 1254-6 <ul style="list-style-type: none"> Strength Pressure testing | | |
| Domestic circulating pumps | BS EN 60335-2-41: 2003 <ul style="list-style-type: none"> Safety of household electrical appliance BS EN 1151-1:2006 <ul style="list-style-type: none"> Testing requirement Mechanical Performance | <ul style="list-style-type: none"> Kitemark product CE Marked | |
| Controls | IP Ratings Ingress Protection <ul style="list-style-type: none"> Sealing effectiveness of enclosures of electrical equipment Protects against the intrusion (i.e. tools, dust, fingers) and moisture. Building Regulations Part L | <ul style="list-style-type: none"> CE marked | <ul style="list-style-type: none"> Building Regulations Part L (2 channel) |
| Automatic bypass valves | | | <ul style="list-style-type: none"> Building Regulations Part L |


Recommended applications

| RECOMMENDED APPLICATIONS | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|--|--|--|---|--|--|---|---|--|--|--|---|---|---|---|
| |  Schools and nurseries |  Senior schools and universities |  Hospitals |  Hospital public areas |  Care centres |  Domestic |  Office |  Factories |  Hotels |  Hotel public areas |  Leisure |  Public utilities |  Energy savings |  Tamper proof |  Social housing |  New build |  DIY |  Time adjustment |  Flow adjustment |
| Terrier TRV | | | | | | ✓ | ✓ | | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| Terrier TRV & push-fit | | | | | | ✓ | ✓ | | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| Terrier TRV with integral push-fit | | | | | | ✓ | ✓ | | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| Terrier manual radiator valves | | | | | | ✓ | ✓ | | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | | |
| Terrier manual radiator valves & push-fit | | | | | | ✓ | ✓ | | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | | |
| Terrier manual radiator valves with integral push-fit | | | | | | ✓ | ✓ | | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | | |
| Terrier chrome plated TRV | | | | | | ✓ | | | ✓ | ✓ | | | ✓ | | | ✓ | ✓ | | ✓ |
| Terrier chrome plated TRV & push-fit | | | | | | ✓ | | | ✓ | ✓ | | | ✓ | | | ✓ | ✓ | | ✓ |
| Terrier chrome plated manual radiator valves | | | | | | ✓ | | | ✓ | ✓ | | | ✓ | | | ✓ | ✓ | | ✓ |
| Terrier chrome plated decorative manual radiator valves | | | | | | ✓ | | | ✓ | ✓ | | | | | | ✓ | ✓ | | |
| Terrier programmers | | | | | | ✓ | | | | | | | ✓ | | ✓ | ✓ | ✓ | ✓ | |
| Terrier controls | | | | | | ✓ | | | | | | | ✓ | | ✓ | ✓ | ✓ | | |
| Terrier motorised valves | | | | | | ✓ | | | | | | | | | ✓ | ✓ | ✓ | | |
| Terrier control packs | | | | | | ✓ | | | | | | | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ |
| Terrier ABV | | | | | | ✓ | | | | | | | | | ✓ | ✓ | ✓ | | |
| Terrier pumps | | | | | | ✓ | | | | | | | | | ✓ | ✓ | ✓ | | |
| Terrier pump valves | | | | | | ✓ | | | | | | | | | ✓ | ✓ | ✓ | | |
| Terrier Ventair | | | | | | ✓ | | | | | | | | | ✓ | ✓ | ✓ | | |
| Belmont TRV | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | ✓ |
| Belmont manual radiator valves | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | | | ✓ | | | | |
| Belmont locking manual radiator valves | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | | |
| Belmont bodies | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | | ✓ |
| Belmont heads | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | | |
| Belmont remote sensors | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | | |
| Belmont remote adjusters | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | | |


Thermostatic radiator valves

Thermostatic radiator valves & packs to EN215


| TRV angle vertical or horizontal mounting | | | | | | |
|---|-----------------|----|-----|----|----------|------------|
| Size | Finish | A | B | C | Quantity | Order code |
| 8mm x 1/2" | Chromium plated | 61 | 130 | 26 | 10 | 632001 |
| 10mm x 1/2" | Chromium plated | 61 | 130 | 26 | 10 | 632002 |
| 15mm x 1/2" | Chromium plated | 61 | 130 | 26 | 10 | 632003 |

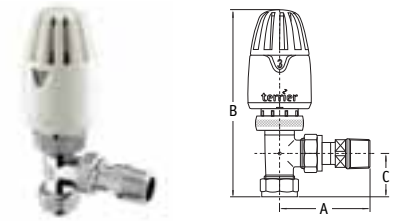

| TRV straight body, vertical head 2 way | | | | | | |
|--|-----------------|------|----|-----|----------|------------|
| Size | Finish | A | B | C | Quantity | Order code |
| 8/10mm x 1/2" | Chromium plated | 33.5 | 69 | 109 | 10 | 632102 |
| 15mm x 1/2" | Chromium plated | 36 | 69 | 109 | 10 | 632103 |

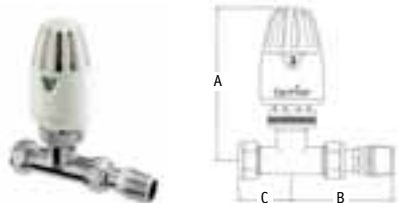


| TRV angled with 367 CPLS matching lockshield | | | | | | |
|--|-----------------|----|----|----|----------|------------|
| Size | Finish | A | B | C | Quantity | Order code |
| 8mm x 1/2" | Chromium plated | 62 | 52 | 26 | 10 | 632011 |
| 10mm x 1/2" | Chromium plated | 62 | 52 | 29 | 10 | 632012 |
| 15mm x 1/2" | Chromium plated | 62 | 52 | 29 | 10 | 632013 |

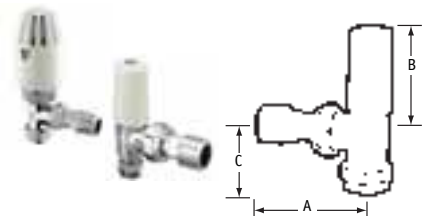


* See TRV for dimensions

| TRV angled with 367 CPDLS matching drain off lockshield | | | | | | |
|---|-----------------|----|----|----|----------|------------|
| Size | Finish | A | B | C | Quantity | Order code |
| 8mm x 1/2" | Chromium plated | 77 | 52 | 26 | 10 | 632021 |
| 10mm x 1/2" | Chromium plated | 77 | 52 | 29 | 10 | 632022 |
| 15mm x 1/2" | Chromium plated | 77 | 52 | 29 | 10 | 632023 |

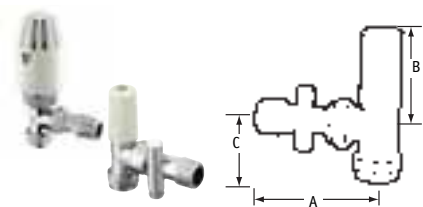

* See TRV for dimensions


Thermostatic radiator valves

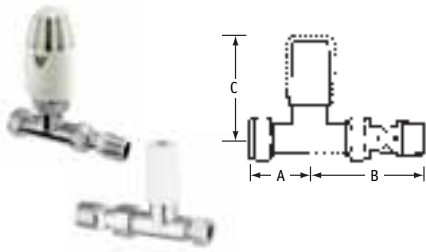

TRV straight body 2 way, vertical head with 368T CPLS matching lockshield

| Size | Finish | A | B | C | Quantity | Order code |
|---------------|-----------------|------|----|----|----------|------------|
| 8/10mm x 1/2" | Chromium plated | 33.5 | 69 | 61 | 10 | 632112 |
| 15mm x 1/2" | Chromium plated | 36 | 69 | 61 | 10 | 632113 |

* See TRV for dimensions

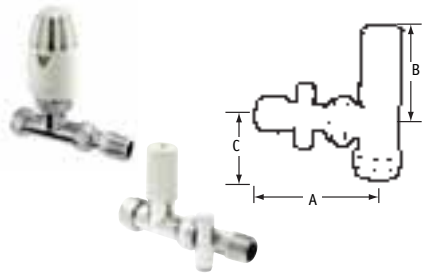

TRV straight body 2 way, vertical head with 368T CPDLS matching lockshield

| Size | Finish | A | B | C | Quantity | Order code |
|---------------|-----------------|----|----|-------|----------|------------|
| 8/10mm x 1/2" | Chromium plated | 77 | 52 | 26/29 | 10 | 632122 |
| 15mm x 1/2" | Chromium plated | 77 | 52 | 29 | 10 | 632123 |


* See TRV for dimensions



Extension tail piece ETP 40mm (supplied with nut and olive)

| Size | Finish | A | Quantity | Order code |
|---------------|-----------------|----|----------|------------|
| For all sizes | Brass | 40 | 10 | 634005 |
| For all sizes | Chromium plated | 40 | 10 | 634006 |

Push-fit thermostatic radiator valves to EN 215

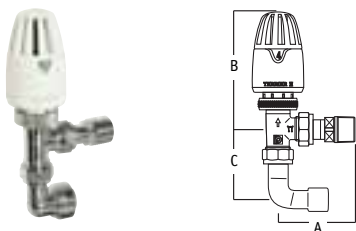


TRV angle pattern compression with push-fit elbow connector

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|---------------|----|-----|----|----------|------------|
| 10mm x 1/2" | Chrome plated | 81 | 104 | 46 | 10 | 662001 |
| 15mm x 1/2" | Chrome plated | 90 | 104 | 55 | 10 | 662002 |


TRV angle pattern vertical or horizontal mounting compression with push-fit straight connector

| Size | Finish | A | B | Quantity | Order code |
|-------------|---------------|----|-----|----------|------------|
| 10mm x 1/2" | Chrome plated | 61 | 144 | 10 | 662003 |
| 15mm x 1/2" | Chrome plated | 61 | 159 | 10 | 662004 |




TRV PF angle pattern vertical or horizontal mounting integral push-fit connection

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|-----|----|----------|------------|
| 1/2" x 10mm | Chromium plated | 60 | 133 | 35 | 1 | 662203 |
| 1/2" x 15mm | Chromium plated | 60 | 133 | 35 | 1 | 662204 |



TRV PF angle pattern vertical or horizontal mounting integral push-fit connection with push-fit elbow connector


| Size | Finish | A | B | C | D | E | Quantity | Order code |
|--------------------------------|-----------------|----|-----|----|----|----|----------|------------|
| 1/2" x 15mm with 10mm elbow | Chromium plated | 60 | 133 | 35 | 50 | 27 | 1 | 662201 |
| 1/2" x 15mm with 15mm elbow | Chromium plated | 60 | 133 | 35 | 53 | 33 | 1 | 662202 |




TRV with 367 CPLS matching lockshield

compression angle pattern TRV with push-fit elbow connectors

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 82 | 49 | 52 | 10 + 10 | 662005 |
| 15mm x 1/2" | Chromium plated | 91 | 58 | 52 | 10 + 10 | 662006 |




Thermostatic radiator valves



TRV with 367 CPLS matching lockshield

compression angle pattern TRV with push-fit straight connectors


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 62 | 43 | 52 | 10 + 10 | 662007 |
| 15mm x 1/2" | Chromium plated | 62 | 58 | 52 | 10 + 10 | 662008 |



TRV with 367 CPDLS matching drain off lockshield

compression angle pattern TRV with push-fit elbow connectors


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|-----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 97 | 49 | 52 | 10 + 10 | 662009 |
| 15mm x 1/2" | Chromium plated | 106 | 58 | 52 | 10 + 10 | 662010 |



TRV with 367 CPDLS matching drain off lockshield

compression angle pattern TRV with push-fit straight connectors

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 77 | 43 | 52 | 10 + 10 | 662011 |
| 15mm x 1/2" | Chromium plated | 77 | 58 | 52 | 10 + 10 | 662012 |




TRV PF & 367PF CPLS lockshield pack

integral push-fit connection


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 1/2" x 10mm | Chromium plated | 60 | 87 | 35 | 1 | 662205 |

TRV PF & 367PF CPLS lockshield pack*integral push-fit connection with push-fit elbow connectors*

| Size | Finish | A | B | C | D | E | Quantity | Order code |
|---------------------------------|--------------------|----|----|----|----|----|----------|------------|
| 1/2" x 15mm with 10mm elbows | Chromium plated | 60 | 87 | 35 | 50 | 27 | 1 | 662206 |

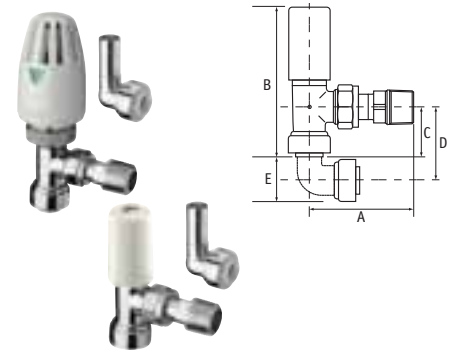**TRV PF & 367PF CPDLS drainable lockshield pack***integral push-fit connection with push-fit elbow connectors*


| Size | Finish | A | B | C | D | E | Quantity | Order code |
|---------------------------------|--------------------|----|----|----|----|----|----------|------------|
| 1/2" x 15mm with 10mm elbows | Chromium plated | 77 | 87 | 35 | 50 | 27 | 1 | 662207 |

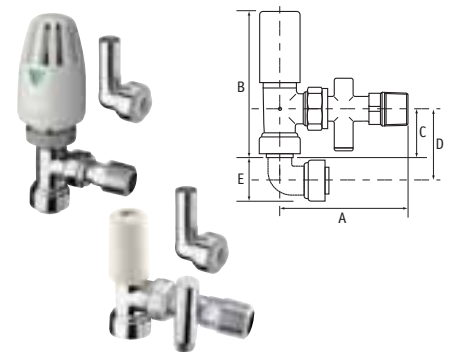


Push-fit connectors

Push-fit elbow

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|---------------|----|----|----|----------|------------|
| 15mm x 10mm | Chrome plated | 23 | 25 | 40 | 20 | 7P1010 |
| 15mm | Chrome plated | 28 | 26 | 42 | 20 | 7P1012 |

**Push-fit straight connector**

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|---------------|------|----|----|----------|------------|
| 15mm x 10mm | Chrome plated | 22.5 | 23 | 23 | 20 | 7P1011 |
| 15mm | Chrome plated | 27.5 | 30 | 23 | 20 | 7P1013 |



Thermostatic radiator valves

Push-fit accessories



Release tool

| Size | Quantity | Order code |
|------|----------|------------|
| 10mm | 5 | 7P1014 |
| 15mm | 5 | 7P1015 |

Push-fit collet clips

| Size | Quantity | Order code |
|------|----------|------------|
| 10mm | 100 | 661101 |
| 15mm | 100 | 661102 |

T110 multipurpose tool *deburring/depth gauge/scribe*


| Size | Quantity | Order code |
|----------|----------|------------|
| one size | 1 | 7P1016 |

Manual radiator valves

Manual radiator valves to BS 2767-10


367 WH Angle pattern - for copper

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|--------|----|----|----|----------|------------|
| 8mm x 1/2" | Brass | 62 | 54 | 26 | 10 | 601002 |
| 10mm x 1/2" | Brass | 62 | 54 | 29 | 10 | 601006 |
| 15mm x 1/2" | Brass | 62 | 54 | 29 | 10 | 601008 |

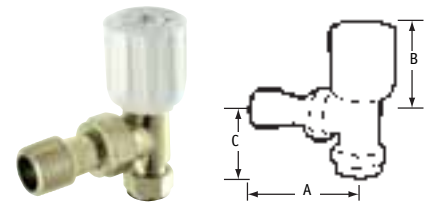


367 LS Angle pattern - for copper

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|--------|----|----|----|----------|------------|
| 8mm x 1/2" | Brass | 62 | 52 | 26 | 10 | 601012 |
| 10mm x 1/2" | Brass | 62 | 52 | 29 | 10 | 601016 |
| 15mm x 1/2" | Brass | 62 | 52 | 29 | 10 | 601018 |

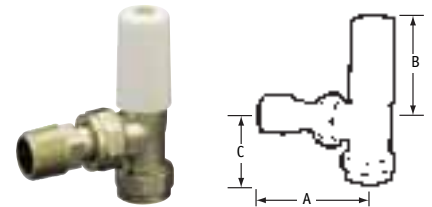


367 CPWH Angle pattern - for copper

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 8mm x 1/2" | Chromium plated | 62 | 54 | 26 | 10 | 601022 |
| 10mm x 1/2" | Chromium plated | 62 | 54 | 29 | 10 | 601026 |
| 15mm x 1/2" | Chromium plated | 62 | 54 | 29 | 10 | 601028 |

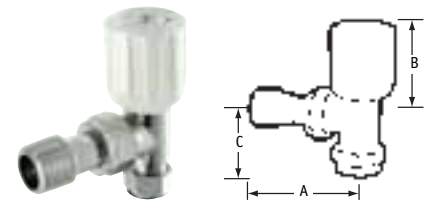


367 CPLS Angle pattern - for copper

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 8mm x 1/2" | Chromium plated | 62 | 52 | 26 | 10 | 601032 |
| 10mm x 1/2" | Chromium plated | 62 | 52 | 29 | 10 | 601036 |
| 15mm x 1/2" | Chromium plated | 62 | 52 | 29 | 10 | 601038 |

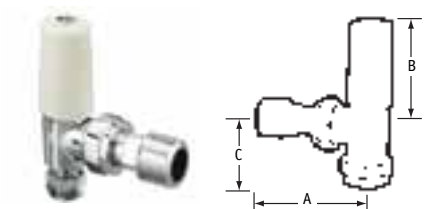


367 DLS Angle pattern with drain off - for copper

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|--------|----|----|----|----------|------------|
| 8mm x 1/2" | Brass | 77 | 52 | 26 | 10 | 601042 |
| 10mm x 1/2" | Brass | 77 | 52 | 29 | 10 | 601046 |
| 15mm x 1/2" | Brass | 77 | 52 | 29 | 10 | 601048 |

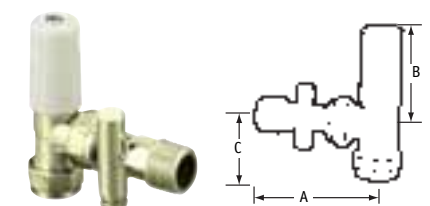


Manual radiator valves

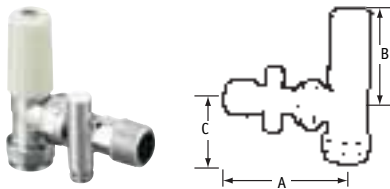


367 CPDLS Angle pattern with drain off - for copper

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 8mm x 1/2" | Chromium plated | 77 | 52 | 26 | 10 | 601052 |
| 10mm x 1/2" | Chromium plated | 77 | 52 | 29 | 10 | 601056 |
| 15mm x 1/2" | Chromium plated | 77 | 52 | 29 | 10 | 601058 |

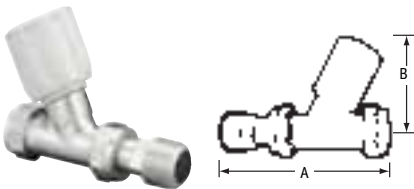


368 CPWH Straight pattern - for copper

| Size | Finish | A | B | Quantity | Order code |
|-------------|-----------------|----|----|----------|------------|
| 15mm x 1/2" | Chromium plated | 98 | 64 | 10 | 602028 |

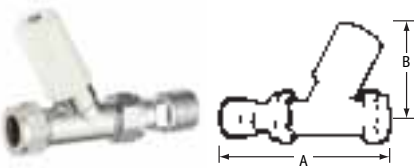


368 CPLS Straight pattern - for copper

| Size | Finish | A | B | Quantity | Order code |
|-------------|-----------------|----|----|----------|------------|
| 15mm x 1/2" | Chromium plated | 98 | 60 | 10 | 602038 |

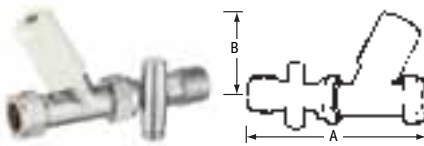


368 CPDLS Straight pattern with drain off - for copper

| Size | Finish | A | B | Quantity | Order code |
|-------------|-----------------|-----|----|----------|------------|
| 15mm x 1/2" | Chromium plated | 113 | 64 | 10 | 602048 |

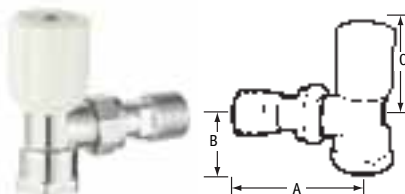

369 CPWH Angle pattern - for iron

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 1/2" x 1/2" | Chromium plated | 65 | 25 | 54 | 10 | 603028 |

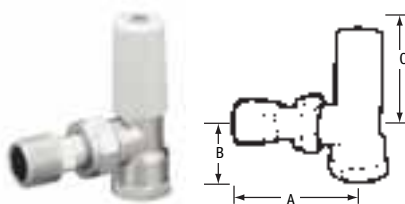


369 CPLS Angle pattern - for iron


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 1/2" x 1/2" | Chromium plated | 65 | 25 | 52 | 10 | 603038 |

368T CPWH Straight pattern - for copper


| Size | Finish | A | B | C | Quantity | Order code |
|---------------|-----------------|------|----|----|----------|------------|
| 8/10mm x 1/2" | Chromium plated | 33.5 | 77 | 61 | 10 | 602127 |
| 15mm x 1/2" | Chromium plated | 36 | 77 | 61 | 10 | 602128 |

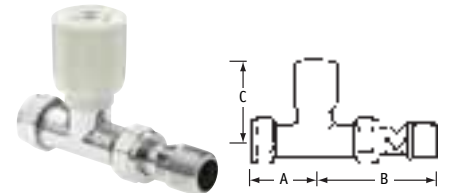**368T CPLS Straight pattern - for copper**


| Size | Finish | A | B | C | Quantity | Order code |
|---------------|-----------------|----|----|----|----------|------------|
| 8/10mm x 1/2" | Chromium plated | 34 | 69 | 61 | 10 | 602137 |
| 15mm x 1/2" | Chromium plated | 36 | 69 | 61 | 10 | 602138 |

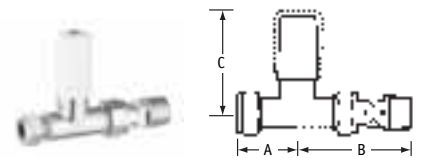**368T CPDLS Straight pattern - for copper**


| Size | Finish | A | B | C | Quantity | Order code |
|---------------|-----------------|------|----|----|----------|------------|
| 8/10mm x 1/2" | Chromium plated | 33.5 | 77 | 61 | 10 | 602147 |
| 15mm x 1/2" | Chromium plated | 36 | 77 | 61 | 10 | 602148 |

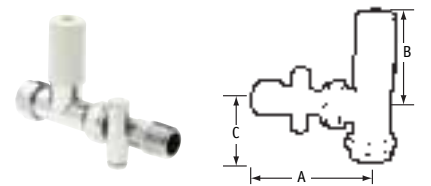**Push-fit manual radiator valves to BS 2767-10****367 CPWH Angle pattern***compression connection with push-fit elbow connector*


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 82 | 49 | 54 | 10 | 661001 |
| 15mm x 1/2" | Chromium plated | 91 | 58 | 54 | 10 | 661002 |

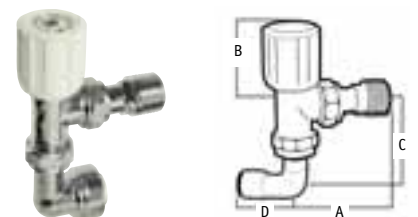**367 CPLS Angle pattern***compression connection with push-fit elbow connector*

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 82 | 49 | 52 | 10 | 661005 |
| 15mm x 1/2" | Chromium plated | 91 | 58 | 52 | 10 | 661006 |

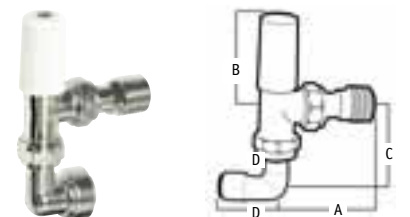


Manual radiator valves




367 CPDLS Angle pattern with drain off lockshield compression connection with push-fit elbow connector

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|-----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 97 | 49 | 52 | 10 | 661009 |
| 15mm x 1/2" | Chromium plated | 106 | 58 | 52 | 10 | 661010 |




367 CPWH Angle pattern compression connection with push-fit straight connector

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 62 | 43 | 54 | 10 | 661003 |
| 15mm x 1/2" | Chromium plated | 62 | 58 | 54 | 10 | 661004 |




367 CPLS Angle pattern compression connection with push-fit straight connector

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 62 | 43 | 52 | 10 | 661007 |
| 15mm x 1/2" | Chromium plated | 62 | 58 | 52 | 10 | 661008 |



367 CPDLS Angle pattern with drain off lockshield compression connection with push-fit straight connector

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 77 | 43 | 52 | 10 | 661011 |
| 15mm x 1/2" | Chromium plated | 77 | 58 | 52 | 10 | 661012 |




367PF CPWH Angle pattern integral push-fit connection with push-fit elbow connector

| Size | Finish | A | B | C | D | E | Quantity | Order code |
|--------------------------------|-----------------|----|----|----|----|----|----------|------------|
| 1/2" x 15mm with 10mm elbow | Chromium plated | 60 | 84 | 34 | 50 | 27 | 1 | 661201 |
| 1/2" x 15mm with 15mm elbow | Chromium plated | 60 | 84 | 34 | 53 | 33 | 1 | 661202 |

367PF CPWH Angle pattern

integral push-fit connection


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 1/2" x 10mm | Chromium plated | 60 | 84 | 34 | 1 | 661203 |
| 1/2" x 15mm | Chromium plated | 60 | 84 | 34 | 1 | 661204 |

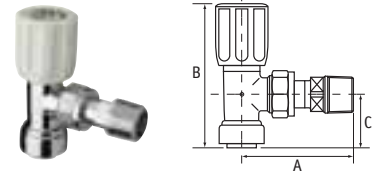

367PF CPLS Angle pattern


integral push-fit connection with push-fit elbow connector

| Size | Finish | A | B | C | D | E | Quantity | Order code |
|--------------------------------|-----------------|----|----|----|----|----|----------|------------|
| 1/2" x 15mm with 10mm elbow | Chromium plated | 60 | 87 | 35 | 50 | 27 | 1 | 661205 |
| 1/2" x 15mm with 15mm elbow | Chromium plated | 60 | 87 | 35 | 53 | 33 | 1 | 661206 |

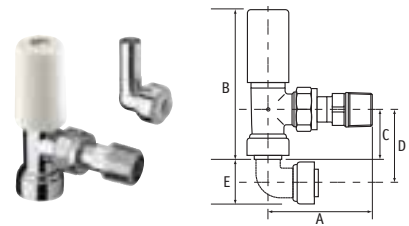

367PF CPLS Angle pattern


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|-----------------|----|----|----|----------|------------|
| 1/2" x 10mm | Chromium plated | 60 | 87 | 35 | 1 | 661207 |
| 1/2" x 15mm | Chromium plated | 60 | 87 | 35 | 1 | 661208 |

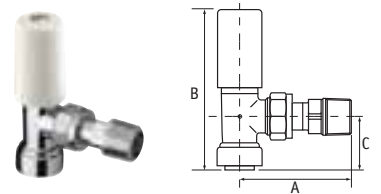

367PF CPDLS Angle pattern

integral push-fit connection with push-fit elbow connector

| Size | Finish | A | B | C | D | E | Quantity | Order code |
|--------------------------------|-----------------|----|----|----|----|----|----------|------------|
| 1/2" x 15mm with 10mm elbow | Chromium plated | 77 | 87 | 35 | 50 | 27 | 1 | 661209 |

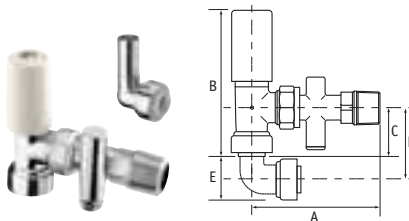


368 CPWH Straight pattern

integral push-fit connection with push-fit elbow connector

| Size | Finish | A | B | Quantity | Order code |
|-------------|-----------------|-----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 118 | 64 | 10 | 661013 |
| 15mm x 1/2" | Chromium plated | 127 | 64 | 10 | 661014 |




Manual radiator valves




368 CPLS Straight pattern compression with push-fit elbow connector

| Size | Finish | A | B | Quantity | Order code |
|-------------|-----------------|-----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 118 | 60 | 10 | 661017 |
| 15mm x 1/2" | Chromium plated | 127 | 60 | 10 | 661018 |



368 CPWH Straight pattern with push-fit straight connector

| Size | Finish | A | B | Quantity | Order code |
|-------------|-----------------|-----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 112 | 64 | 10 | 661015 |
| 15mm x 1/2" | Chromium plated | 127 | 64 | 10 | 661016 |



368 CPLS Straight pattern with push-fit straight connector


| Size | Finish | A | B | Quantity | Order code |
|-------------|-----------------|-----|----|----------|------------|
| 10mm x 1/2" | Chromium plated | 112 | 60 | 10 | 661019 |
| 15mm x 1/2" | Chromium plated | 127 | 60 | 10 | 661020 |

All chrome decorative radiator valves

Thermostatic radiator valves


Angle TRV

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|-----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 62 | 100 | 30 | 10 | 632220 |
| 10mm x 1/2" | Chromium plate | 62 | 100 | 30 | 10 | 632221 |



Straight TRV


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|-----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 69 | 109 | 34 | 10 | 632225 |
| 10mm x 1/2" | Chromium plate | 69 | 109 | 34 | 10 | 632226 |



Angle TRV & lockshield pack

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 62 | 52 | 30 | 10 | 632230 |
| 10mm x 1/2" | Chromium plate | 62 | 52 | 29 | 10 | 632231 |


* See TRV for dimensions



Straight TRV & lockshield pack

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|------|----------|------------|
| 15mm x 1/2" | Chromium plate | 69 | 61 | 36 | 10 | 632235 |
| 10mm x 1/2" | Chromium plate | 69 | 61 | 33.5 | 10 | 632236 |


* See TRV for dimensions




Straight TRV & lockshield push-fit straight

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|------|----------|------------|
| 10mm x 1/2" | Chromium plate | 69 | 61 | 33.5 | 10 | 662100 |

* See TRV for dimensions




All chrome decorative radiator valves

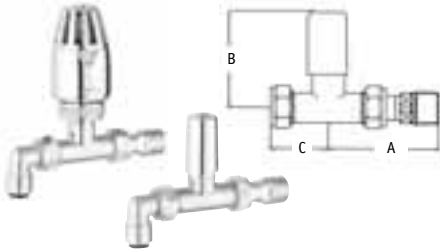

Straight TRV & lockshield push-fit elbows

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|------|----------|------------|
| 10mm x 1/2" | Chromium plate | 69 | 61 | 33.5 | 10 | 662101 |


* See TRV for dimensions

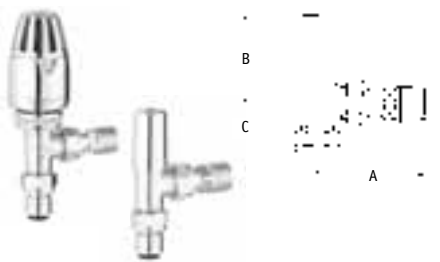

Angle TRV & lockshield push-fit straight

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plate | 62 | 52 | 30 | 10 | 662090 |


* See TRV for dimensions

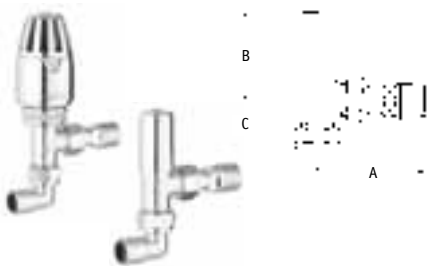

Angle TRV & lockshield push-fit elbows


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|----|----------|------------|
| 10mm x 1/2" | Chromium plate | 62 | 52 | 30 | 10 | 662091 |

* See TRV for dimensions

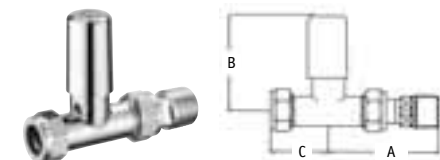

Lockshield straight towel rail valve


| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|------|----------|------------|
| 15mm x 1/2" | Chromium plate | 69 | 61 | 36 | 10 | 632215 |
| 10mm x 1/2" | Chromium plate | 69 | 61 | 33.5 | 10 | 632216 |

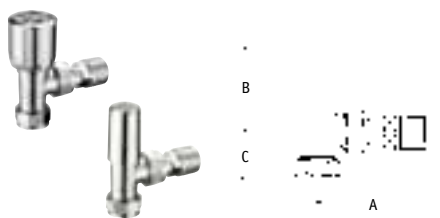

Angle wheelhead & lockshield pack

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|-----|----------|------------|
| 15mm x 1/2" | Chromium plate | 62 | 52 | 30 | 10 | 601200 |
| 10mm x 1/2" | Chromium plate | 62 | 52 | 30s | 10 | 601201 |

* See angle wheelhead for dimensions

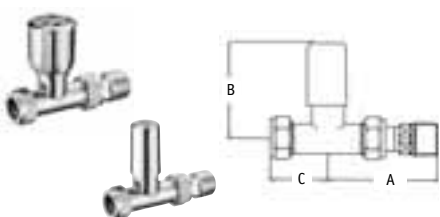

Straight wheelhead & lockshield pack

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|-------|----------|------------|
| 15mm x 1/2" | Chromium plate | 69 | 61 | 36 | 10 | 602200 |
| 10mm x 1/2" | Chromium plate | 69 | 61 | 33.5s | 10 | 602201 |


* See straight wheelhead for dimensions

Applications: pages 42-44 Product and tube compatibility: pages 45 System design considerations and installation: pages 46-47
Performance - pressure/temperature ratings and flow rates: pages 48-53 Care and maintenance: pages 54-55

Manual radiator valves


Cross-top traditional angle wheelhead & lockshield pack

| Size | Finish | A | B | C | D | Quantity | Order code |
|-------------|----------------|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 53 | 78 | 36 | 62 | 1 | 632300 |




Cross-top traditional straight wheelhead & lockshield pack

| Size | Finish | A | B | C | D | Quantity | Order code |
|-------------|----------------|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 32 | 78 | 35 | 50 | 1 | 632301 |




Cross-top modern angle wheelhead & lockshield pack

| Size | Finish | A | B | C | D | Quantity | Order code |
|-------------|----------------|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 53 | 62 | 36 | 64 | 1 | 632302 |




Cross-top modern straight wheelhead & lockshield pack

| Size | Finish | A | B | C | D | Quantity | Order code |
|-------------|----------------|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 64 | 65 | 35 | 50 | 1 | 632303 |




Minimalist-modern angle wheelhead & lockshield pack

| Size | Finish | A | B | C | D | Quantity | Order code |
|-------------|----------------|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 53 | 57 | 36 | 31 | 1 | 632304 |
| 15mm x 1/2" | Satin Nickel | 53 | 57 | 36 | 31 | 1 | 632305 |




Minimalist-modern straight wheelhead & lockshield pack

| Size | Finish | A | B | C | D | Quantity | Order code |
|-------------|----------------|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 31 | 60 | 35 | 50 | 1 | 632306 |
| 15mm x 1/2" | Satin Nickel | 31 | 60 | 35 | 50 | 1 | 632307 |




Applications: pages 42-44 Product and tube compatibility: pages 45 System design considerations and installation: pages 46-47
Performance - pressure/temperature ratings and flow rates: pages 48-53 Care and maintenance: pages 54-55

All chrome decorative radiator valves





Ultra-modern angle wheelhead & lockshield pack

| Size | Finish | A | B | C | D | E | F | Quantity | Order code |
|-------------|----------------|----|----|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 53 | 55 | 38 | 44 | 30 | 38 | 1 | 632308 |



Ultra-modern straight wheelhead & lockshield pack

| Size | Finish | A | B | C | D | E | F | Quantity | Order code |
|-------------|----------------|----|----|----|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 53 | 60 | 38 | 44 | 30 | 43 | 1 | 632309 |




Wheelhead angle towel rail valve

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|---------|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 62 | 54 open | 30 | 10 | 632201 |
| 10mm x 1/2" | Chromium plate | 62 | 54 open | 29 | 10 | 632202 |




Lockshield angle towel rail valve

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|----|----|----------|------------|
| 15mm x 1/2" | Chromium plate | 62 | 52 | 30 | 10 | 632205 |
| 10mm x 1/2" | Chromium plate | 62 | 52 | 29 | 10 | 632206 |



Wheelhead straight towel rail valve

| Size | Finish | A | B | C | Quantity | Order code |
|-------------|----------------|----|---------|------|----------|------------|
| 15mm x 1/2" | Chromium plate | 69 | 62 open | 36 | 10 | 632210 |
| 10mm x 1/2" | Chromium plate | 69 | 62 open | 33.5 | 10 | 632211 |



Applications: pages 42-44 Product and tube compatibility: pages 45 System design considerations and installation: pages 46-47
Performance - pressure/temperature ratings and flow rates: pages 48-53 Care and maintenance: pages 54-55


Heating controls

Programmings

TP1 Single channel programmer

7 day programmer with 3 on-off periods per day


| A | B | C | Pack Qty | Order code |
|----|----|-----|----------|------------|
| 85 | 34 | 149 | 1 | 658001 |

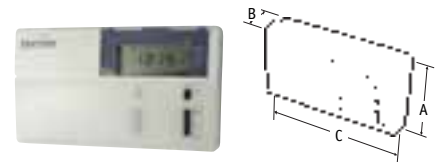

TP2 Two channel programmer

7 day programmer with 3 on-off periods per day


| A | B | C | Pack Qty | Order code |
|----|----|-----|----------|------------|
| 85 | 34 | 149 | 1 | 658002 |

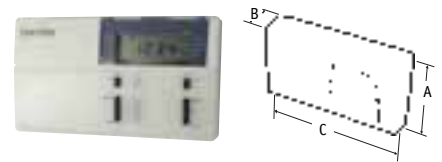

TP3 Three channel programmer


7 day programmer with 3 on-off periods per day.
Different settings for every day of the week

| A | B | C | Pack Qty | Order code |
|-----|----|-----|----------|------------|
| 103 | 35 | 165 | 1 | 658003 |

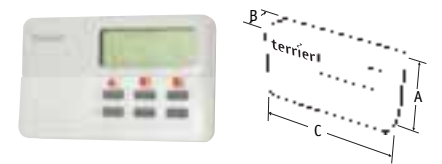


TMP1 Single channel electro-mechanical programmer

| A | B | C | Pack Qty | Order code |
|-----|-----|----|----------|------------|
| 152 | 107 | 39 | 1 | 658011 |

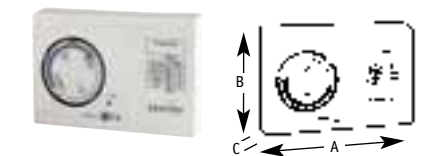


TMP2 Two channel electro-mechanical programmer

| A | B | C | Pack Qty | Order code |
|-----|-----|----|----------|------------|
| 152 | 107 | 39 | 1 | 658012 |

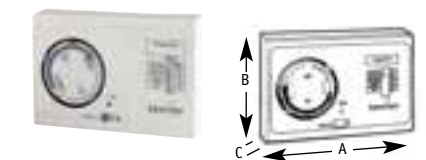


Heating controls

Thermostats




TRT1 Room thermostat
230V, 50Hz Contact rating 10(3)A 5°C - 30°C operating range

| A | B | C | Pack Qty | Order code |
|----|----|----|----------|------------|
| 84 | 29 | 84 | 1 | 658021 |




TRT1WL Room thermostat with light
230V, 50Hz Contact rating 10(3)A 5°C - 30°C operating range

| A | B | C | Pack Qty | Order code |
|----|----|----|----------|------------|
| 84 | 29 | 84 | 1 | 658032 |



TFT1 Frost thermostat
230V, 50Hz Contact rating 10(3)A 5°C - 30°C operating range

| A | B | C | Pack Qty | Order code |
|----|----|----|----------|------------|
| 84 | 29 | 84 | 1 | 658022 |




TCT1 Cylinder thermostat
230V, 50Hz Contact rating 16(3)A 30°C - 90°C operating range

| A | B | C | Pack Qty | Order code |
|-----|----|----|----------|------------|
| 115 | 28 | 48 | 1 | 658023 |

Zone valves


TZV Zone valve – compression 2-port valve body

| Size | A | B | C | D | Pack Qty | Order code |
|------|----|-----|----|-----|----------|------------|
| 22mm | 55 | 110 | 91 | 112 | 1 | 658051 |
| 28mm | 60 | 120 | 91 | 114 | 1 | 658052 |

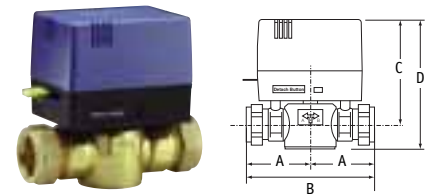

TMPV Mid-position valve – compression 3-port valve body


| Size | A | B | C | D | Pack Qty | Order code |
|------|----|-----|----|-----|----------|------------|
| 22mm | 55 | 110 | 91 | 139 | 1 | 658053 |
| 28mm | 60 | 120 | 91 | 143 | 1 | 658054 |

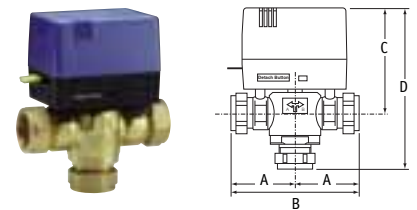

Wiring centre

TWC1 Wiring centre 10 terminal wiring centre

| A | B | C | Pack Qty | Order code |
|----|----|-----|----------|------------|
| 84 | 29 | 150 | 1 | 658071 |

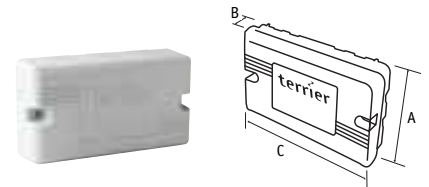

Control packs

TP2ZV Zone control pack

Includes the following: TZV Zone Valve, TWC1 Wiring Centre, TP2 Programmer, TCT1 Cylinder Thermostat, TRT1 Room Thermostat

| Size | Quantity | Order code |
|------|----------|------------|
| 22mm | 1 | 658081 |
| 28mm | 1 | 658082 |



TMPV22 Mid-position control pack

Includes the following: TMPV Mid-position Valve, TWC1 Wiring Centre, TMP2 Programmer, TCT1 Cylinder Thermostat, TRT1 Room Thermostat

| Size | Quantity | Order code |
|------|----------|------------|
| 22mm | 1 | 658109 |



Applications: pages 42-44 Product and tube compatibility: pages 45 System design considerations and installation: pages 46-47
Performance - pressure/temperature ratings and flow rates: pages 48-53 Care and maintenance: pages 54-55

Heating controls



TP2MPV28 Mid-position control pack

Includes the following: TMPV Mid-position Valve, TWC1 Wiring Centre, TP2 Programmer, TCT1 Cylinder Thermostat, TRT1 Room Thermostat

| Size | Quantity | Order code |
|------|----------|------------|
| 22mm | 1 | 658083 |
| 28mm | 1 | 658084 |



TMP1TRT1 Combi control pack

Includes the following: TMP1 Programmer, TRT1 Room Thermostat


| Quantity | Order code |
|----------|------------|
| 1 | 658110 |

Differential pressure bypass valves and circulating pumps

Differential pressure bypass valves


USV22 Differential pressure valve for copper or iron

| Size | Finish | L | H | Quantity | Order code |
|------|----------|----|-----|----------|------------|
| 22mm | Gunmetal | 63 | 106 | 1 | 678021 |



USVR20 Differential pressure valve for copper or iron


| Size | Finish | D1 | D | L | H | h | Quantity | Order code |
|--------|----------|--------|--------|------|-----|----|----------|------------|
| 3/4" | Gunmetal | 3/4" | 3/4" | 70 | 120 | 26 | 1 | 678022 |
| 1" | Gunmetal | 1" | 1" | 83.5 | 138 | 33 | 1 | 678023 |
| 1 1/4" | Gunmetal | 1 1/4" | 1 1/4" | 100 | 148 | 39 | 1 | 678024 |



Domestic circulating pumps

Domestic circulating pump 230V, 50Hz. 10bar maximum pressure, 0.15bar minimum pressure.


| Model | A | B | C | D | E | Quantity | Order code |
|-------------------|----|----|-----|-----|----|----------|------------|
| TC5 (5M max head) | 78 | 50 | 110 | 110 | 26 | 1 | 657001 |
| TC6 (6M max head) | 78 | 50 | 110 | 26 | 65 | 1 | 657002 |



Bulldog pump isolating ball valves


PB300P Bulldog circulator pump isolating ball valve Test pressure 24bar/30°C. Max. working pressure PN16 (16bar). Max. operating temperature 120°C

| Size | A | B | C | Quantity | Order code |
|------|------|------|----|----------|------------|
| 22mm | 63 | 29.5 | 41 | 1 | 553002 |
| 28mm | 64.5 | 29.5 | 41 | 1 | 553003 |
| 22mm | 63 | 29.5 | 41 | 2 | 553008 |
| 28mm | 64.5 | 29.5 | 41 | 2 | 553009 |



Differential pressure bypass valves and circulating pumps

Air separators



VEN 1201 Air separator for copper with cold feed inlet

| Size | A | B | C | D | E | Quantity | Order code |
|------|-----|-----|----|----|----|----------|------------|
| 22mm | 213 | 150 | 84 | 35 | 22 | 20 | 636008 |
| 28mm | 220 | 150 | 80 | 35 | 22 | 20 | 636009 |


Commercial manual and thermostatic radiator valves

Thermostatic radiator valves to EN 215

Packaged units: bodies and B1301/3 liquid head


B4451/4 Angle horizontal

| Size | Finish | A | B | C | D | E | Quantity | Order code |
|------------------|-----------------|----|-----|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 34 | 104 | 53 | 84 | 53 | 10 | 686001 |

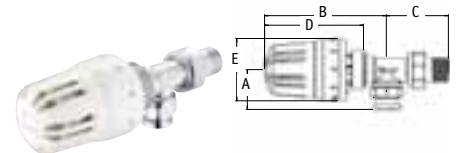

B4452/4 Angle vertical


| Size | Finish | A | B | C | D | E | Quantity | Order code |
|------------------|-----------------|----|-----|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 52 | 104 | 34 | 84 | 53 | 10 | 686002 |

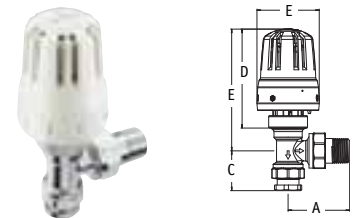

Manual radiator valves to BS 2767-10


97 WH and CPWH Angle pattern - for copper or iron

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Matt brass | 53 | 63 | 35 | 10 | 680001 |
| 3/4"/22mm x 3/4" | Matt brass | 63 | 56 | 56 | 5 | 680004 |
| 1/2"/15mm x 1/2" | Chromium plated | 53 | 63 | 35 | 10 | 680007 |
| 3/4"/22mm x 3/4" | Chromium plated | 63 | 56 | 56 | 5 | 680010 |

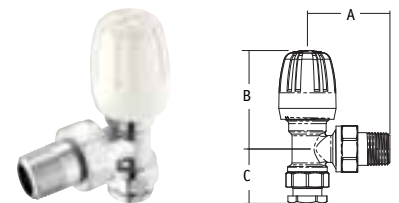


97 LS and CPLS Angle pattern - for copper or iron

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Matt brass | 53 | 63 | 35 | 10 | 680002 |
| 3/4"/22mm x 3/4" | Matt brass | 61 | 64 | 41 | 5 | 680005 |
| 1/2"/15mm x 1/2" | Chromium plated | 53 | 63 | 35 | 10 | 680008 |
| 3/4"/22mm x 3/4" | Chromium plated | 61 | 64 | 41 | 5 | 680011 |

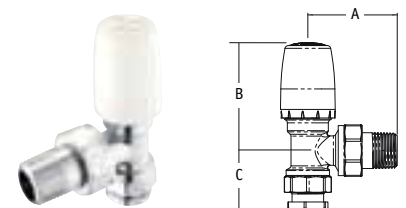



97 CPDLS Angle pattern with drain off - for copper or iron

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 81 | 63 | 35 | 10 | 680009 |

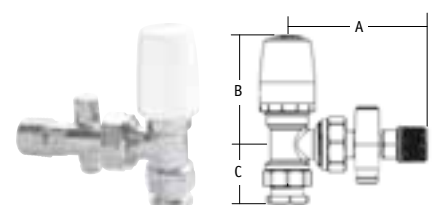


Applications: pages 42-44 Product and tube compatibility: pages 45 System design considerations and installation: pages 46-47
Performance - pressure/temperature ratings and flow rates: pages 48-53 Care and maintenance: pages 54-55

Commercial manual and thermostatic radiator valves

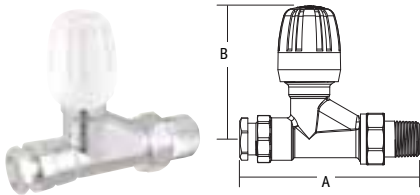

98 WH and CPWH Straight pattern - for copper or iron

| Size | Finish | A | B | Quantity | Order code |
|------------------|-----------------|-----|----|----------|------------|
| 1/2"/15mm x 1/2" | Matt brass | 105 | 78 | 10 | 681001 |
| 3/4"/22mm x 3/4" | Matt brass | 130 | 83 | 5 | 681004 |
| 1/2"/15mm x 1/2" | Chromium plated | 105 | 78 | 10 | 681007 |
| 3/4"/22mm x 3/4" | Chromium plated | 130 | 83 | 5 | 681010 |




98 LS Straight pattern - for copper or iron

| Size | Finish | A | B | Quantity | Order code |
|------------------|-----------------|-----|----|----------|------------|
| 1/2"/15mm x 1/2" | Matt brass | 105 | 78 | 10 | 681002 |
| 3/4"/22mm x 3/4" | Matt brass | 130 | 83 | 5 | 681005 |
| 1/2"/15mm x 1/2" | Chromium plated | 105 | 78 | 10 | 681008 |
| 3/4"/22mm x 3/4" | Chromium plated | 130 | 83 | 5 | 681011 |


Lockshield valve bodies

Tamper proof – metal cap – for copper or iron pipe



LS 351/3 Angle vertical

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 53 | 39 | 35 | 20 | 686050 |
| 3/4"/22mm x 3/4" | Chromium plated | 61 | 40 | 41 | 20 | 686051 |



LS 352/4 Straight vertical


| Size | Finish | A | B | Quantity | Order code |
|------------------|-----------------|-----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 105 | 54 | 20 | 686052 |
| 3/4"/22mm x 3/4" | Chromium plated | 130 | 59 | 20 | 686053 |

Thermostatic valve bodies

Valve bodies for normal systems – black cap – for copper or iron pipe


VB 1390/4 Angle horizontal

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 34 | 36 | 53 | 10 | 686030 |
| 3/4"/22mm x 3/4" | Chromium plated | 38 | 37 | 63 | 5 | 686031 |




VB 1290/4 Angle vertical

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 53 | 36 | 34 | 10 | 686032 |
| 3/4"/22mm x 3/4" | Chromium plated | 63 | 37 | 38 | 5 | 686033 |




VB 1490/4 Straight

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 43 | 41 | 51 | 10 | 686034 |
| 3/4"/22mm x 3/4" | Chromium plated | 45 | 47 | 62 | 5 | 686035 |




Commercial manual and thermostatic radiator valves

Thermostatic preset valve bodies




VB 1390/4P Angle horizontal preset

| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 34 | 36 | 53 | 10 | 686080 |
| 3/4"/22mm x 3/4" | Chromium plated | 38 | 37 | 63 | 5 | 686081 |



VB 1290/4P Angle vertical preset


| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 53 | 36 | 34 | 10 | 686082 |
| 3/4"/22mm x 3/4" | Chromium plated | 63 | 37 | 38 | 5 | 686083 |



VB 1490/4P Straight preset


| Size | Finish | A | B | C | Quantity | Order code |
|------------------|-----------------|----|----|----|----------|------------|
| 1/2"/15mm x 1/2" | Chromium plated | 43 | 41 | 51 | 10 | 686084 |
| 3/4"/22mm x 3/4" | Chromium plated | 45 | 47 | 62 | 5 | 686085 |

Thermostatic heads



B1301/4 Liquid TRV head with zero position

| A | B | Quantity | Order code |
|----|-----------------------|----------|------------|
| 53 | 87 unlocked 84 locked | 1 | 686005 |




B1401/4 (2M) Liquid TRV head with 2m remote sensor

| A | B | C | D | Quantity | Order code |
|----|-----------------------|-----|----|----------|------------|
| 53 | 87 unlocked 84 locked | 100 | 39 | 1 | 686006 |

Thermostatic heads


B1401/4 (8M) Liquid TRV head with 8m remote sensor

| A | B | C | D | Quantity | Order code |
|----|-----------------------|-----|----|----------|------------|
| 53 | 87 unlocked 84 locked | 100 | 39 | 1 | 686009 |

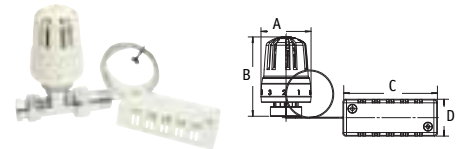

B1701/4 Liquid TRV head with remote adjuster

| Sensor | A | B | C | D | Quantity | Order code |
|--------|----|-----------------------|------|----|----------|------------|
| 2m | 85 | 75 unlocked 72 locked | 64.7 | 33 | 1 | 686011 |
| 5m | 85 | 75 unlocked 72 locked | 64.7 | 33 | 1 | 686012 |
| 8m | 85 | 75 unlocked 72 locked | 64.7 | 33 | 1 | 686013 |

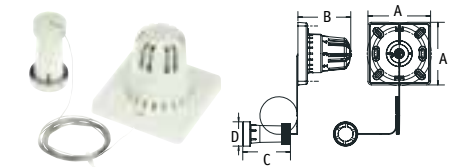


Accessories

Terrier and Belmont accessories


| | Size | Quantity | Order code |
|---|------|----------|------------|
| Belmont III TRV security clip | – | 20 | 686102 |
| Security clip release tool | – | 1 | 686103 |
| Retaining clips for capillary tube <i>(B 1401/3 & B 1701/3) 20 clips/nails per set</i> | – | 10 sets | 686104 |
| Iron pipe connection without nut | 1/2" | 10 | 686105 |
| Iron pipe connection without nut | 3/4" | 10 | 686106 |
| Copper compression fitting <i>For 3/4" valve bodies (black cap only)</i> | 22mm | 10 | 686107 |
| Remote sensor housing | – | 1 | 686117 |
| RG1205/3 Belmont III TRV gland removal tool | – | 1 | 686100 |
| RG1205/4 Belmont IV TRV gland removal tool | – | 1 | 686200 |
| B 1301/3 & B 1401/3 locking/limiting pins | – | 20 | 686101 |

All system drawings are a representation of various systems.


Types of system

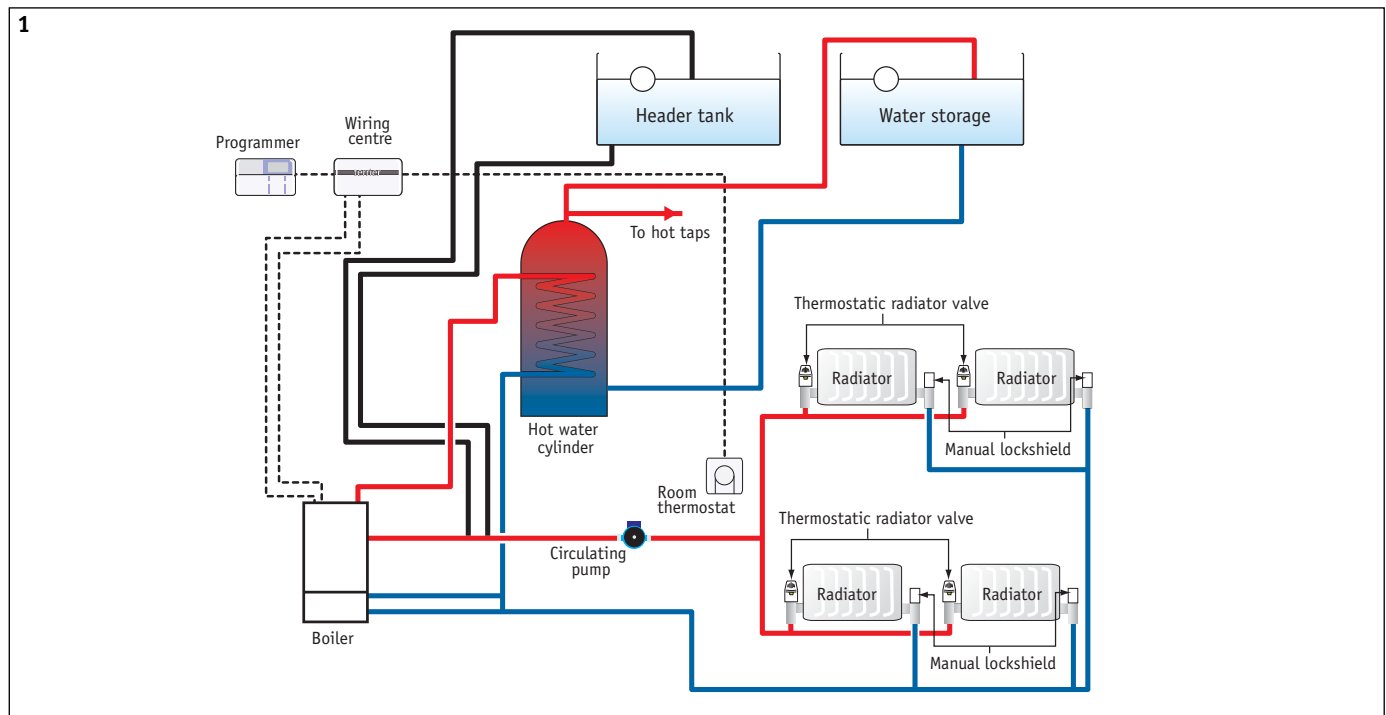


Gravity hot water system (open vented)

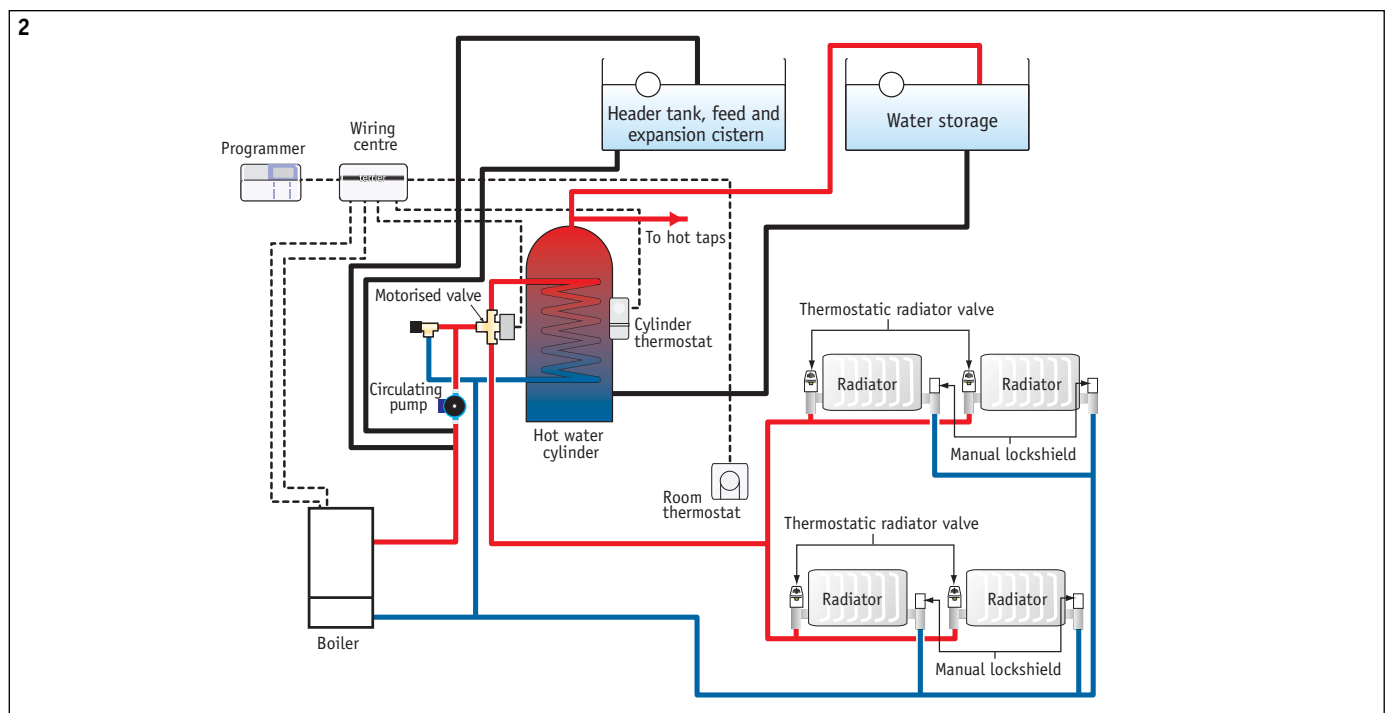

Fully pumped system (open vented)

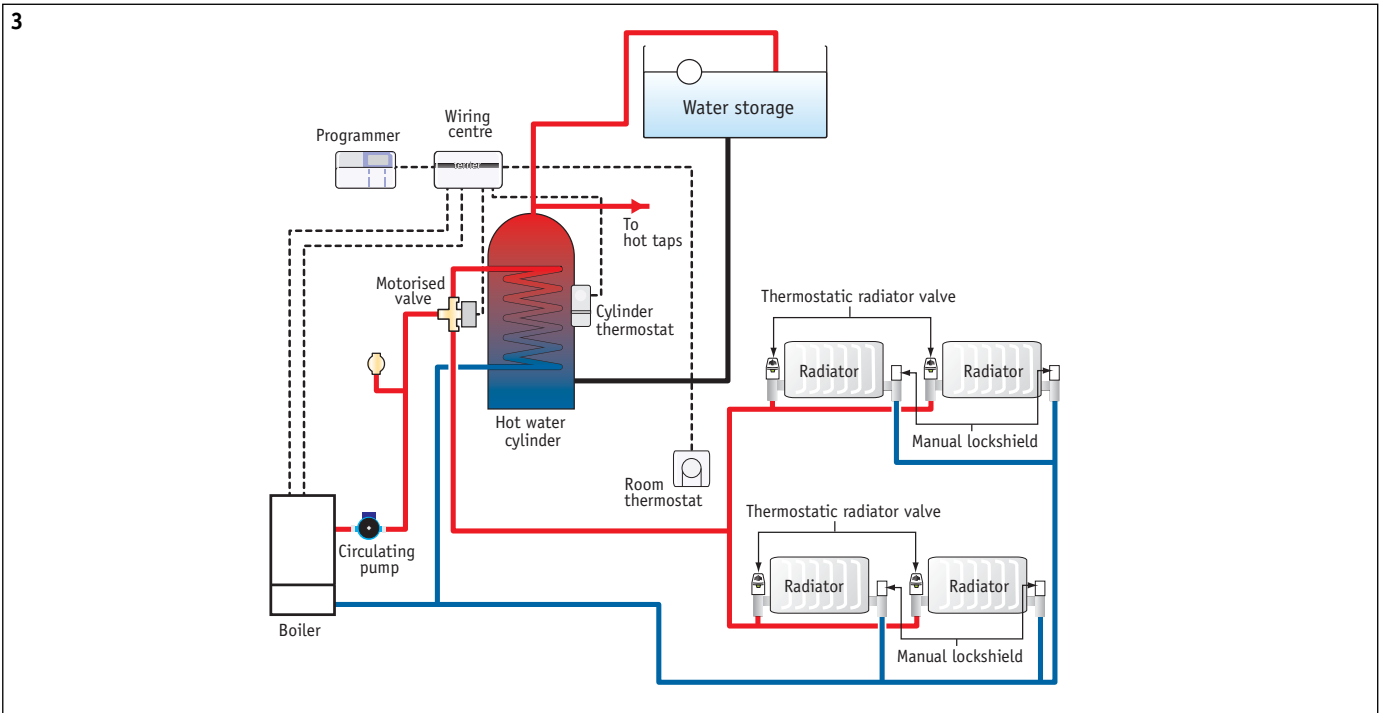


Sealed system vented DHW

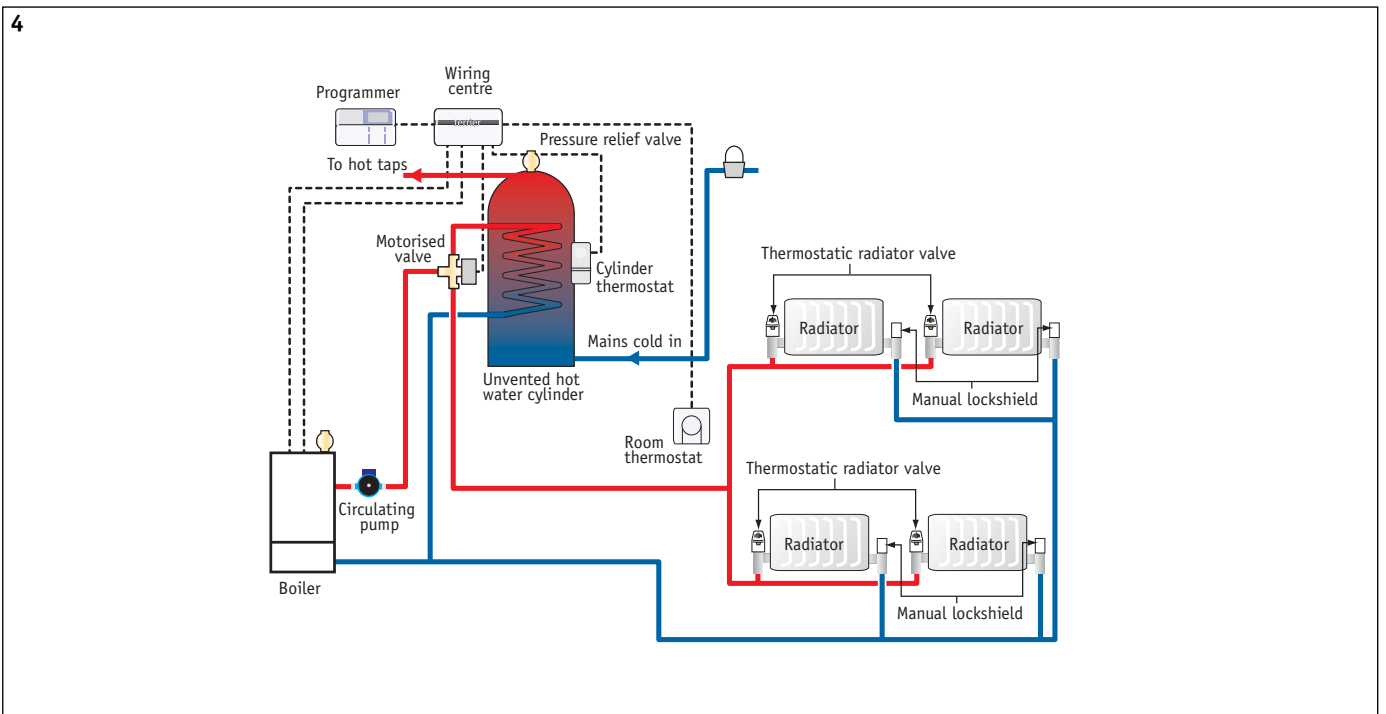


Sealed system unvented DHW

5

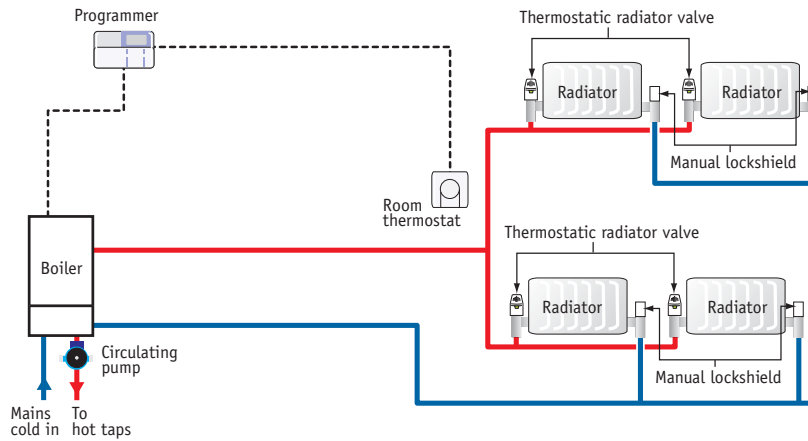

Combination boiler

6

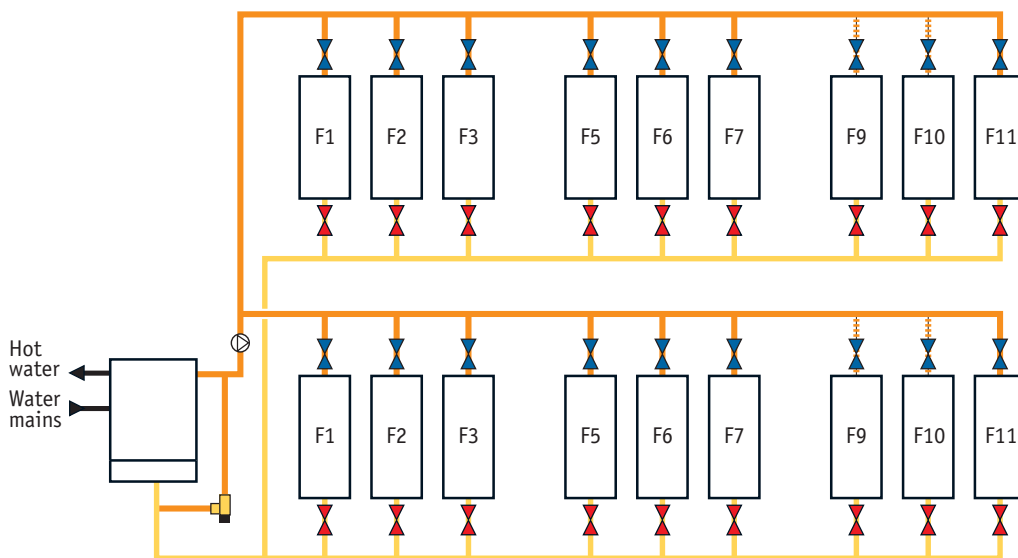

Commercial system example

| Product recommended | TYPES OF SYSTEM | | | | | |
|------------------------------|------------------------------|-------------------------|------------------------------|--------------------------------|------------------------|-------------------------------|
| | Gravity hot water system (1) | Fully pumped system (2) | Sealed system vented DHW (3) | Sealed system unvented DHW (4) | Combination boiler (5) | Commercial system example (6) |
| Thermostatic radiator valves | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Manual radiator valves | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Motorized valves | x | ✓ | ✓ | ✓ | ✓ | ✓ |
| Room thermostats | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Programmable | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Cylinder thermostats | ✓ | ✓ | ✓ | ✓ | x | ✓ |
| Frost thermostats | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Domestic circulating pumps | ✓ | ✓ | ✓ | x | x | x |
| Automatic bypass valves | x | ✓ | x | x | ✓ | ✓ |

Tube compatibility

| | TUBE COMPATIBILITY | | | | |
|---------------------|--------------------|--------|--------|------|--------|
| | Copper | Chrome | PEX/PB | Iron | Carbon |
| Terrier compression | ✓ | ✓ | x | x | x |
| Terrier push-fit | ✓ | ✓ | ✓ | x | x |
| Belmont (adaptor)* | ✓ | x | ✓* | ✓ | ✓* |


*Pegler Yorkshire has a range of push and press connectors in the Tectite range for use with plastic, carbon steel or copper piping.

Introduction

In line with the Government's Good Practice Guide GPG302, Pegler Yorkshire explains the importance of system design and best practice.

Installation of effective controls has a major impact on the energy consumption of heating and hot water systems and can lead to improved energy efficiency, reduced running cost and lower carbon dioxide (CO₂) emissions.

- Using controls increases operating efficiency when updating older systems, and provides the user to minimise energy consumption by reducing comfort temperatures
- Heating and hot water accounts for over 80% of the energy consumption in a home
- The installation of a minimum standard of controls in a wet system (which previously had no controls) can reduce fuel consumption and CO₂ emissions by 17%
- Reducing the heating "on" time by two hours a day can reduce consumption by 6%.

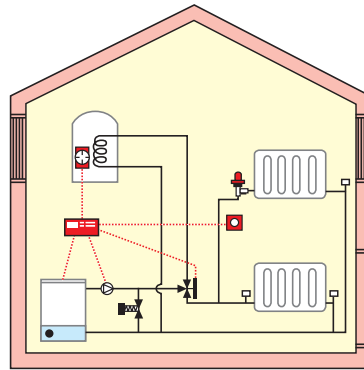

- System controls**
- Room thermostat
 - Time switch/programmer
 - ⊕ Cylinder thermostat
 - ⊗ Motorised valve
 - ⊕ Thermostatic radiator valve (TRV)
 - ⊗ Automatic bypass valve

SYSTEM CONSIDERATIONS

| Product | System Design Consideration |
|------------------------------|--|
| Thermostatic radiator valves | ● Thermostatic radiator valves should be installed in association with a room thermostat to provide boiler interlock. If more than 50% of the location is fitted with TRVs then an automatic bypass valve will be required. (Terrier TRV, ABV). |
| Manual radiator valves | ● Radiators in rooms with a controlling room thermostat should be fitted with manual valves on connections. (Terrier manual radiator valves). |
| Controls | <ul style="list-style-type: none"> ● Systems with regular boilers must have separately controlled circuits to hot water cylinder and radiators, and both circuits must have pumped circulation. (Terrier programmer, Terrier pump) ● Room thermostats, programmable room thermostats, cylinder thermostats, programmers and time switches must be wired so they are interlocked with the boiler and pump i.e. they prevent the boiler from firing when there is no demand for heat (Terrier controls). |
| Frost protection | <ul style="list-style-type: none"> ● Frost protection must be provided where necessary to protect the appliance, system and dwelling, (Terrier TRV, Frost Thermostats) ● A bypass circuit must be installed if the boiler manufacturer specifies that a minimum flow rate has to be maintained while the boiler is firing. The installed bypass circuit must then include an automatic bypass valve. (Terrier ABV). |

New systems and upgrading systems

In order to adhere to the Building Regulations there are two levels of compliance: a minimum set level and a best practice. As a respected manufacturer, Pegler Yorkshire is responsible to promote a best practice approach.

MINIMUM SET LEVEL AND PEGLER YORKSHIRE BEST PRACTICE

| Product | Minimum Set | Best Practice |
|-----------------|---|---|
| Combi Boilers | <ul style="list-style-type: none"> ● Time switch ● Room thermostat ● TRVs on all radiators except rooms with a room thermostat ● Automatic bypass valve | <ul style="list-style-type: none"> ● Programmable room thermostats ● TRVs on all radiators except rooms with a room thermostat ● Automatic bypass valve |
| Regular Boilers | <ul style="list-style-type: none"> ● Room thermostats ● Full programmer ● Cylinder thermostat ● TRVs on all radiators except rooms with a room thermostat ● Automatic bypass valve | <ul style="list-style-type: none"> ● Programmable room thermostats with additional hot water timing capability ● Cylinder thermostat ● TRVs on all radiators except rooms with a room thermostat ● Automatic bypass valve |

| INSTALLATION BEST PRACTICE | |
|---|--|
| <i>Product</i> | <i>Installation Best Practice</i> |
| Domestic thermostatic radiator valves the avoided | <ul style="list-style-type: none"> ● Installation of TRVs is recommended in a forward flow position, however the Terrier TRV can be installed in either direction with its reverse flow technology ● For maximum performance the TRV is best fitted at the top of the radiator with the head fitted horizontally away from the radiator ● Thermostatic heads above the top of the radiator must be avoided ● For maximum energy efficiency the TRV should be set to "3" for economy setting to reduce fuel bills, in areas of non requirement the valve should be set to a frost setting. |
| Commercial thermostatic radiator valves remote | <ul style="list-style-type: none"> ● Locking and limiting devices should be used when in need of security; Belmont heads have as standard a patented "lift and lock" mechanism to prevent unauthorised adjustment or tampering in public places of high tamper risk areas ● Avoid installing TRVs in concealed areas, remote adjuster and sensors should be installed in order to read temperature accurately ● To improve efficiency with a balanced system and long term maintenance, presetting valve bodies should be used to allow adjustment to the flow, and minimise the exercise of balancing the system at the event of maintenance ● When installing radiator valves in large systems it important to select radiator valves with removable glands. The Belmont range has a special tool that allows removal of gland without draining down the system. |
| Domestic subject manual radiator valves difficult | <ul style="list-style-type: none"> ● Manual valves can be used on existing and new radiators – to the requirements of the Building Regulations ● Manuals should fitted where the ambient temperature is difficult to control, e.g. kitchen and bathroom ● Manuals can also be used to relieve pressure build up within a heating system ● Push-fit connection manuals are recommended where the installation is using plastic pipe. |
| Controls carried that | <ul style="list-style-type: none"> ● The installation and connection of mains voltage must be carried out by a suitably competent person and in accordance with the installation instructions ● The mains electrical supply to the installation must be isolated before installation and maintenance of the product ● Timeswitches should only be used for one circuit heating or hot water and should be installed in a easy to reach area ● Room thermostats should be installed in a regularly heated area that allows free circulation, away from heat sources and in route of draughts. |
| Domestic remove any circulating pumps | <ul style="list-style-type: none"> ● It is good plumbing practice to flush the heating system to remove debris or sediments prior to installation. This will help to prolong the life of the pump and improve the system's performance and efficiency ● Terrier circulating pumps should only be used for indirect open-vented, sealed heating systems or indirect hot water systems. ● With the exception of approved corrosion inhibitors, cleaners or anti-freeze, Terrier circulating pumps must not be used with liquids or chemicals other than water. (Full details can be found |


Terrier thermostatic radiator valves

| | |
|---|-----------------|
| Nominal flow rates | |
| 1/2" x 15mm angle forward and reverse flow | 190kg/h |
| 1/2" x 15mm straight forward and reverse flow | 190kg/h |
| Maximum static pressure | |
| | 10 bar at 120°C |
| Maximum differential pressure | |
| | 0.6 bar |
| Hysteresis | |
| All thermal heads | 0.8k |
| Differential pressure influence | |
| All thermal heads | 0.15k |
| Water temperature influence | |
| All thermal heads | 0.9k |
| Response time | |
| All thermal heads | 20 minutes |

Belmont thermostatic radiator valves


| | |
|--|----------------|
| Nominal flow rates | |
| 1/2" angle and reverse angle forward flow | 206kg/h |
| 1/2" angle and reverse angle reverse flow | 220kg/h |
| 1/2" straight pattern forward and reverse flow | 195kg/h |
| 3/4" patterns | 265kg/h |
| Maximum static pressures | |
| | 10bar at 120°C |
| Maximum differential pressures | |
| | 0.6bar |
| Hysteresis | |
| | 0.5k |
| Differential pressure influence | |
| All variants forward | 0.15k |
| All variants reverse | -0.25k |
| Water temperature influence | |
| Fixed thermal head | 0.9k |
| Remote sensing and remote adjusting heads | 0.5k |
| Response time | |
| All TRV head variants - vertical | 24 minutes |
| All TRV head variants - horizontal | 20 minutes |

Straight and angle pattern 15mm forward and reverse flow

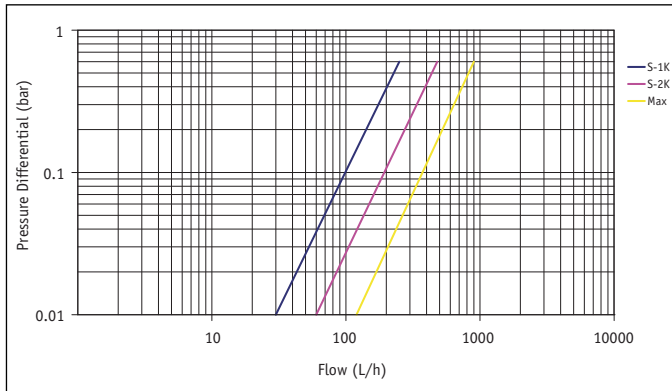


| | | | |
|---------------------|-------------------------|-----------------|-----------|
| Nominal flow | Seat authority a | Position | kv |
| 190kg/h | 0.72 | S-1K | 0.32 |
| | | S-2K | 0.60 |
| | | Max. | 1.08 |

1/2" angle and reverse angle pattern forward flow

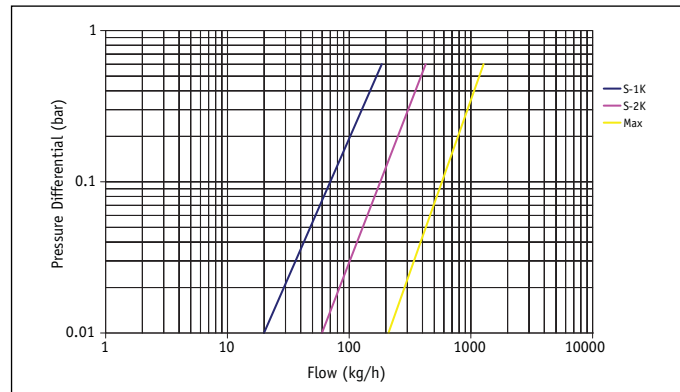

| | | | |
|---------------------|-------------------------|-----------------|-----------|
| Nominal flow | Seat authority a | Position | kv |
| 206kg/h | 0.90 | S-1K | 0.23 |
| | | S-2K | 0.52 |
| | | Max. | 1.74 |


1/2" angle and reverse angle pattern reverse flow

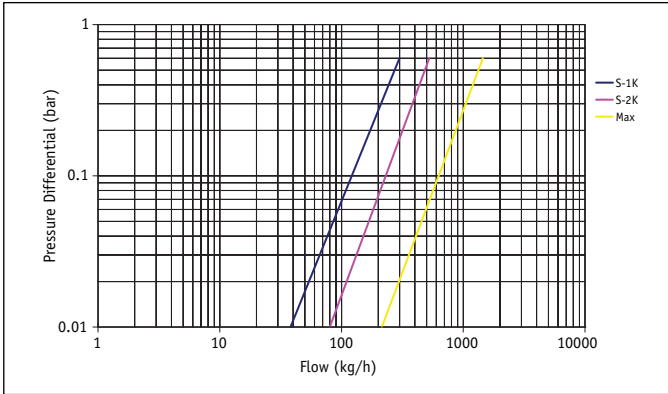

| Nominal flow | Seat authority a |
|--------------|------------------|
| 220kg/h | 0.90 |

| Position | kv |
|----------|------|
| S-1K | 0.38 |
| S-2K | 0.74 |
| Max. | 1.94 |


3/4" angle and reverse angle pattern forward and reverse flow

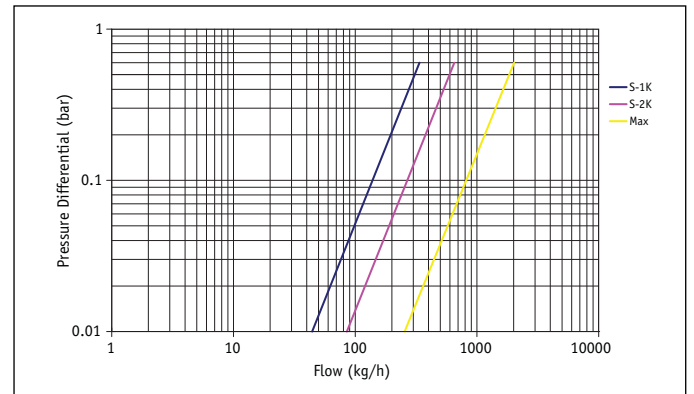

| Nominal flow | Seat authority a |
|--------------|------------------|
| 265kg/h | 0.89 |

| Position | kv |
|----------|------|
| S-1K | 0.44 |
| S-2K | 0.84 |
| Max. | 2.53 |


1/2" straight pattern forward and reverse flow

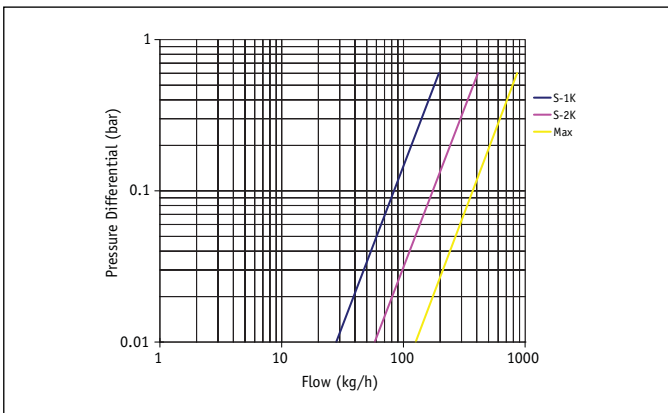

| Nominal flow | Seat authority a |
|--------------|------------------|
| 195kg/h | 0.77 |

| Position | kv |
|----------|------|
| S-1K | 0.25 |
| S-2K | 0.54 |
| Max. | 1.13 |


3/4" straight pattern forward flow

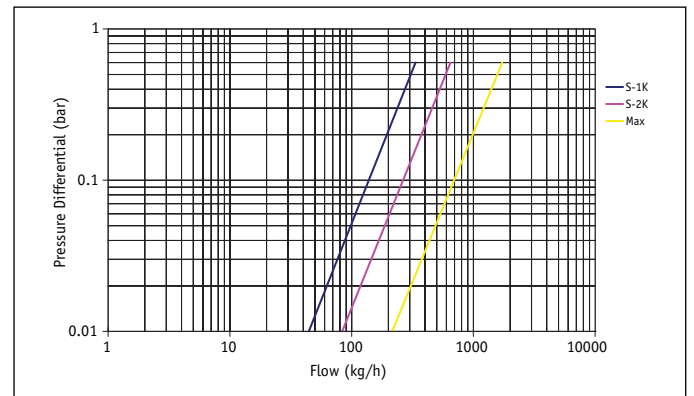

| Nominal flow | Seat authority a |
|--------------|------------------|
| 265kg/h | 0.85 |


| Position | kv |
|----------|------|
| S-1K | 0.44 |
| S-2K | 0.84 |
| Max. | 2.15 |

3/4" straight pattern reverse flow

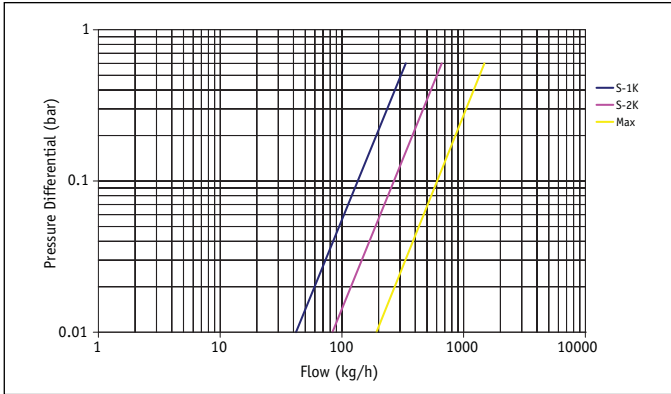

| Nominal flow | Seat authority a | Position | kv |
|--------------|------------------|----------|------|
| 265kg/h | 0.80 | S-1K | 0.44 |
| | | S-2K | 0.84 |
| | | Max. | 1.87 |


1/2" angle and reverse angle pattern reverse flow pre-setting

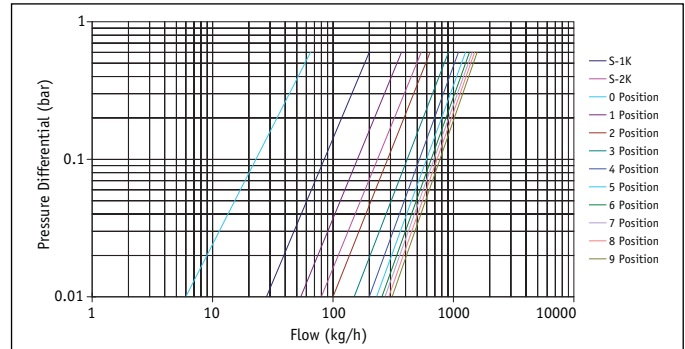

| Setting | Nominal flow (kg/h) | Seat authority a | Position | kv |
|---------|---------------------|------------------|----------|------|
| 0 | 45 | 0.00 | S-1K | 0.26 |
| 1 | 164 | 0.00 | S-2K | 0.70 |
| 2 | 220 | 0.38 | 0 | 0.08 |
| 3 | 220 | 0.68 | 1 | 0.48 |
| 4 | 220 | 0.81 | 2 | 0.83 |
| 5 | 220 | 0.88 | 3 | 1.17 |
| 6 | 220 | 0.91 | 4 | 1.42 |
| 7 | 220 | 0.94 | 5 | 1.63 |
| 8 | 220 | 0.95 | 6 | 1.76 |
| 9 | 220 | 0.96 | 7 | 1.85 |
| | | | 8 | 1.94 |
| | | | 9 | 2.03 |


Belmont pre-set thermostatic radiator valves

1/2" angle and reverse angle pattern forward flow pre-setting

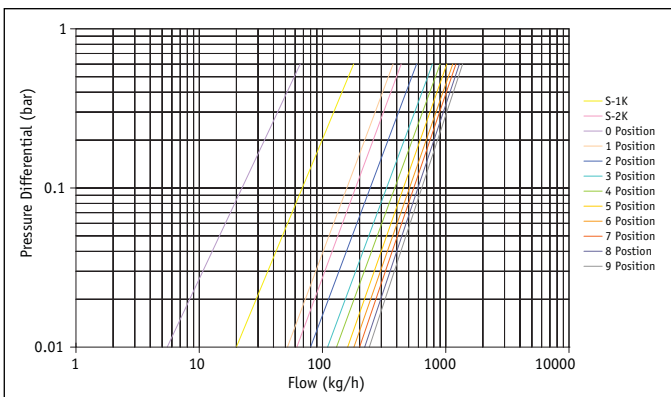


| Setting | Nominal flow (kg/h) | Seat authority a | Position | kv |
|---------|---------------------|------------------|----------|------|
| 0 | 44 | 0.00 | S-1K | 0.23 |
| 1 | 151 | 0.00 | S-2K | 0.56 |
| 2 | 206 | 0.32 | 0 | 0.09 |
| 3 | 206 | 0.63 | 1 | 0.48 |
| 4 | 206 | 0.73 | 2 | 0.75 |
| 5 | 206 | 0.80 | 3 | 1.01 |
| 6 | 206 | 0.85 | 4 | 1.16 |
| 7 | 206 | 0.89 | 5 | 1.32 |
| 8 | 206 | 0.91 | 6 | 1.47 |
| 9 | 206 | 0.94 | 7 | 1.56 |
| | | | 8 | 1.67 |
| | | | 9 | 1.77 |

1/2" straight pattern forward and reverse flow pre-setting

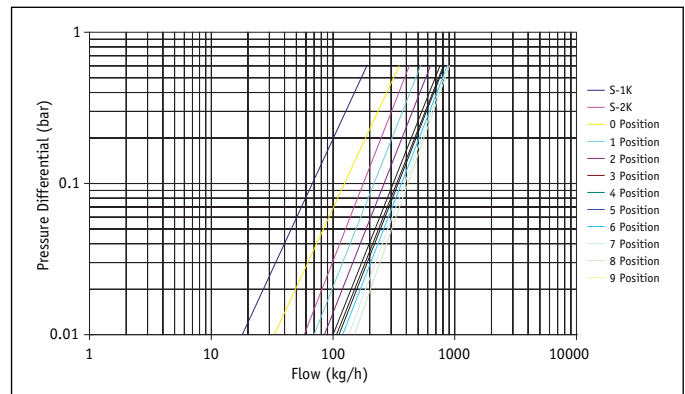


| Setting | Nominal flow (kg/h) | Seat authority a | Position | kv |
|---------|---------------------|------------------|----------|------|
| 0 | 40 | 0.00 | S-1K | 0.25 |
| 1 | 130 | 0.00 | S-2K | 0.55 |
| 2 | 195 | 0.22 | 0 | 0.45 |
| 3 | 195 | 0.43 | 1 | 0.68 |
| 4 | 195 | 0.62 | 2 | 0.82 |
| 5 | 195 | 0.69 | 3 | 0.98 |
| 6 | 195 | 0.78 | 4 | 1.04 |
| 7 | 195 | 0.80 | 5 | 1.06 |
| 8 | 195 | 0.81 | 6 | 1.12 |
| 9 | 195 | 0.82 | 7 | 1.14 |
| | | | 8 | 1.17 |
| | | | 9 | 1.20 |

3/4" angle and reverse angle pattern forward and reverse flow pre-setting

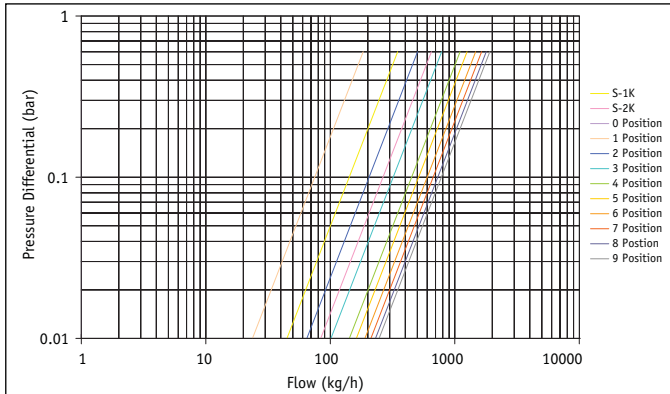


| Setting | Nominal flow (kg/h) | Seat authority a | Position | kv |
|---------|---------------------|------------------|----------|------|
| 0 | 0 | 0 | S-1K | 0.45 |
| 1 | 75 | 0 | S-2K | 0.84 |
| 2 | 205 | 0 | 0 | 0.00 |
| 3 | 265 | 0.31 | 1 | 0.24 |
| 4 | 265 | 0.65 | 2 | 0.65 |
| 5 | 265 | 0.73 | 3 | 1.01 |
| 6 | 265 | 0.80 | 4 | 1.42 |
| 7 | 265 | 0.84 | 5 | 1.62 |
| 8 | 265 | 0.87 | 6 | 1.90 |
| 9 | 265 | 0.88 | 7 | 2.12 |
| | | | 8 | 2.31 |
| | | | 9 | 2.47 |

3/4" straight pattern reverse flow pre-setting

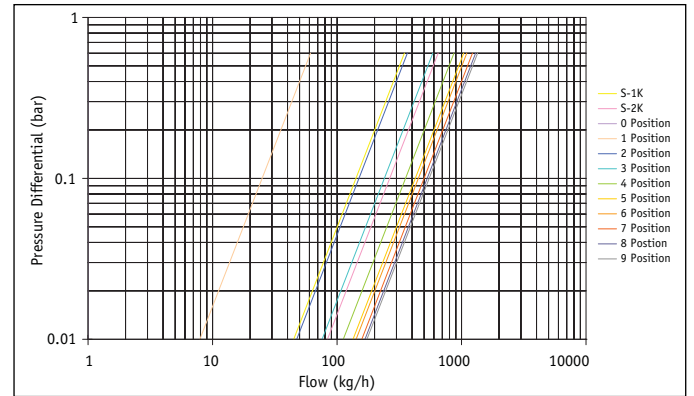

| Setting | Nominal flow (kg/h) | Seat authority a | Position | kv |
|---------|---------------------|------------------|----------|------|
| 0 | 0 | 0 | S-1K | 0.45 |
| 1 | 25 | 0 | S-2K | 0.84 |
| 2 | 150 | 0 | 0 | 0.00 |
| 3 | 240 | 0 | 1 | 0.08 |
| 4 | 265 | 0.44 | 2 | 0.47 |
| 5 | 265 | 0.61 | 3 | 0.76 |
| 6 | 265 | 0.65 | 4 | 1.12 |
| 7 | 265 | 0.72 | 5 | 1.34 |
| 8 | 265 | 0.75 | 6 | 1.42 |
| 9 | 265 | 0.77 | 7 | 1.58 |
| | | | 8 | 1.68 |
| | | | 9 | 1.74 |

3/4" straight pattern forward flow pre-setting

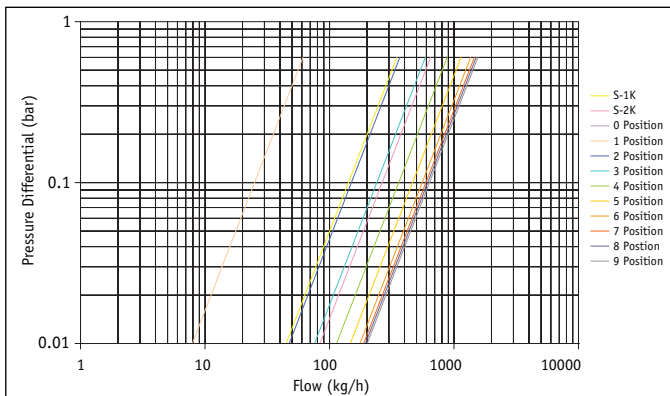


| Setting | Nominal flow (kg/h) | Seat authority a | Position | kv |
|---------|---------------------|------------------|----------|------|
| 0 | 0 | 0 | S-1K | 0.45 |
| 1 | 25 | 0 | S-2K | 0.84 |
| 2 | 150 | 0 | 0 | 0.00 |
| 3 | 240 | 0 | 1 | 0.08 |
| 4 | 265 | 0.46 | 2 | 0.76 |
| 5 | 265 | 0.68 | 3 | 1.14 |
| 6 | 265 | 0.77 | 4 | 1.47 |
| 7 | 265 | 0.80 | 5 | 1.76 |
| 8 | 265 | 0.81 | 6 | 1.88 |
| 9 | 265 | 0.83 | 7 | 1.94 |
| | | | 8 | 2.01 |
| | | | 9 | 2.01 |

Belmont manual radiator valves


Domestic circulating pumps

Manual handwheel and lockshield

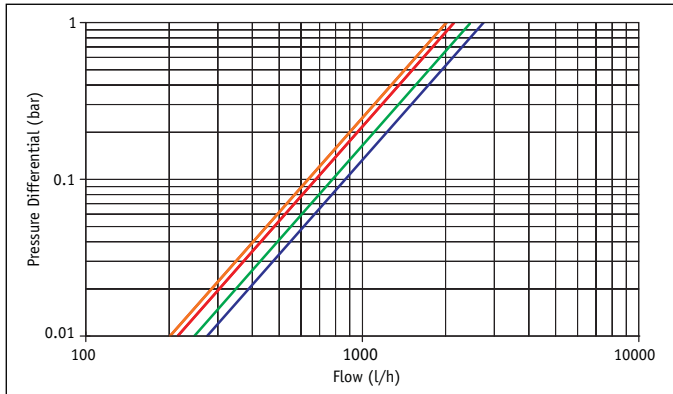


| | Pressure (bar) | Flow (l/h) | kv |
|-------------------------------|----------------|------------|------|
| Straight pattern forward flow | 0.01 | 214.8 | 2.15 |
| | 1 | 2148.0 | |
| Straight pattern reverse flow | 0.01 | 203.9 | 2.04 |
| | 1 | 2039.1 | |
| Angle pattern forward flow | 0.01 | 276.4 | 2.76 |
| | 1 | 2764.0 | |
| Angle pattern reverse flow | 0.01 | 258.4 | 2.58 |
| | 1 | 2584.3 | |

TC5 domestic circulating pump

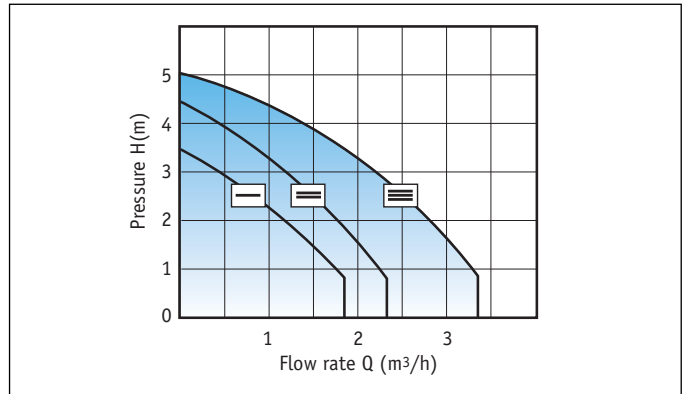


| Speed rating | Current (A) | Input (W) |
|--------------|-------------|-----------|
| — | 0.17 | 39 |
| == | 0.27 | 62 |
| === | 0.38 | 87 |

Concealed lockshield

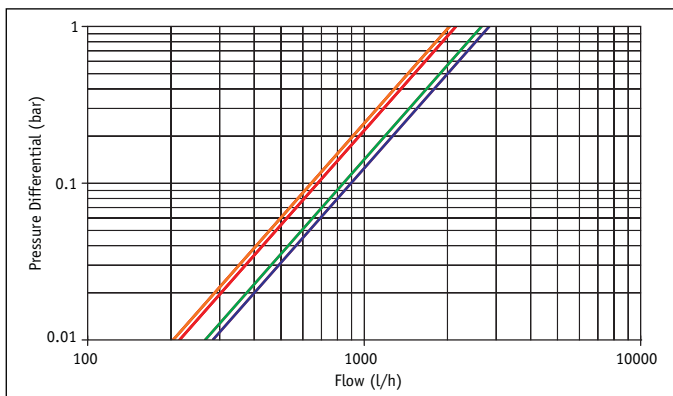



| | Pressure (bar) | Flow (l/h) | kv |
|-------------------------------|----------------|------------|------|
| Straight pattern forward flow | 0.01 | 213.1 | 2.13 |
| | 1 | 2130.9 | |
| Straight pattern reverse flow | 0.01 | 203.1 | 2.03 |
| | 1 | 2030.7 | |
| Angle pattern forward flow | 0.01 | 289.9 | 2.90 |
| | 1 | 2898.7 | |
| Angle pattern reverse flow | 0.01 | 267.8 | 2.68 |
| | 1 | 2678.0 | |

TC6 domestic circulating pump

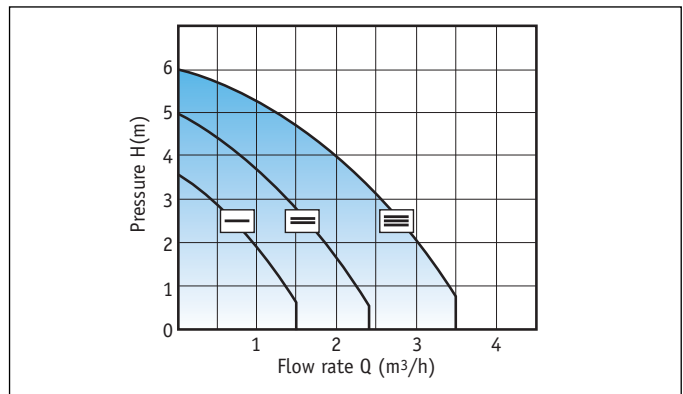

| Speed rating | Current (A) | Input (W) |
|--------------|-------------|-----------|
| — | 0.17 | 39 |
| == | 0.27 | 62 |
| === | 0.39 | 90 |

Automatic bypass valves

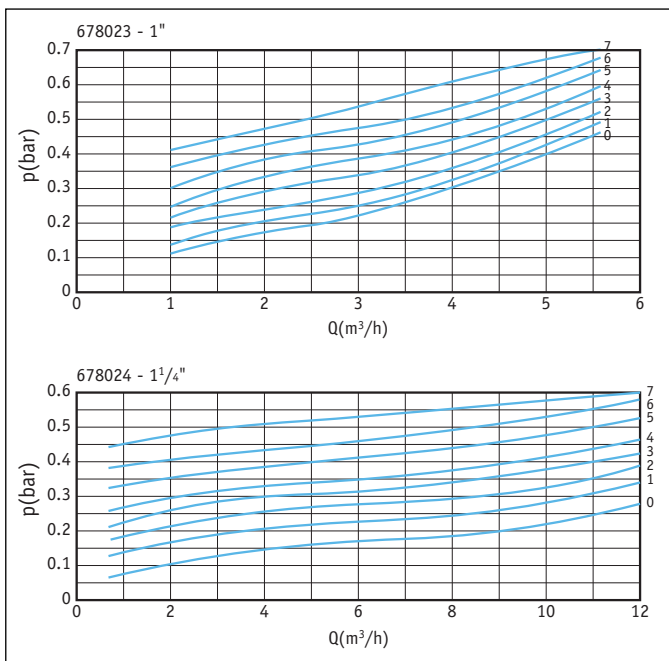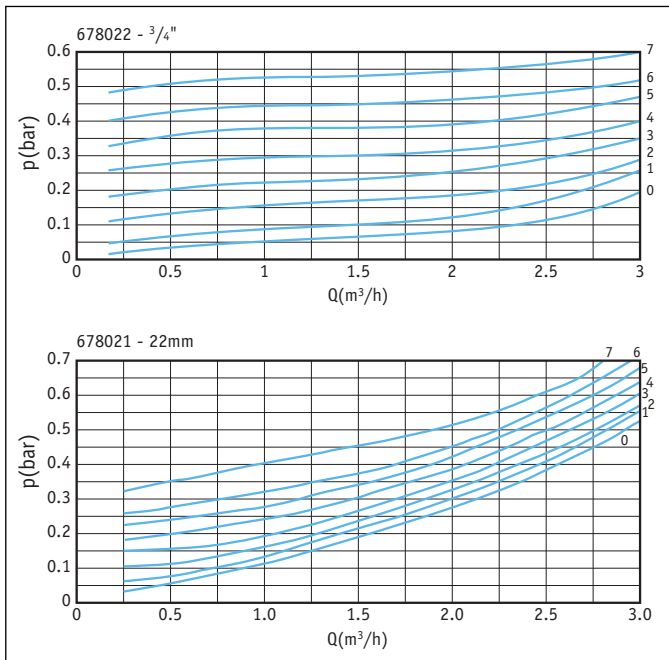

Motorised valves

| | |
|----------------------------|-------------------|
| Operating flow temperature | Up to 80°C |
| Switch rating | 5 Amp |
| Max ambient temperature | 50°C |
| Max static pressure | 21bar |
| Max differential pressure | 2bar |

Thermostatic radiator valves



Care

- The TRV can be easily cleaned with a soft damp cloth wiping over the handle (plastic) and valve body.

Maintenance

- No maintenance is required for this product
- When removing the TRV head for decorating or replacement purposes, turn the head setting to '5', this enables an easier removal
- A manual shut off cap is provided with the product to protect the valve whilst any surrounding maintenance work is undertaken.

Zone valves



Care

- This product does not require any regular aesthetic care.
- For any cleaning that may become necessary from time to time, please turn off the power.

Maintenance

- It is recommended that the valves and actuators should be checked during annual heating maintenance
- Disconnect the mains supply before commencing maintenance
- A 'switch' having a contact separation of at least 3mm in all poles must be incorporated in the fixed wiring as a means of disconnecting the mains supply. These valves are not suitable for the use on mains water supply. The valve and actuator should be in an easily accessible position for any possible maintenance.

Manual radiator valves



Care

- No regular aesthetic care is required for this product.

Maintenance

- No regular maintenance is required for this product.

Programmable

Care



- No regular cleaning is required
- Warning: Great care must be taken to avoid using water or water-based cleaning agent. A barely damp cloth should be used. The programmer can be

easily cleaned with a soft cloth wiping over the outer cover only. The programmer should be switched off before cleaning.

Maintenance

- Programmable units are fitted with a non-chargeable long life battery, which will sustain the pre-programmed time settings for a maximum of ten months if the supply is accidentally disconnected
- THIS SHOULD BE SUFFICIENT TO COVER POWER INTERRUPTIONS DURING THE LIFE OF THE UNIT. During power interruptions the display will be blank, and after 3 days the current time of day will be lost. These measures are to prolong the battery life
- The programmer is not user serviceable. Please do not dismantle the unit. In the unlikely event of a fault developing, please refer to the **RESETTING THE PROGRAMMER** section of this

Decorative radiator valves



Care

- To maintain the surface finish, simply wipe occasionally with a mild detergent on a soft damp cloth. Dry using a soft cloth
- Never use abrasive cleaners or chemical household cleaners and avoid contact with concentrated bleach.

Maintenance

- No maintenance is required for this product.

Thermostats



Care

- No regular care is required for this product
- No regular cleaning is required
- Warning: Great care must be taken to avoid using water or water based cleaning agent. A barely damp cloth should be used. The Thermostat can be easily cleaned with a soft cloth wiping over the outer cover only. The programmer should be switched off before cleaning.

Maintenance

- No maintenance is required for this product.

Automatic bypass valve



Care

- No regular cleaning is required for this product.

Maintenance

- When operated under the correct conditions the pressure reducing valve requires no special maintenance; however pressure reducing valves can

be affected by a foreign matter. We recommend that a separate filter can be fitted in line prior to the valve.

Domestic circulating pumps



Care

- No regular aesthetic care is required for this product.

Maintenance

- No periodic maintenance is necessary, as the pump is designed to be a sealed unit. If the pump has not been used for a while, it is advisable to check that the pump is free to rotate

by switching the pump on for short intervals every week or so

- Use of a suitable system cleanser or corrosion products will prolong the life of the pump
- Insert a small screwdriver into the end of the shaft and rotate in the direction of the arrow on the pump label to ensure it turns freely.



Pegler Yorkshire

Our brands:

terrier

HEATING SOLUTIONS

YORKSHIRE

SOLDER RING SOLUTIONS

Tectite

PUSH-FIT SOLUTIONS

XPress

PRESS-FIT SOLUTIONS

ENDEX

END FEED SOLUTIONS

KUTERLITE

COMPRESSION SOLUTIONS

PRESTEX

DOMESTIC VALVE SOLUTIONS

PEGLER

COMMERCIAL VALVE SOLUTIONS

meibes

SOLAR PUMP SOLUTIONS

PERFORMA

UTILITY TAP SOLUTIONS

francis
pegler

LUXURY TAP SOLUTIONS

UK sales

Free Phone: 0800 156 0010

Free Fax: 0808 156 1011

Email: uk.sales@pegleryorkshire.co.uk

Export

Tel: +44 (0) 1302 855 656

Fax: +44 (0) 1302 730 513

Email: export@pegleryorkshire.co.uk

Technical Help

Free Phone: 0800 156 0050

Free Fax: 0808 156 1012

Email: tech.help@pegleryorkshire.co.uk

Brochure Hotline

Free Phone: 0800 156 0020

Free Fax: 0808 156 1011

Email: info@pegleryorkshire.co.uk

www.pegleryorkshire.co.uk

Pegler Yorkshire Group Limited

St. Catherine's Avenue, Doncaster,
South Yorkshire, DN4 8DF, England.

Tel: 0844 243 4400 Fax: 0844 243 9870

Registered in England Company No. 00401507

Registered Office: Haigh Park Road, Stourton, Leeds,
West Yorkshire, LS10 1RT, England.

All brand names and logo styles are registered trademarks.
Maintaining a policy of continual product development,
Pegler Yorkshire reserves the right to change specifications, design
and materials of products listed in this publication without prior notice.

LIT.REF: 880143.09.09