

CERAMIC PEBBLE FUEL EFFECT INSTALLER AND OWNER GUIDE

THIS GUIDE IS FOR FITTING THE
12 PEBBLE CERAMIC FUEL EFFECT TO
CLASS 1 MODELS ONLY.
(Ceramic set number 5122556)

IMPORTANT

THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED TO THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE. IT MUST BE LEFT WITH THE OWNER.

THIS GUIDE MUST BE READ IN CONJUNCTION WITH THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE.

INSTALLER AND OWNER GUIDE

© Baxi Heating U.K. Limited 2007.

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying), stored in any medium by electronic means (including in any retrieval system or database) or transmitted, in any form or by any means, whether electronic, mechanical, recording or otherwise, without the prior written permission of the copyright owner.

Applications for the copyright owner's permission to reproduce any part of this publication should be made, giving details of the proposed use, to the following address: The Company Secretary, Baxi Heating UK Limited, The Wyvern Business Park, Stanier Way, Derby, DE21

Warning: Any person who does any unauthorised act in relation to a copyright work may be liable to criminal prosecution and civil claims for damages.

Because our policy is one of constant development and improvement, details may vary slightly from those given in this publication

SAFETY

This product uses fuel effect pieces (and burner compartment walls*) containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.

This appliance does not contain any component manufactured from asbestos or asbestos related products.

* Only on models with a convector box.

INSTALLER AND OWNER GUIDE

FITTING THE CERAMIC PEBBLE FUEL EFFECT

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

Note: Depending upon model the detail around the ceramic fuel effect may be different to that shown.

1 .Place the ceramic pebble base behind the main burner. On DGF models the bottom rear face of the pebble base should rest on the metal support at the rear of the burner tray. On convector box or hotbox models the bottom rear face of the pebble base

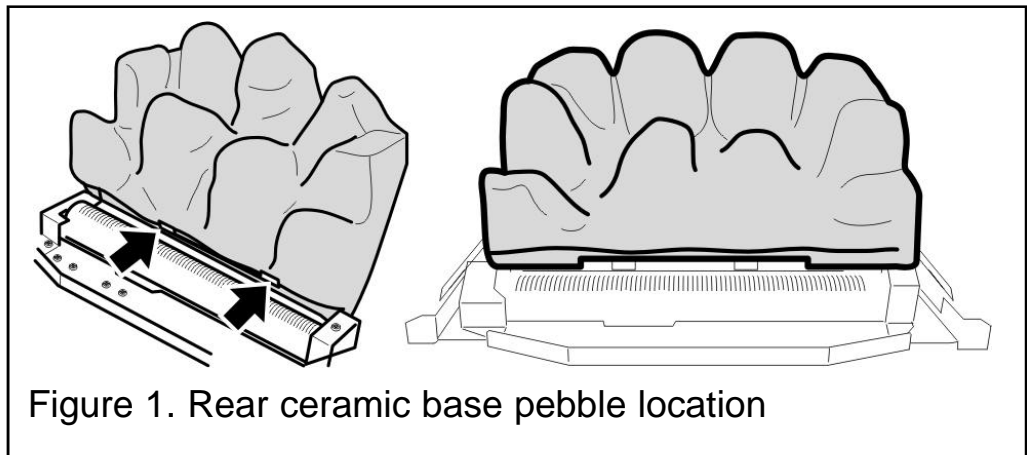


Figure 1. Rear ceramic base pebble location

should rest on the metal supports at the rear of the convector / hot box. The bottom front recess edge on the pebble base should locate against the tags at the front of the ceramic support (See figure 1).

2. Place the right-hand ceramic front pebbles in position in front of the base pebble. The front of the ceramic pebbles should touch the front of the burner module (See figure 2).

3. Place the left hand ceramic front pebbles in position in front of the base pebbles. This should join with the right-hand pebbles. Push the two sides together to minimise the gap. The front of the ceramic pebbles should touch the front of the burner module (See figure 2).

4. There will be a gap between the rear of the front pebbles and the front of the base pebbles (See figure 2).

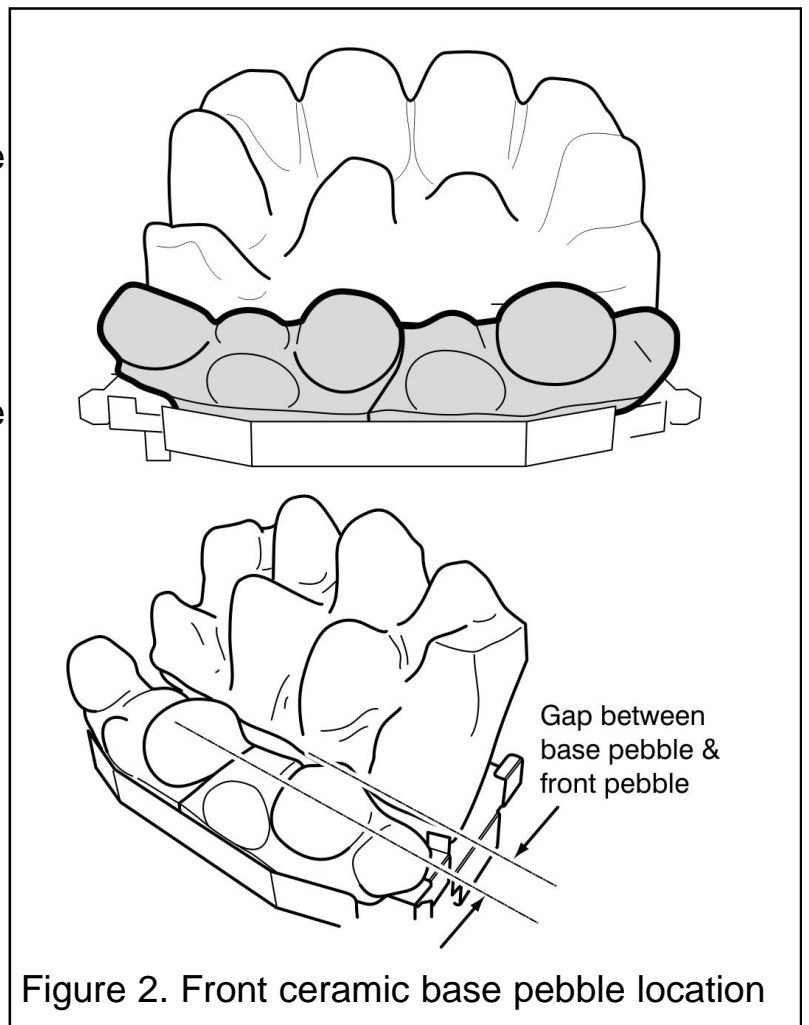


Figure 2. Front ceramic base pebble location

INSTALLER AND OWNER GUIDE

Install the 12 loose pebbles as follows. The underside of each pebble is marked with a number '1' to '12' and an arrow.

The pebbles should be positioned so that the arrows always point towards the back of the fireplace opening. When located into position the stem of each arrow should be at 90° to the rear of the fireplace opening (See figure 3).

5. Hold pebble '1' upright with the arrow pointing to the top. Locate pebble '1' as shown in figure 3. It should lie on top of the left hand front pebbles allowing a gap to its right. This is to ensure that the pilot flame is visible to the customer.

6. Hold Pebble '2' upright with the arrow pointing to the top. Locate Pebble '2' as shown in figure 4. It should lie on top of the right hand front pebbles.

This will complete the front row of pebbles.

Locate pebbles '3' to '7' so that they are firmly seated in the valleys in the pebble base and front pebbles.

7. Hold pebble '3' upright with the arrow pointing to the top. Locate pebble '3' as shown in figure 5.

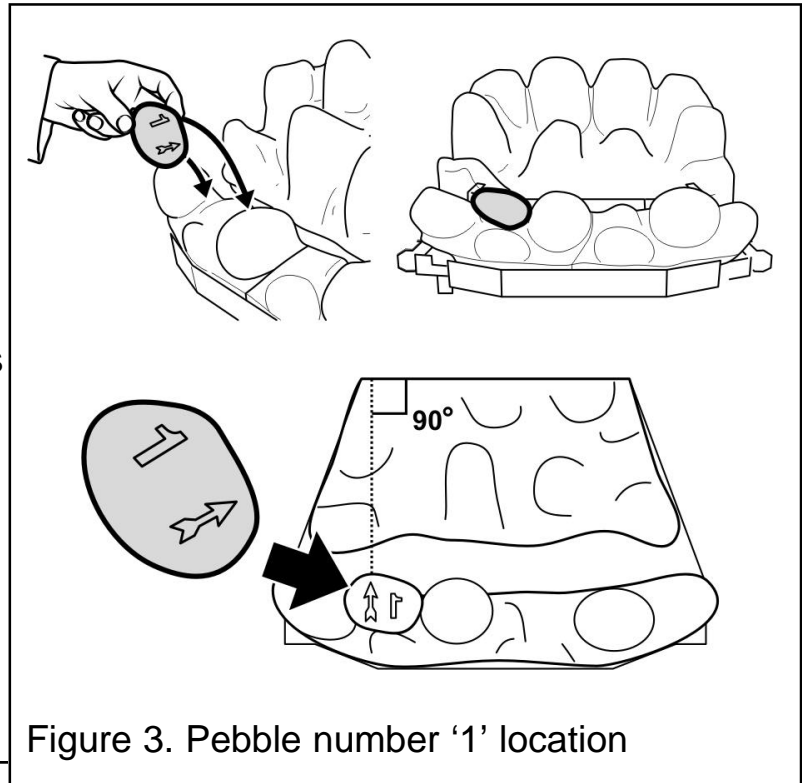


Figure 3. Pebble number '1' location

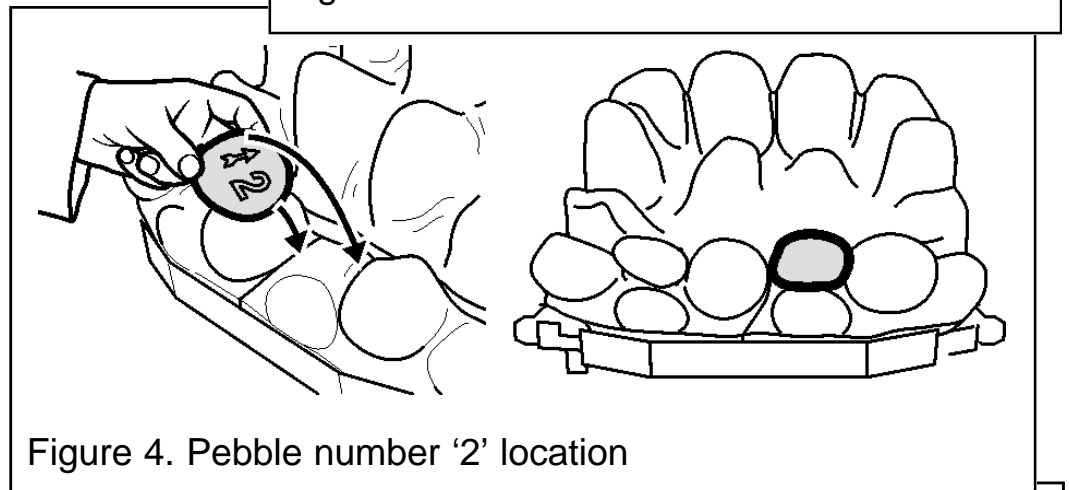


Figure 4. Pebble number '2' location


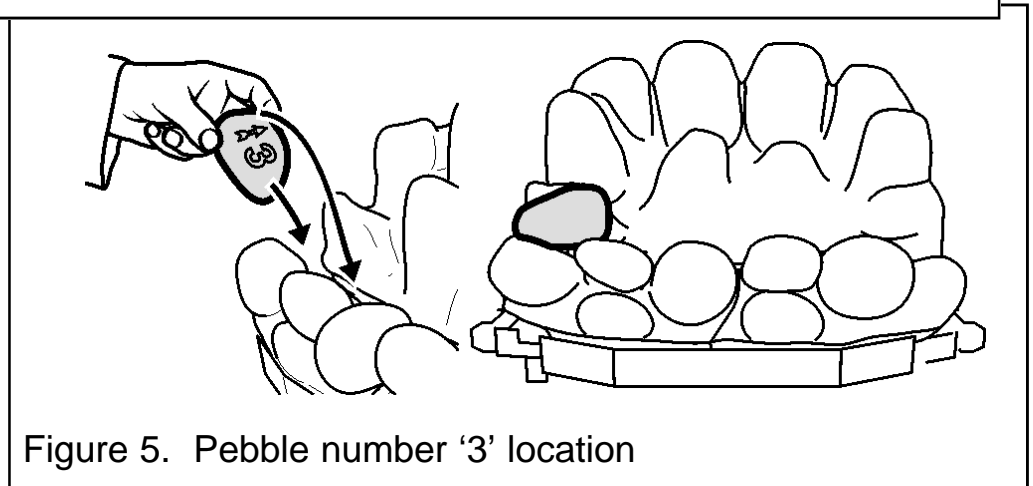



Figure 5. Pebble number '3' location

INSTALLER AND OWNER GUIDE


8. Hold pebble '4' upright with the arrow pointing to the top. Locate pebble '4' as shown in figure 6.

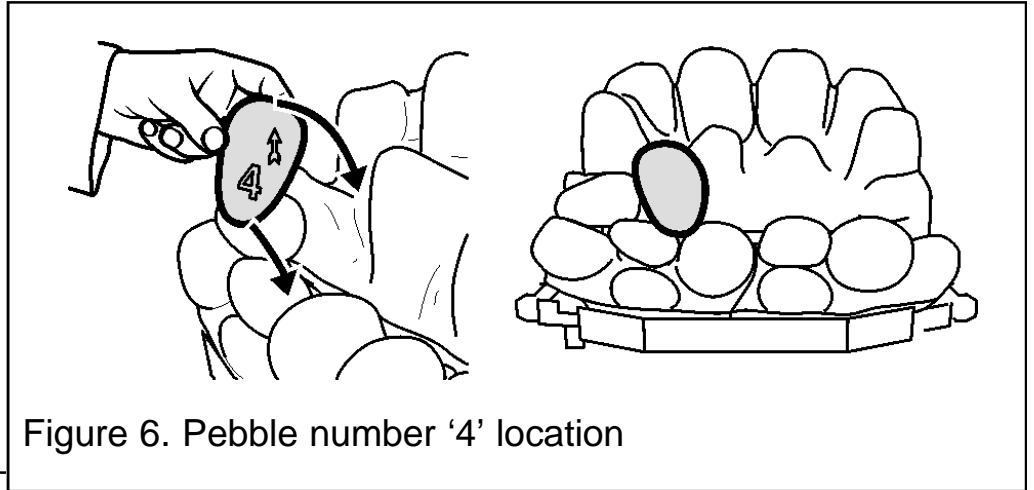

9. Hold pebble '5' upright with the arrow pointing to the top. Locate pebble '5' as shown in figure 7.

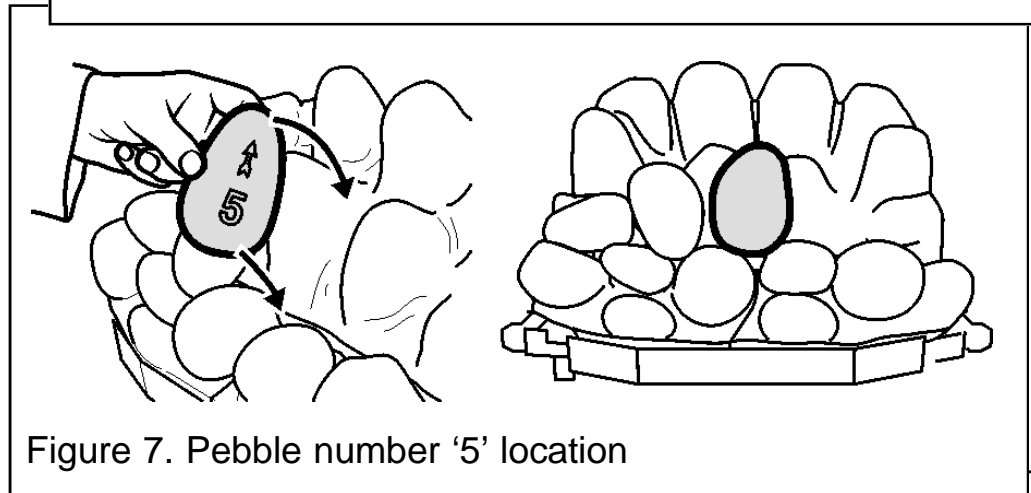


10. Hold pebble '6' upright with the arrow pointing to the top. Locate pebble '6' as shown in figure 8.

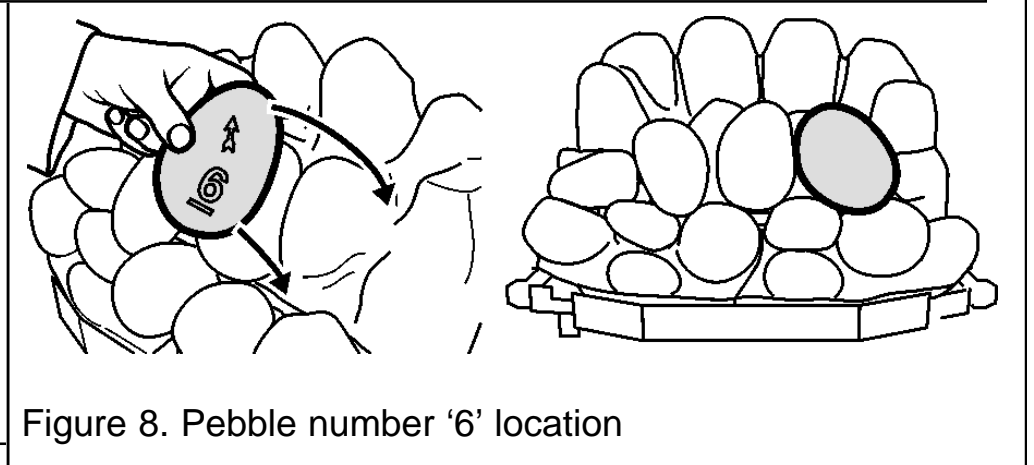

11. Hold pebble '7' upright with the arrow pointing to the top. Locate pebble '7' as shown in figure 9.


This will complete the second row of loose pebbles.

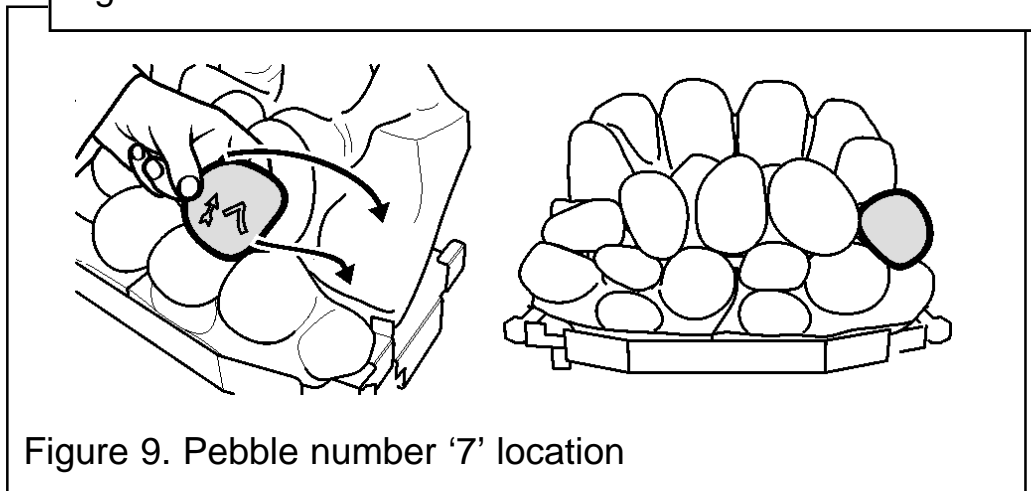


INSTALLER AND OWNER GUIDE

Locate pebbles '8' to '12' so that they are firmly seated in the valleys in the pebble base.


12. Hold pebble '8' upright with the arrow pointing to the top. Locate pebble '8' as shown in figure 10. The right hand end of pebble '8' should touch the upright pebble on the rear base pebble.

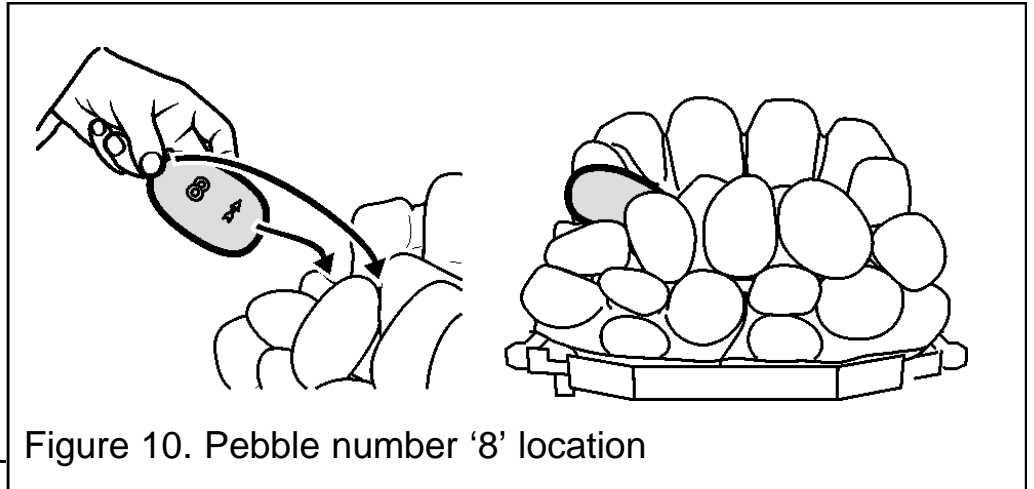


Hold pebble '9' upright with the arrow pointing to the top. Locate pebble '9' as shown in figure 11.

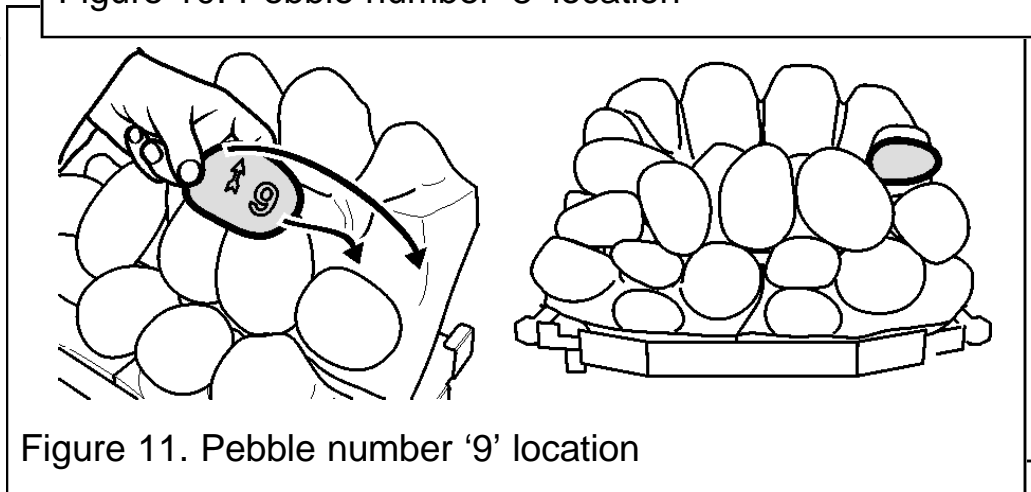

13. Hold pebble '10' upright with the arrow pointing to the top. Locate the pebble '10' as shown in figure 12.

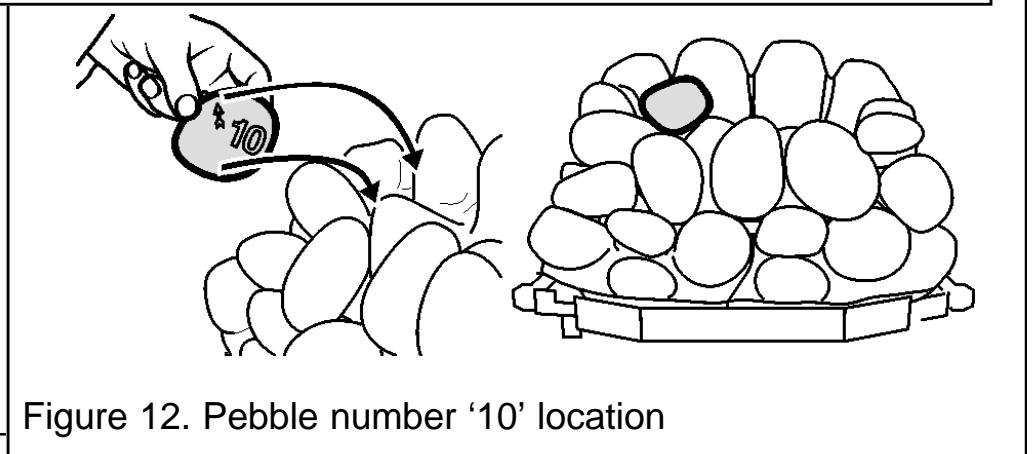

14. Hold pebble '11' upright with the pebble pointing to the top. Locate the pebble '11' as shown in figure 13.

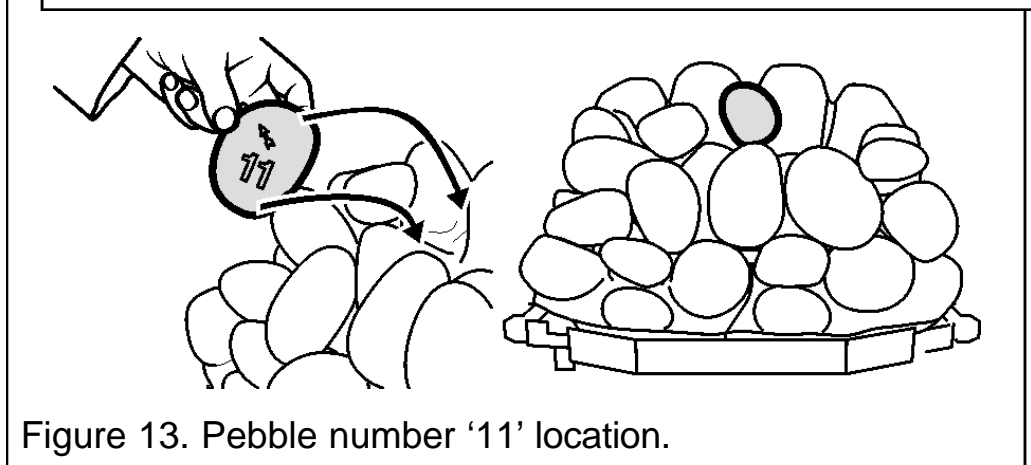

INSTALLER AND OWNER GUIDE

15. Hold pebble '12' upright with the pebble pointing to the top. Locate the pebble '12' as shown in figure 14.

