

# **CERAMIC LOG FUEL EFFECT INSTALLER AND OWNER GUIDE**

**THIS GUIDE IS FOR FITTING THE CERAMIC**

**LOG FUEL EFFECT TO THE**

**762**

**MODEL ONLY.**

## **IMPORTANT**

**THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED TO THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE. IT MUST BE LEFT WITH THE OWNER.**

**THIS GUIDE MUST BE READ IN CONJUNCTION WITH THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE.**

# INSTALLER AND OWNER GUIDE

© Baxi Heating U.K. Limited 2009.

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying), stored in any medium by electronic means (including in any retrieval system or database) or transmitted, in any form or by any means, whether electronic, mechanical, recording or otherwise, without the prior written permission of the copyright owner.

Applications for the copyright owner's permission to reproduce any part of this publication should be made, giving details of the proposed use, to the following address: The Company Secretary, Baxi Heating UK Limited, The Wyvern Business Park, Stanier Way, Derby, DE21 6BF.

Warning: Any person who does any unauthorised act in relation to a copyright work may be liable to criminal prosecution and civil claims for damages.

Valor Fires, Erdington, Birmingham B24 9QP

Because our policy is one of constant development and improvement, details may vary slightly from those given in this publication

## SAFETY

**This product uses fuel effect pieces, burner compartment walls and ash effect containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking. This appliance does not contain any component manufactured from asbestos or asbestos related products.**


# INSTALLER AND OWNER GUIDE

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

The ceramic logs are identified on the underside with the letters A - F. The ceramic walls that line the convection box may differ in design from those shown in this guide.

Carefully unpack the ceramic fuel effect.

**1.** Supplied with the heater is a gravel tray. Open the bag of gravel and pour this into the tray. The gravel should be level across the tray. Carefully lift the tray of gravel and place it as in figure 1 ensuring that no gravel drops onto the burner. It is important that the front of the tray sits immediately behind the burner tray front (See figure 1).

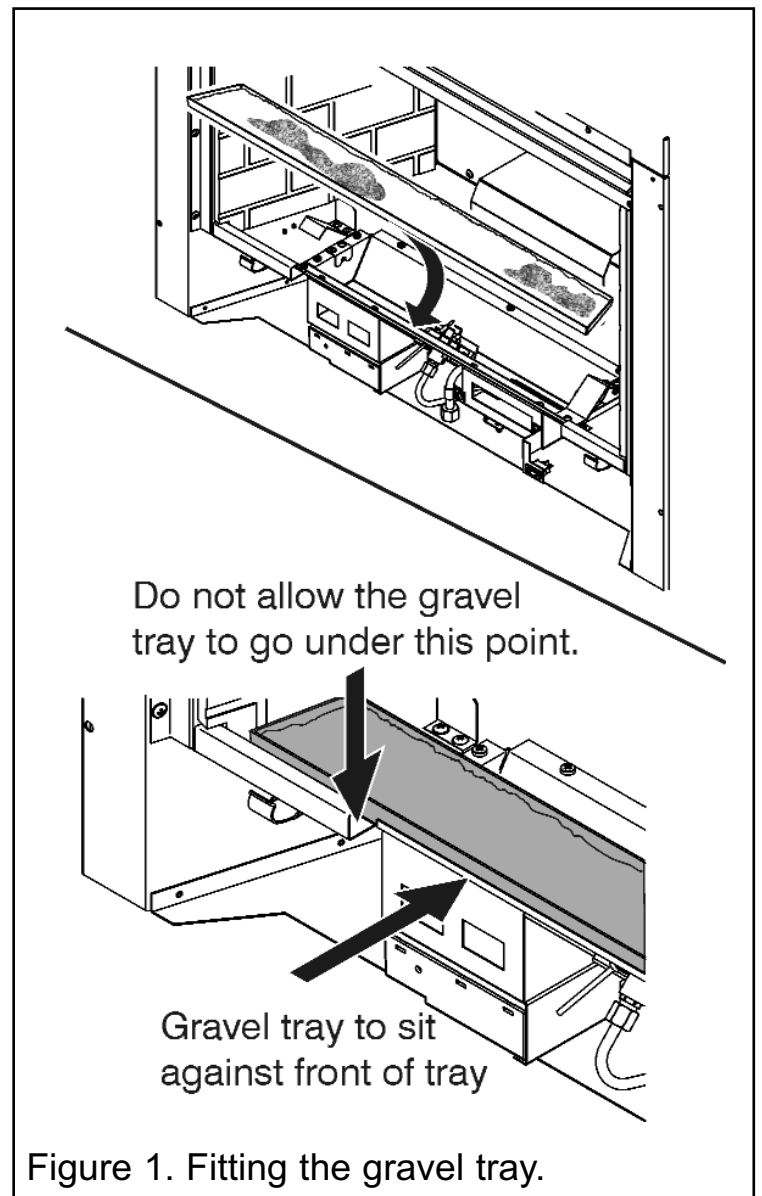

# INSTALLER AND OWNER GUIDE

2. Remove the rear base from its protective packaging and position it on top of the burner as shown in figure 2. Place the rear base ceramic at the rear of the burner tray and slide forward until the cut-outs in the base locate against the brackets behind the burner.

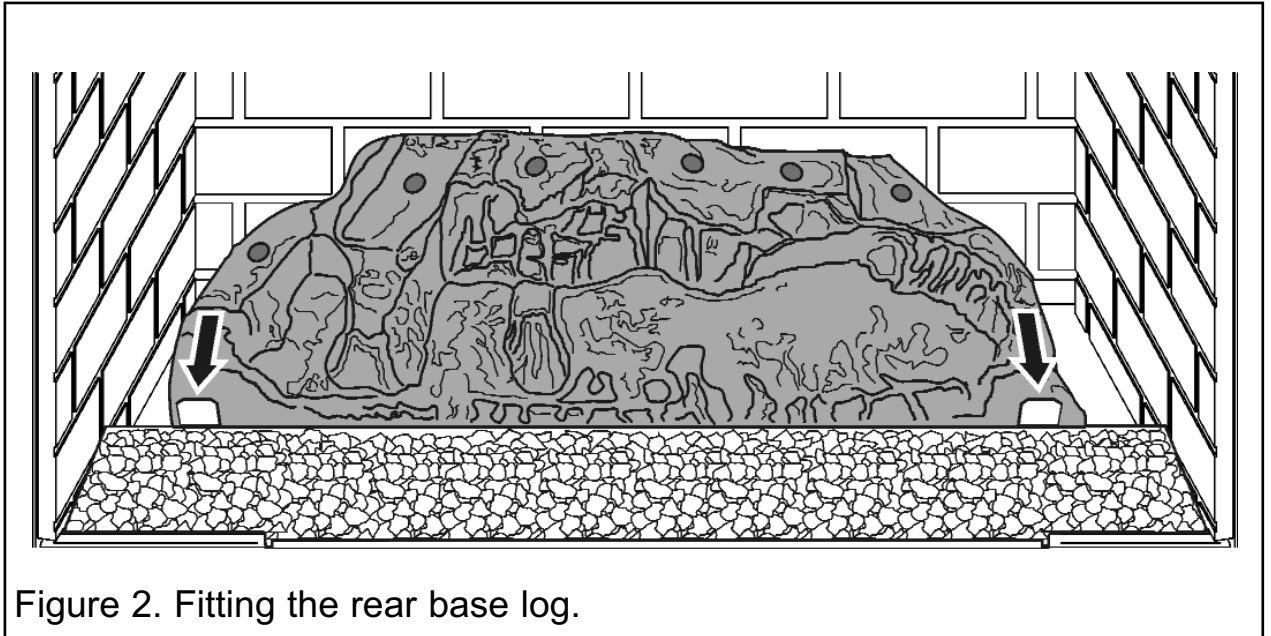


Figure 2. Fitting the rear base log.

3. Supplied with the fuel effect are six ceramic pegs. Locate these into the holes in the fuel effect base as in figure 3.

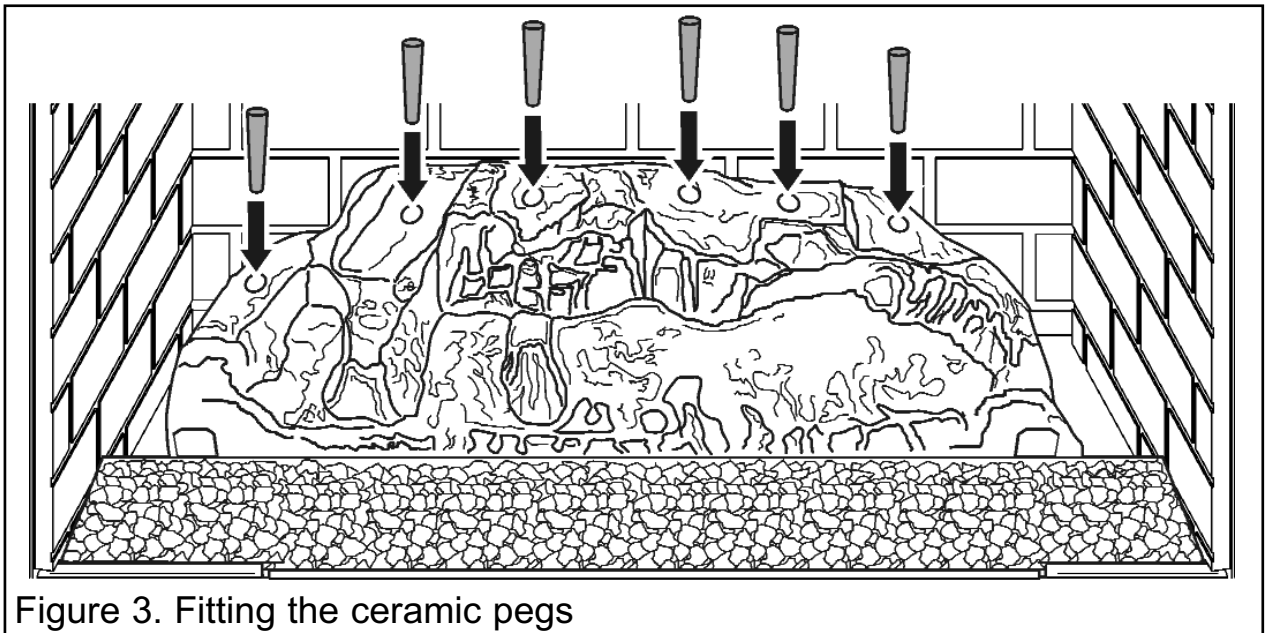


Figure 3. Fitting the ceramic pegs

# INSTALLER AND OWNER GUIDE

4. Remove log 'A' from its protective packaging and position it as shown in figure 4. Locate the hole in the base of log 'A' onto the peg on top of the rear base. The bottom left side of the log should lie against the ceramic side wall.

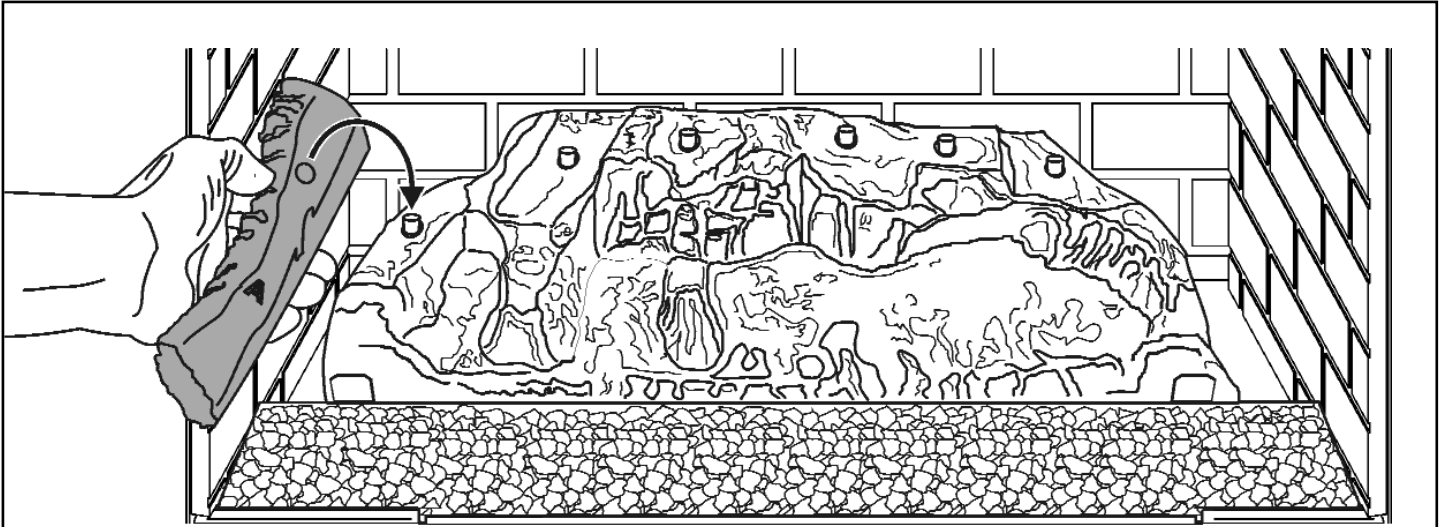


Figure 4. Fitting log 'A'.

5. Remove log 'B' from its protective packaging and position it as shown in figure 5. Locate the hole in the base of log 'B' onto the peg on top of the rear base.

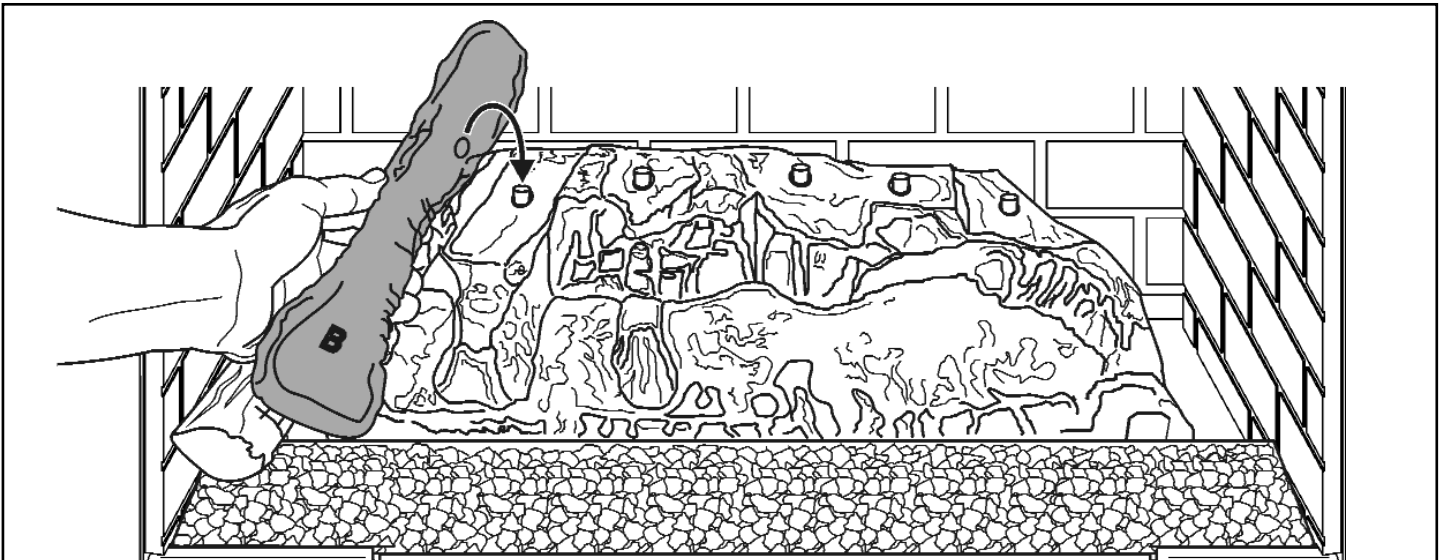


Figure 5. Fitting log 'B'

# INSTALLER AND OWNER GUIDE

6. Remove log 'C' from its protective packaging and position it as shown in figure 6. Locate the hole in the base of log 'C' onto the peg on top of the rear base.

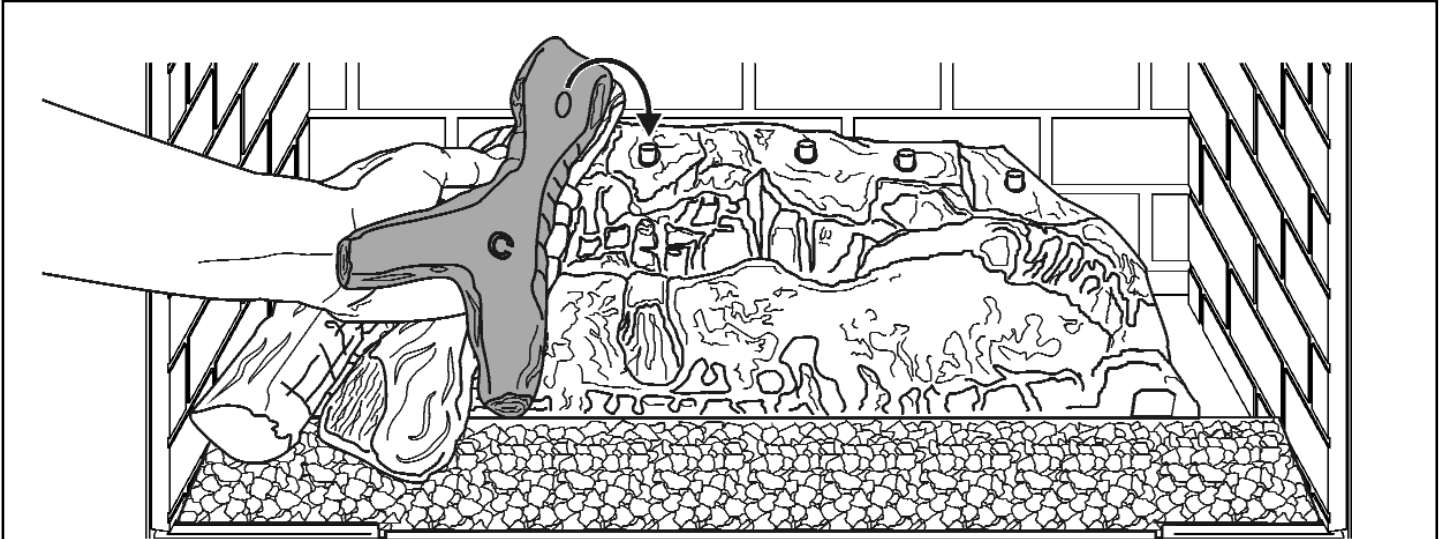


Figure 6. Fitting log 'C'

7. Remove log 'D' from its protective packaging and position it as shown in figure 7. Locate the hole in the base of log 'D' onto the peg on top of the rear base.

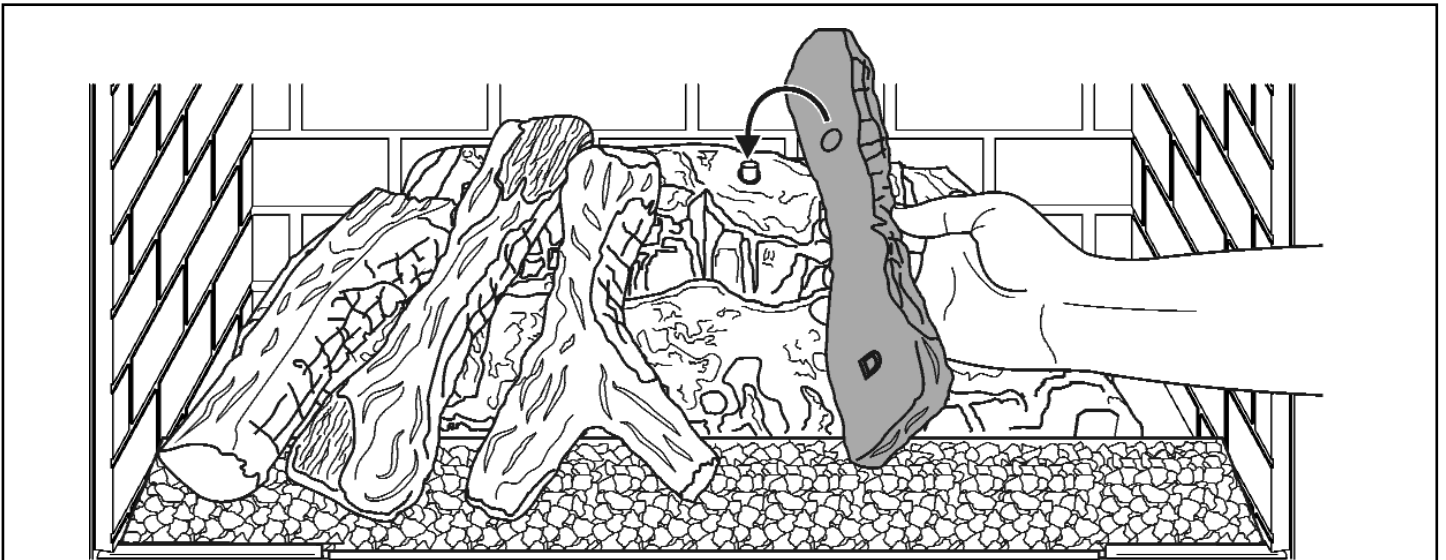


Figure 7. Fitting log 'D'

# INSTALLER AND OWNER GUIDE

8. Remove log 'E' from its protective packaging and position it as shown in figure 8. Locate the hole in the base of log 'E' onto the peg on top of the rear base.

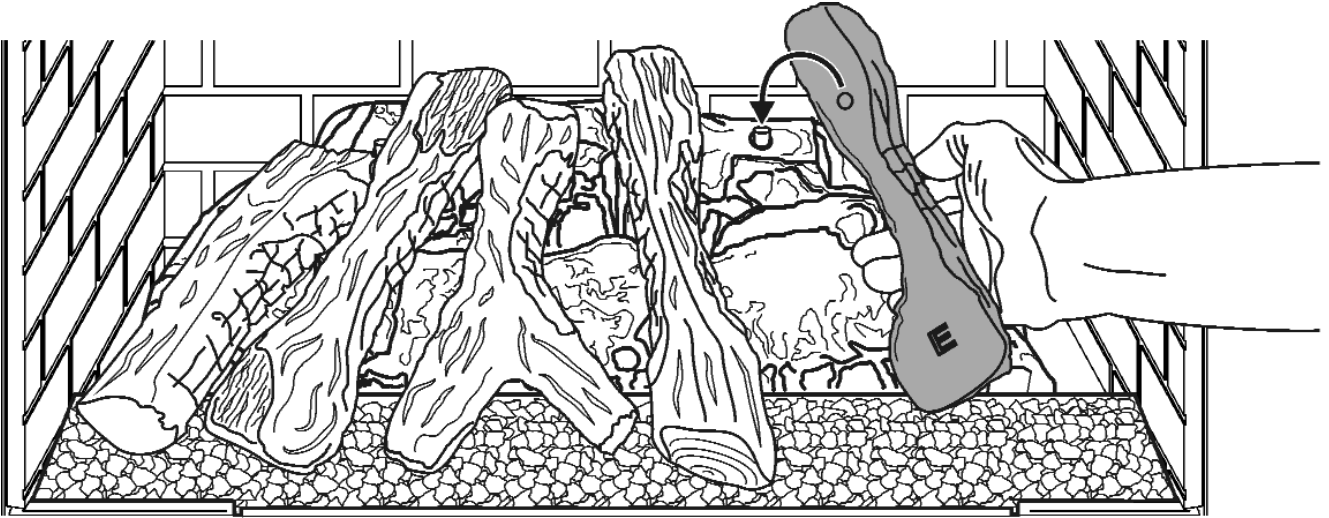


Figure 8. Fitting log 'E'

9. Remove log 'F' from its protective packaging and position it as shown in figure 9. Locate the hole in the base of log 'F' onto the peg on top of the rear base. The bottom right side of the log should lie against the ceramic side wall.

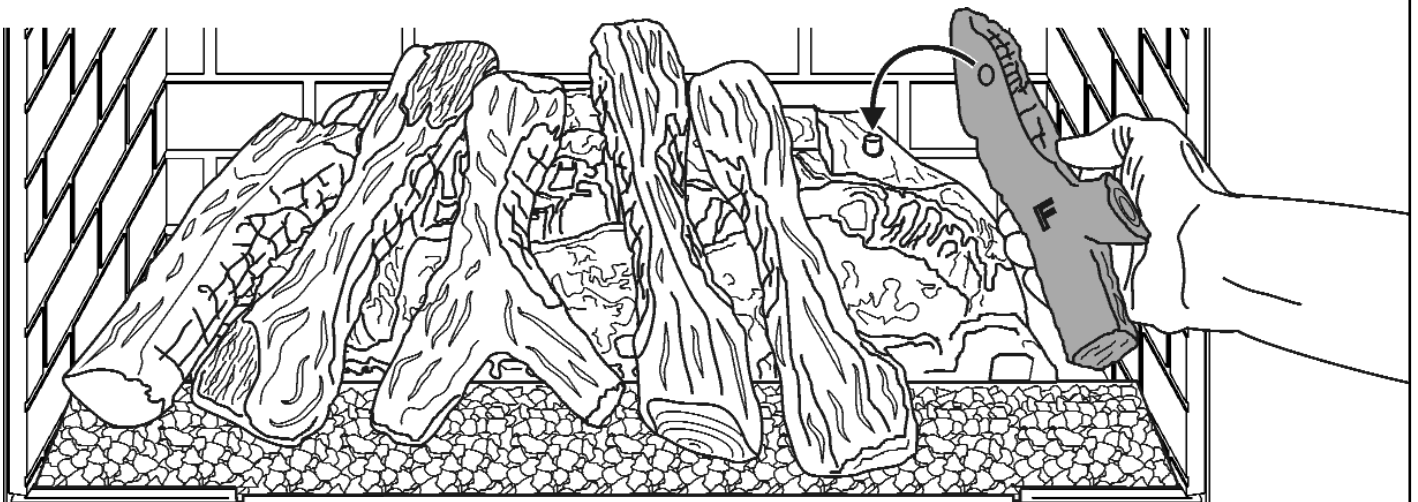


Figure 9. Fitting log 'F'

# INSTALLER AND OWNER GUIDE

10. The complete ceramic set should be as below.

