

CERAMIC LOG FUEL EFFECT INSTALLER AND OWNER GUIDE

THIS GUIDE IS FOR FITTING THE CERAMIC

LOG FUEL EFFECT TO THE

762

MODEL ONLY.

IMPORTANT

THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED TO THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE. IT MUST BE LEFT WITH THE OWNER.

THIS GUIDE MUST BE READ IN CONJUNCTION WITH THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE.

INSTALLER AND OWNER GUIDE

© Baxi Heating U.K. Limited 2007.

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying), stored in any medium by electronic means (including in any retrieval system or database) or transmitted, in any form or by any means, whether electronic, mechanical, recording or otherwise, without the prior written permission of the copyright owner.

Applications for the copyright owner's permission to reproduce any part of this publication should be made, giving details of the proposed use, to the following address: The Company Secretary, Baxi Heating UK Limited, The Wyvern Business Park, Stanier Way, Derby, DE21 6BF.

Warning: Any person who does any unauthorised act in relation to a copyright work may be liable to criminal prosecution and civil claims for damages.

Valor Fires, Erdington, Birmingham B24 9QP

Because our policy is one of constant development and improvement, details may vary slightly from those given in this publication

SAFETY

This product uses fuel effect pieces, burner compartment walls and ash effect containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.


This appliance does not contain any component manufactured from asbestos or asbestos related products.

INSTALLER AND OWNER GUIDE


The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

The ceramic logs are identified on the underside with the letters A- I.

1. Remove the rear base 'A' from its protective packaging and position it on top of the burner as shown in figure 1. Place the rear base ceramic at the rear of the burner tray and slide forward until the cut-outs in the base locate against the brackets behind the burner.

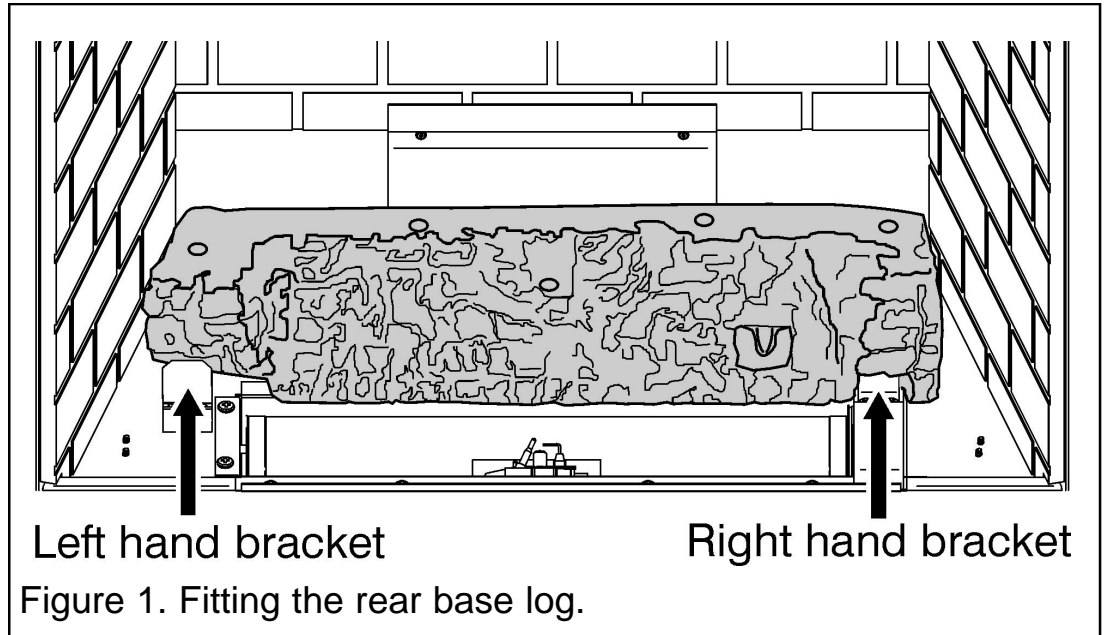


2. Remove the front base log 'B' from its protective packaging. The underside of the front base log has two cut-outs. Locate the cut-outs to the brackets in front of the burner as in figure 2. When located correctly this will prevent the front log from moving to either side.

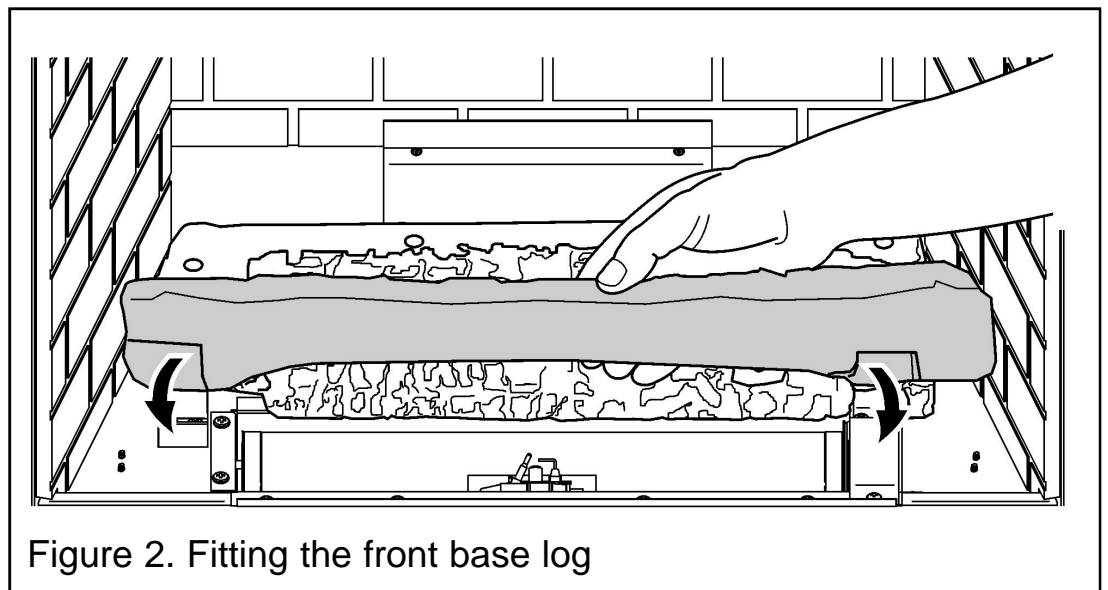


INSTALLER AND OWNER GUIDE

3. Supplied with the fuel effect are ten ceramic pegs. Drop seven of these into the holes in the fuel effect base as in figure 3.

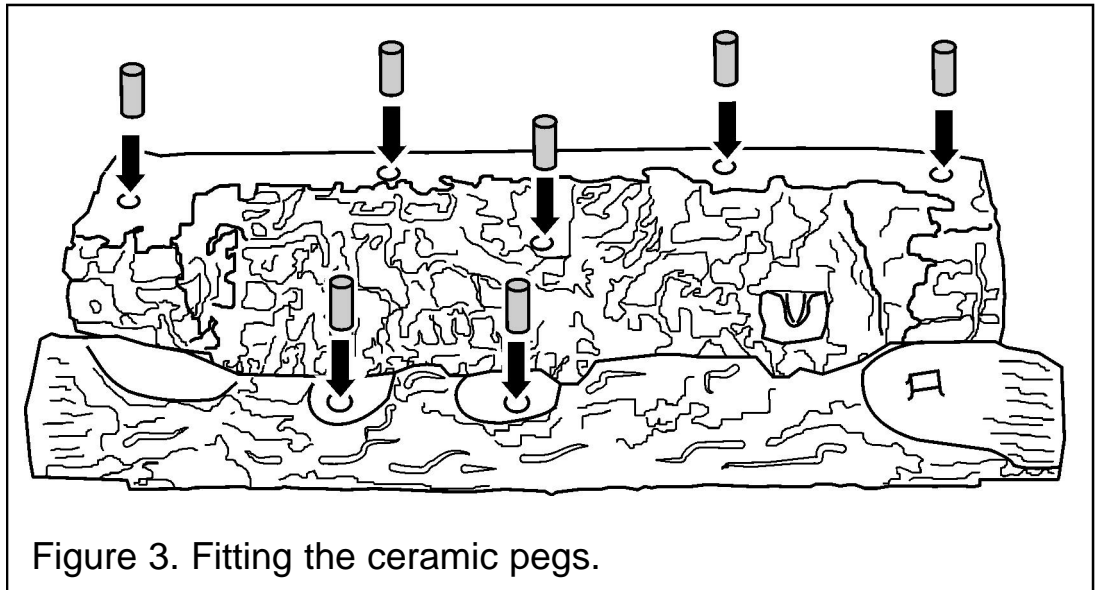

4. Remove log 'C' from its protective packaging and position it as shown in figure 4. Locate the holes in the base of log 'C' onto the pegs on top of the rear base log.

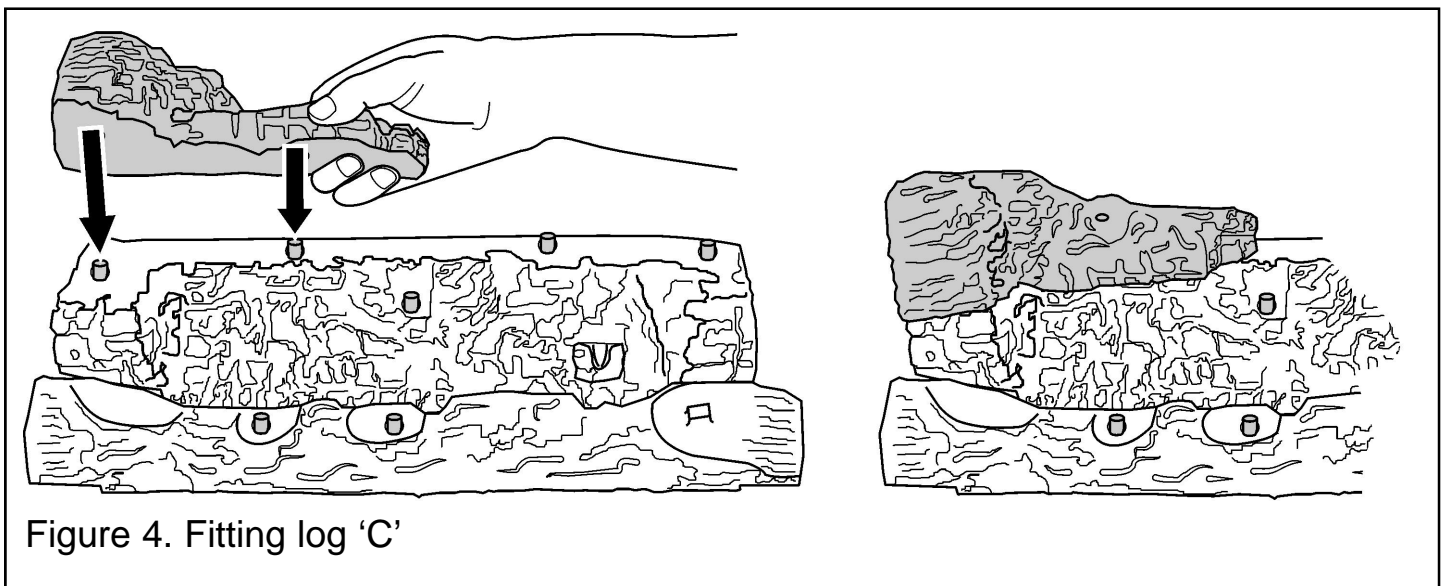

INSTALLER AND OWNER GUIDE

5. Remove log 'D' from its protective packaging and position it as shown in figure 5. Locate the holes in the base of log 'D' onto the pegs on top of the rear base log.

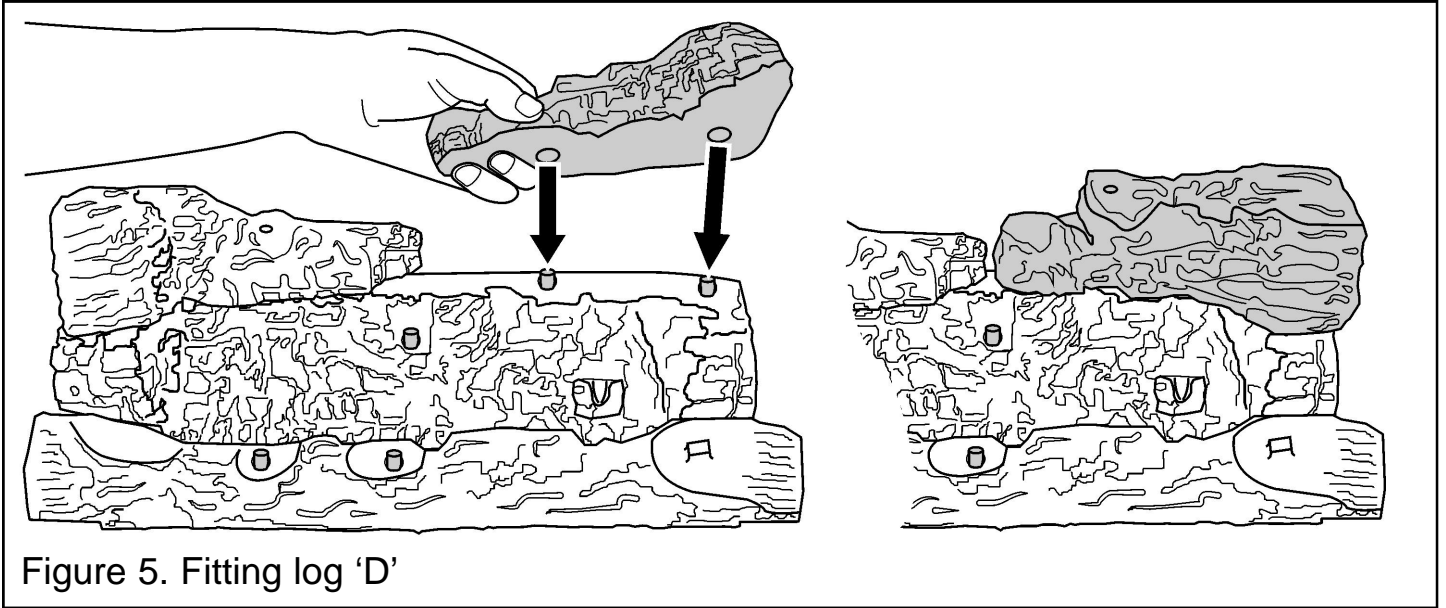


Figure 5. Fitting log 'D'

6. Locate the remaining three ceramic pegs into the holes in the top of logs 'C' and 'D'. See figure 6.


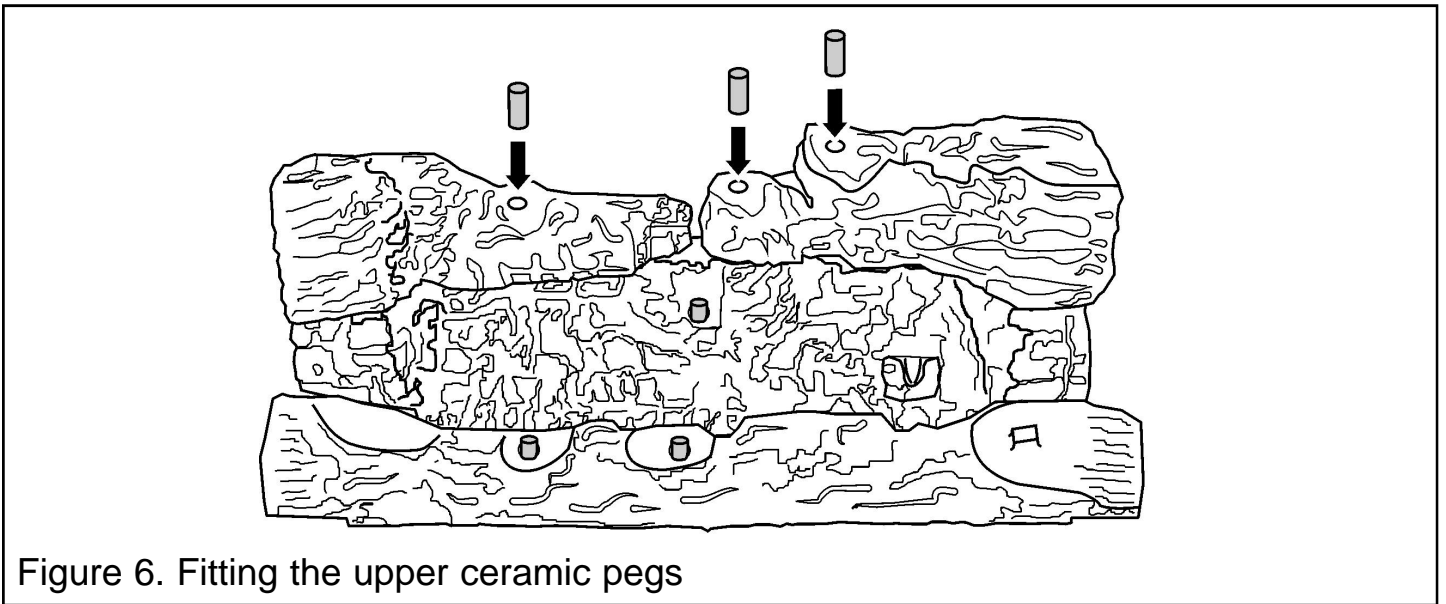



Figure 6. Fitting the upper ceramic pegs

INSTALLER AND OWNER GUIDE

7. Remove log 'E' from its protective packaging and position it as shown in figure 7. Locate the hole in the base of log 'E' onto the peg on top of log 'C'. The opposite end should lie on the smooth area on the top left of the front base log.

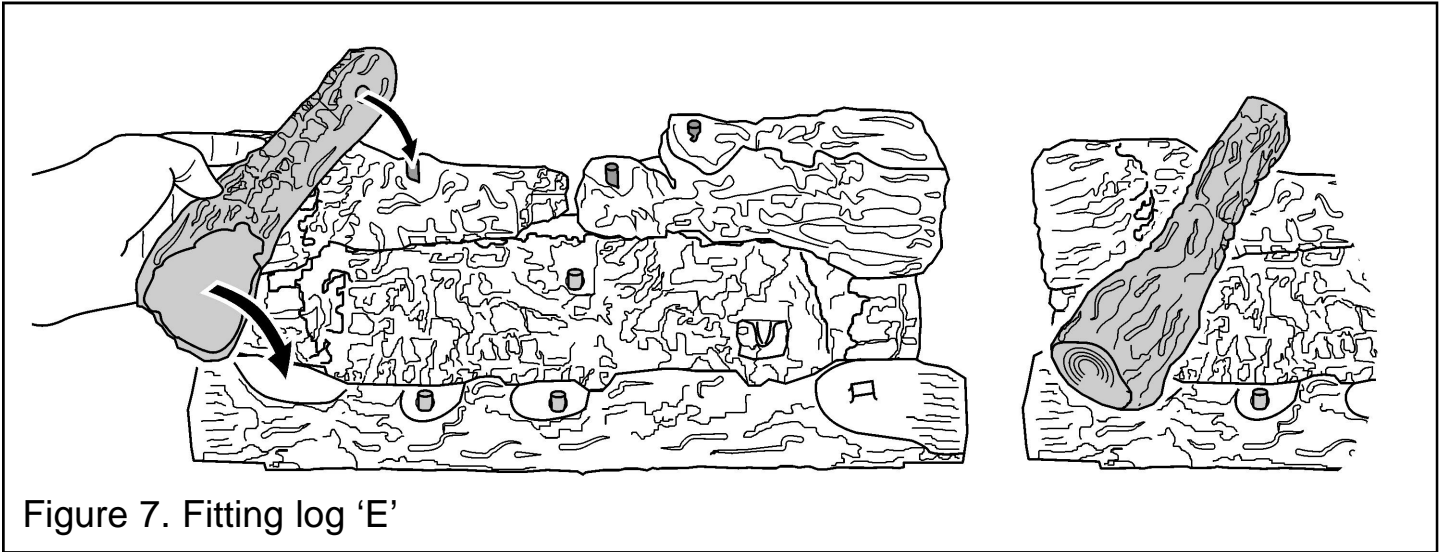


8. Remove log 'F' from its protective packaging and position it as shown in figure 8. Locate the hole in the base of log 'F' onto the peg on top of the front base log. The opposite end should lie immediately next to and touching log 'E'.

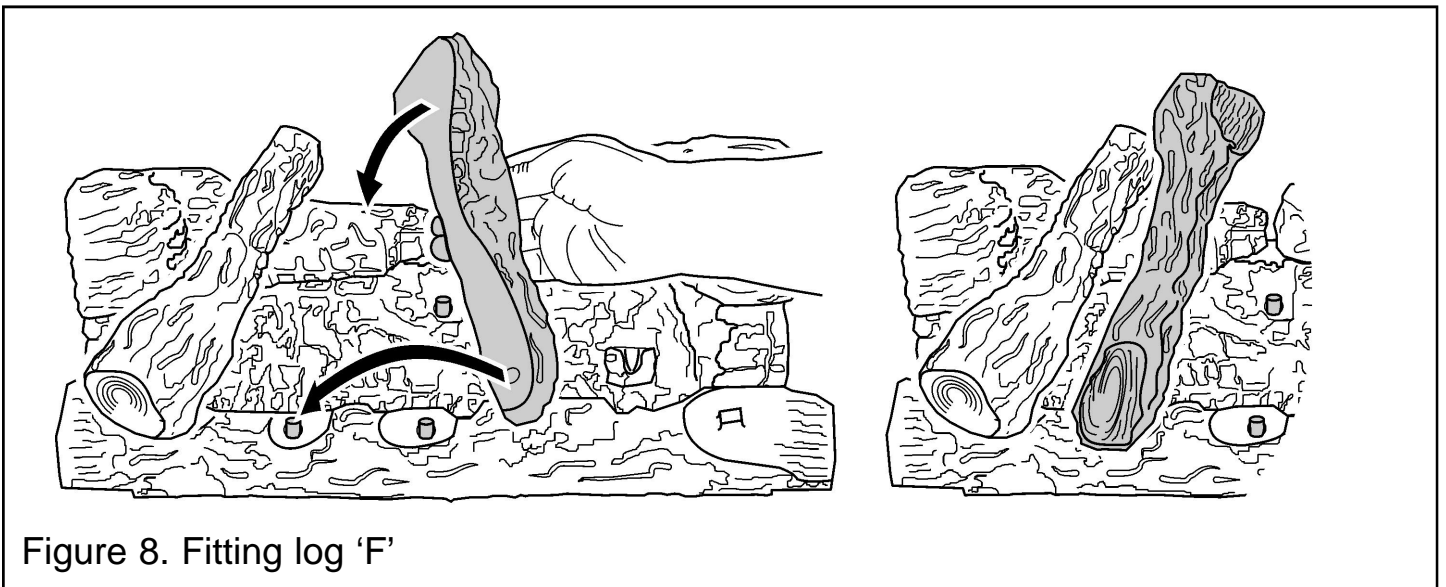


INSTALLER AND OWNER GUIDE

9. Remove log 'G' from its protective packaging and position it as shown in figure 9. Locate the holes in the base of log 'G' onto the pegs on the front and rear base logs.

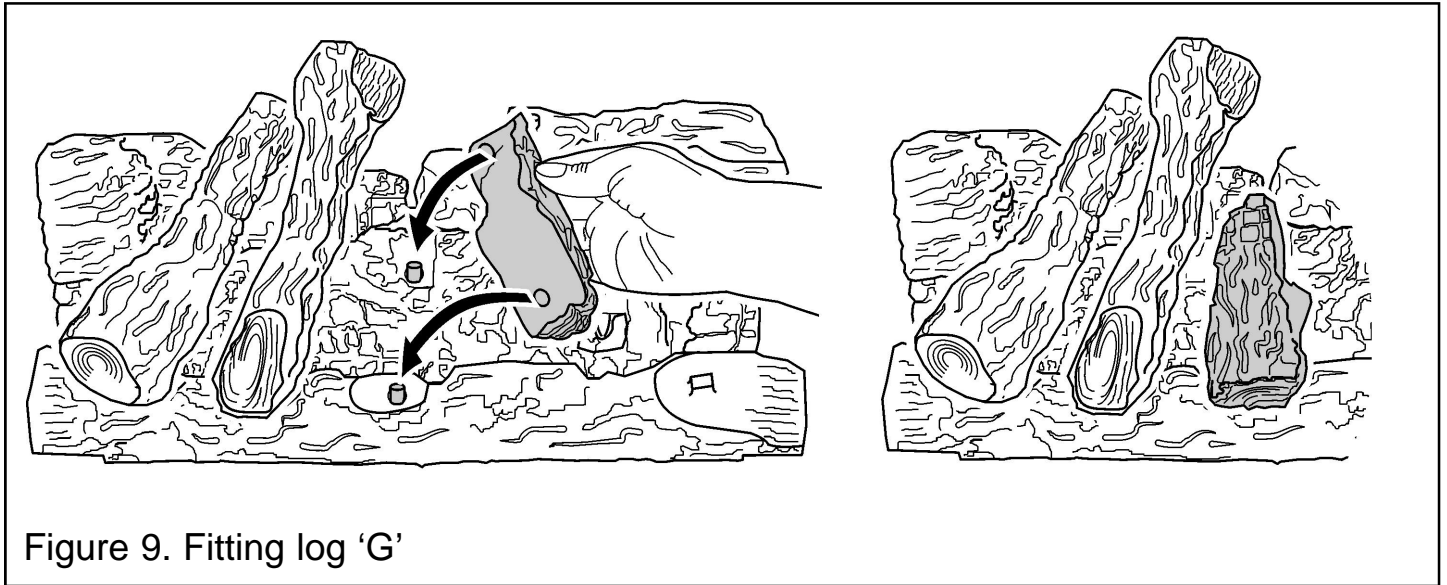


10. Remove log 'H' from its protective packaging and position it as shown in figure 10. Locate the 'side leg' end into the U form on the rear of the rear base ash bed. The front of log 'H' should lie on the smooth area on top of the front base log. Locate the hole in the rear of the log onto the peg at the end of log 'D'. **After fitting ensure that the side leg is in contact with the rear ash bed and has not lifted.**

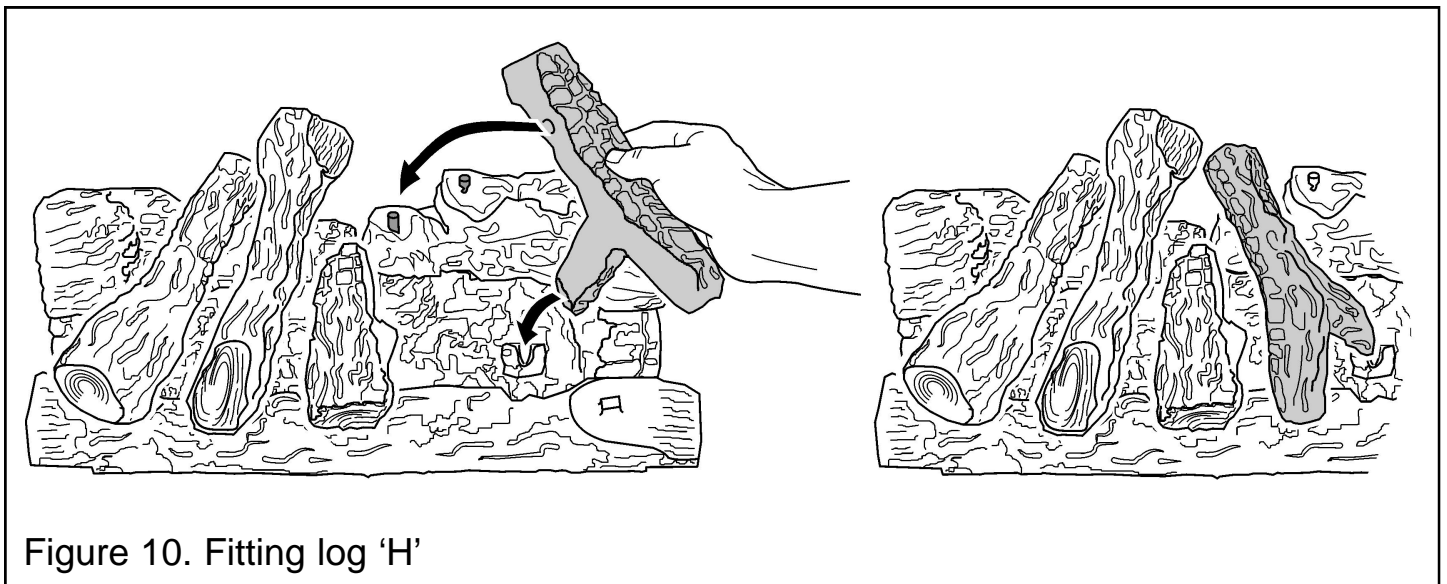

INSTALLER AND OWNER GUIDE

11. Remove log 'I' from its protective packaging and position it as shown in figure 11. Locate the round hole onto the peg on top of log 'D'. Locate the rectangular hole onto the rectangular lug on top of the front log.

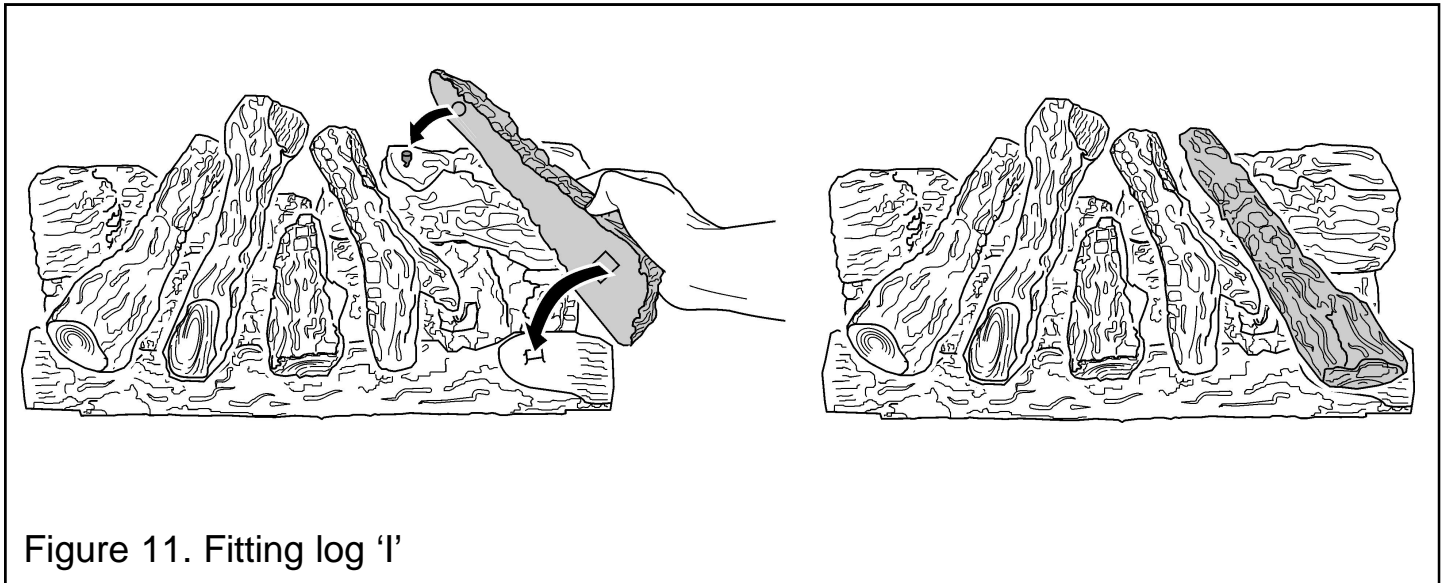

12. Supplied with the ceramic pack is a bag of ash effect ceramic. Place the 'ash' onto the burner tray surface at the sides of the ceramic fuel effect. Ensure that it does not fall onto the burner (See figure 12).

