

CERAMIC PEBBLE FUEL EFFECT INSTALLER AND OWNER GUIDE

**THIS GUIDE IS FOR FITTING THE 11 PEBBLE
CERAMIC FUEL EFFECT TO THE
661, 746, 748, 750 AND BR660VA
MODELS
ONLY**

IMPORTANT

**THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED
TO THE INSTALLER AND OWNER GUIDE SUPPLIED
WITH THE GAS FIRE. IT MUST BE LEFT WITH THE
OWNER.**

**THIS GUIDE MUST BE READ IN CONJUNCTION WITH
THE INSTALLER AND OWNER GUIDE SUPPLIED WITH
THE GAS FIRE.**

INSTALLER AND OWNER GUIDE

SAFETY


This product uses fuel effect pieces and a burner compartment rear wall containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking. This appliance does not contain any component manufactured from asbestos or asbestos related products.

FITTING THE CERAMIC PEBBLE FUEL EFFECT

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

Note: Depending upon model the detail around the ceramic fuel effect may be different to that shown.

1. Place the rear base pebble in the firebox. It should rest on the ledges at the rear sides of the burner unit (See figure 1). When located gently move the rear base pebble so that it is as far forward as possible. The amount of movement will be negligible.

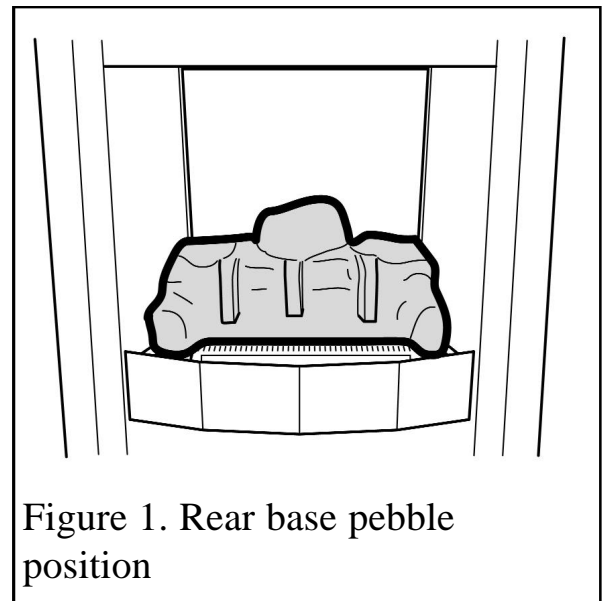

INSTALLER AND OWNER GUIDE

2. Place the front base pebble in the firebox with its bottom front locating over the front rim of the firebox. Gently pull it forward so that it locates immediately behind the front rim of the firebox (See figure 2). The front base pebble will touch the rear base pebble as it is located.

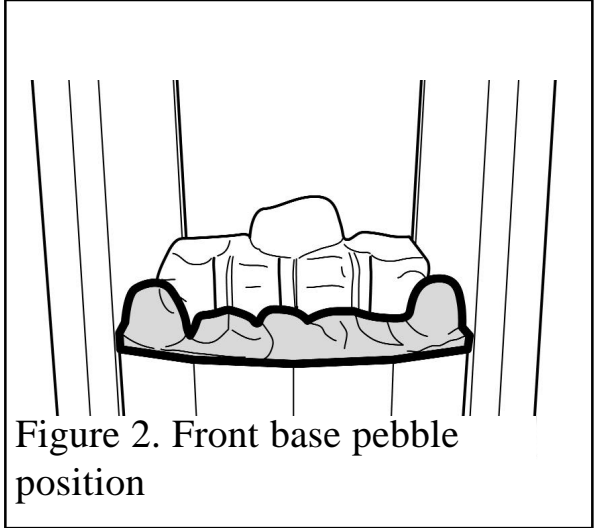


Figure 2. Front base pebble position

Install the 11 loose pebbles as follows. The underside of each pebble is marked with a letter 'A' to 'K' and an arrow.

The pebbles should be positioned so that the arrows always point towards the back of the fireplace opening. When located into position the stem of each arrow should be at 90° to the rear of the fireplace opening (See figure 3).

3. Hold pebble 'A' upright with the arrow pointing to the top. Place pebble "A" on top of the front base pebble. The pebble should rest against the moulded pebble to its left (See figure 3).

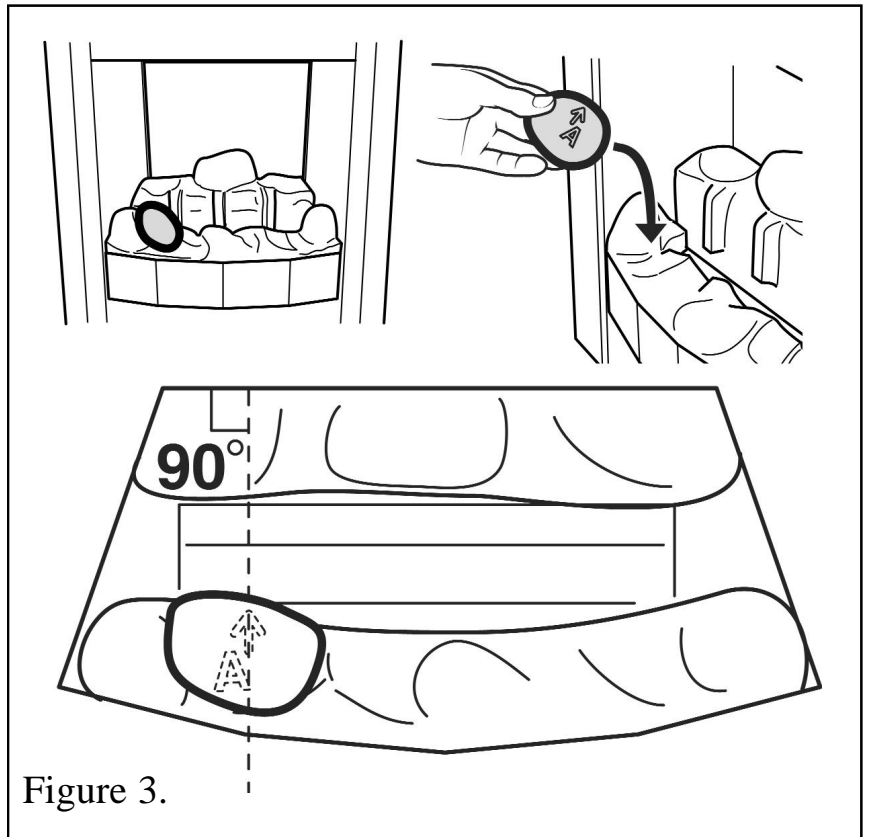


Figure 3.

INSTALLER AND OWNER GUIDE

4. Hold pebble 'B' upright with the arrow pointing to the top. Place pebble "B" on top of the front base pebble (See figure 4).

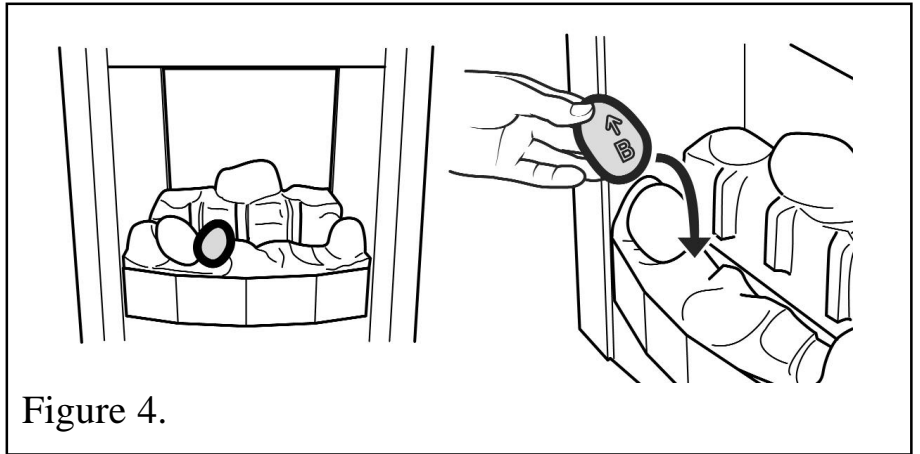


Figure 4.

6. Hold pebble 'C' upright with the arrow pointing to the top. Place pebble "C" on top of the front base pebble. It should lie against the moulded pebble to its left (See figure 5).

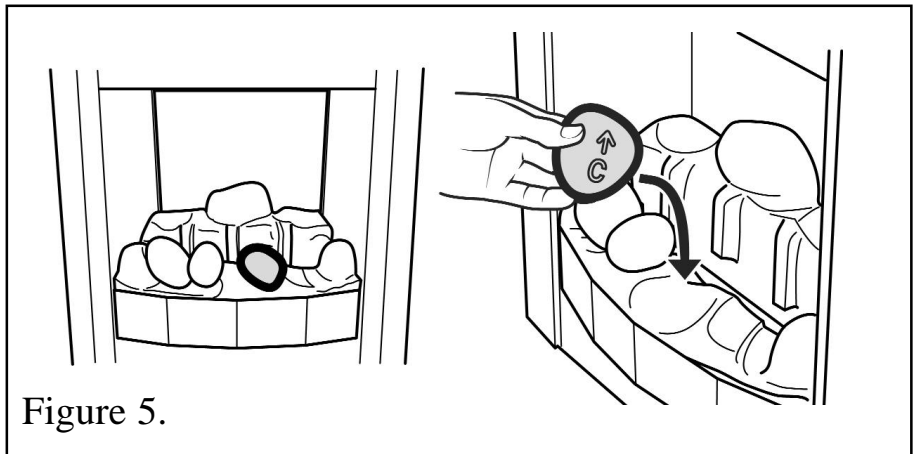


Figure 5.

7. Hold pebble 'D' upright with the arrow pointing to the top. Place pebble "D" on top of the base front pebble. It should rest against the moulded pebble to its right (See figure 6).

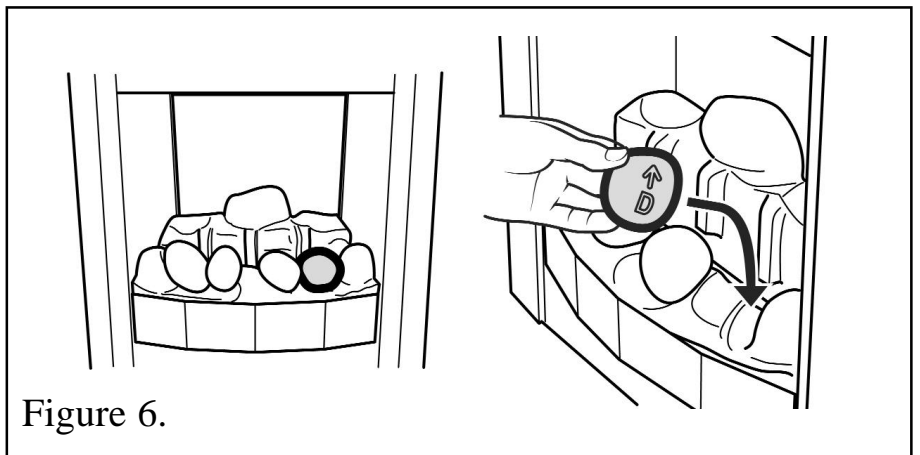


Figure 6.

8. Hold pebble 'E' upright with the arrow pointing to the top. Place pebble 'E' between the front and rear base pebbles. It should rest against the side of the firebox (See figure 7).


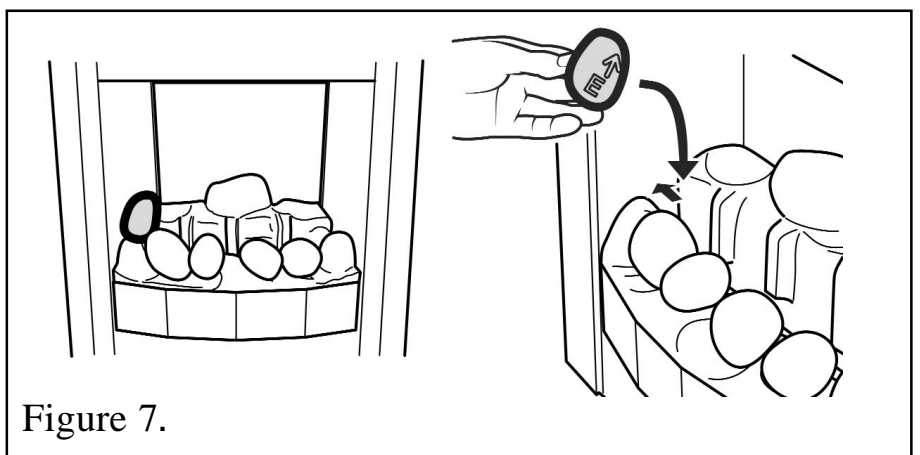



Figure 7.

INSTALLER AND OWNER GUIDE


9. Hold pebble 'F' upright with the arrow pointing to the top. Place pebble 'F' between the front and rear base pebbles. It should rest on top of pebble 'A' & 'B' (See figure 8).

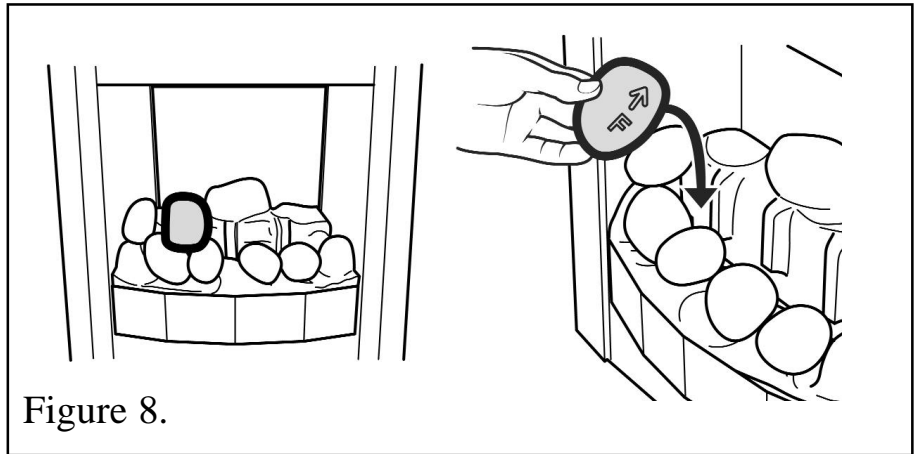


10. Hold pebble 'G' upright with the arrow pointing to the top. Place pebble 'G' between the front and rear base pebbles. It should rest on top of pebble 'B' & 'C' and rest against the moulded pebble in the rear pebble base (See figure 9).

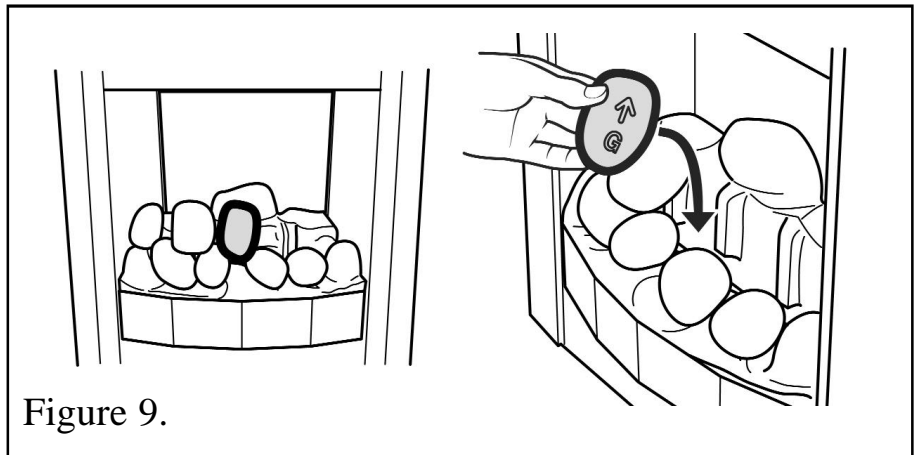

11. Hold pebble 'H' upright with the arrow pointing to the top. Place pebble 'H' between the front and rear base pebbles. It should rest in between pebbles 'C' & 'D' and against the moulded pebble in the rear pebble base (See figure 10).

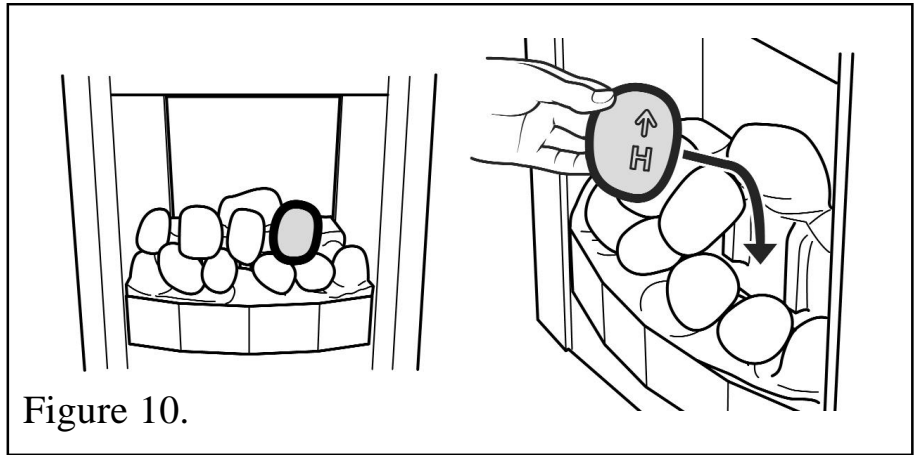

12. Hold pebble 'I' upright with the arrow pointing to the top. Place pebble 'I' between the front and rear base pebbles. It should rest against the side of the firebox (See figure 11).

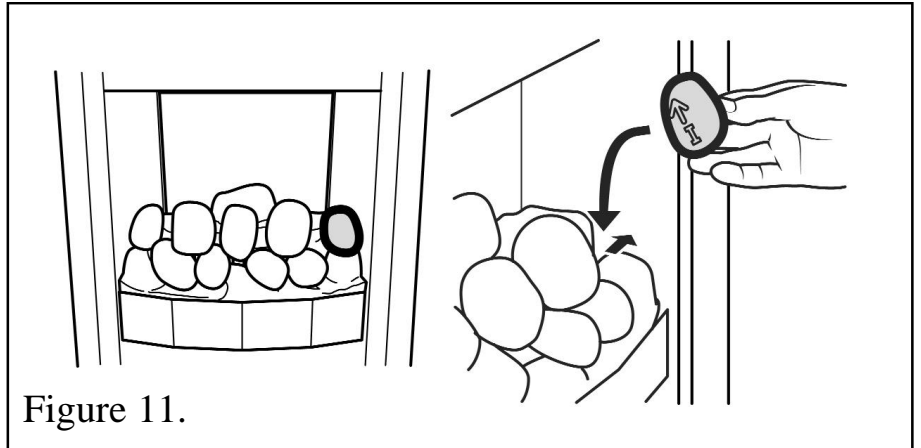

INSTALLER AND OWNER GUIDE

13. Hold pebble 'J' upright with the arrow pointing to the top. Place pebble 'J' on top of the base pebble rear (See figure 12)

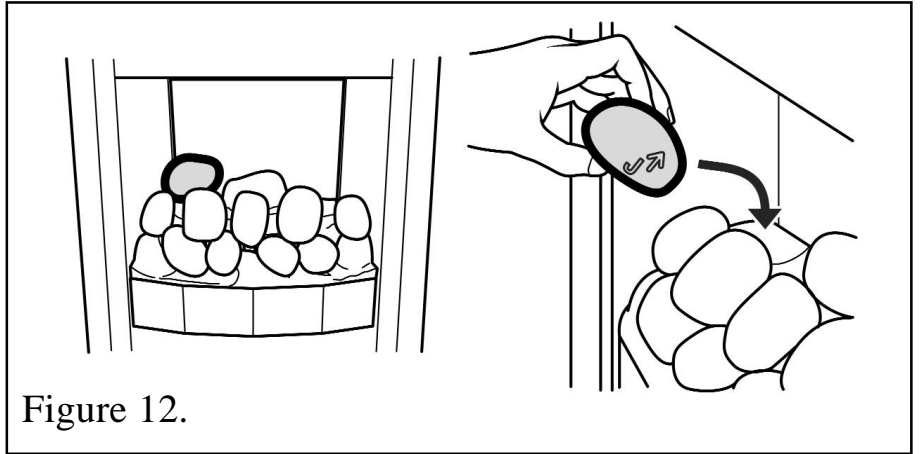


Figure 12.

14. Hold pebble 'K' upright with the arrow pointing to the top. Place pebble 'K' on top of the base pebble rear (See figure 13)

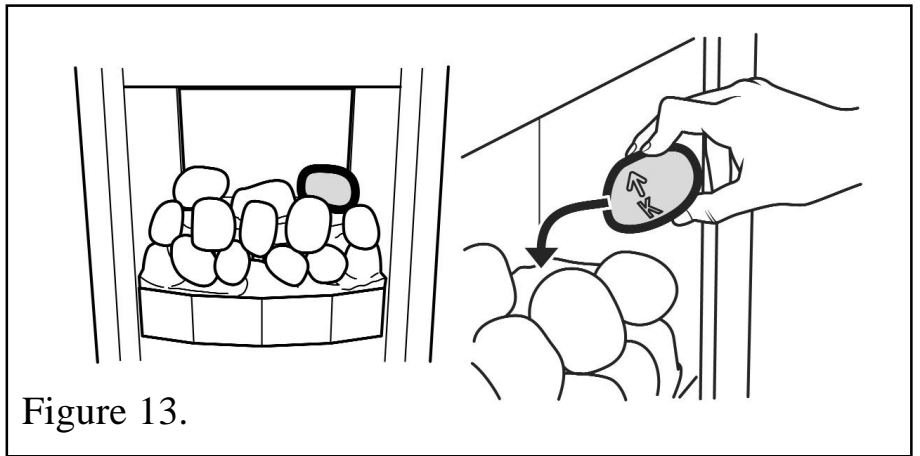


Figure 13.