

# **CERAMIC PEBBLE FUEL EFFECT INSTALLER AND OWNER GUIDE**

**THIS GUIDE IS FOR FITTING THE 16 PEBBLE  
CERAMIC FUEL EFFECT TO THE  
739, 740, 741 AND 751  
MODELS  
ONLY**

## **IMPORTANT**

**THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED  
TO THE INSTALLER AND OWNER GUIDE SUPPLIED  
WITH THE GAS FIRE. IT MUST BE LEFT WITH THE  
OWNER.**

**THIS GUIDE MUST BE READ IN CONJUNCTION WITH  
THE INSTALLER AND OWNER GUIDE SUPPLIED WITH  
THE GAS FIRE.**

# INSTALLER AND OWNER GUIDE

## SAFETY

This product uses fuel effect pieces and burner compartment walls containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.

This appliance does not contain any component manufactured from asbestos or asbestos related products.

## FITTING THE CERAMIC PEBBLE FUEL EFFECT

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

Note: Depending upon model the detail around the ceramic fuel effect may be different to that shown.

1. Place the ceramic pebble base in the burner compartment. The bottom rear face of the pebble base should rest on the angled ledges at the back of the burner compartment. The bottom front recess edge on the pebble base should locate against the tags at the front of the ceramic support (See figure 1).

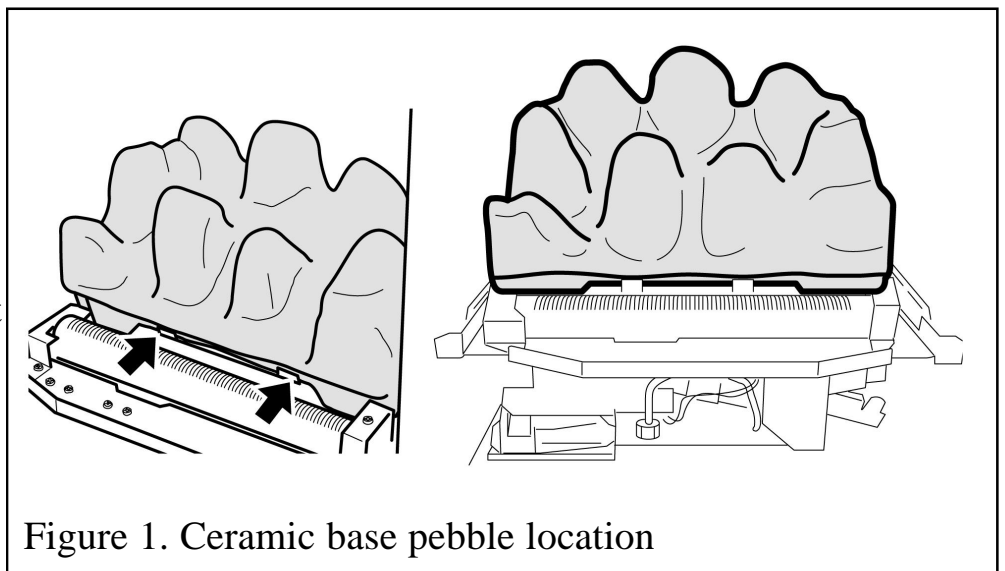


Figure 1. Ceramic base pebble location

# INSTALLER AND OWNER GUIDE

2. Place the right-hand ceramic front pebbles in position in front of the base pebble. The front of the ceramic pebbles should touch the front of the burner module (See figure 2).



3. Place the left hand ceramic front pebbles in position in front of the base pebbles. This should join with the right-hand pebbles. Push the two sides together to minimise the gap. The front of the ceramic pebbles should touch the front of the burner module (See figure 2).

4. There will be a gap between the rear of the front pebbles and the front of the base pebbles (See figure 2).

Install the 16 loose pebbles as follows. The underside of each pebble is marked with a number '1' to '16' and an arrow.

The pebbles should be positioned so that the arrows always point towards the back of the fireplace opening. When located into position the stem of each arrow should be at 90° to the rear of the fireplace opening (See figure 3).

5. Hold pebble '1' upright with the arrow pointing to the top. Locate pebble '1' as shown in figure 3. It should lie on top of the left hand front pebbles allowing a gap to its right. This is to ensure that the pilot flame is visible to the customer.

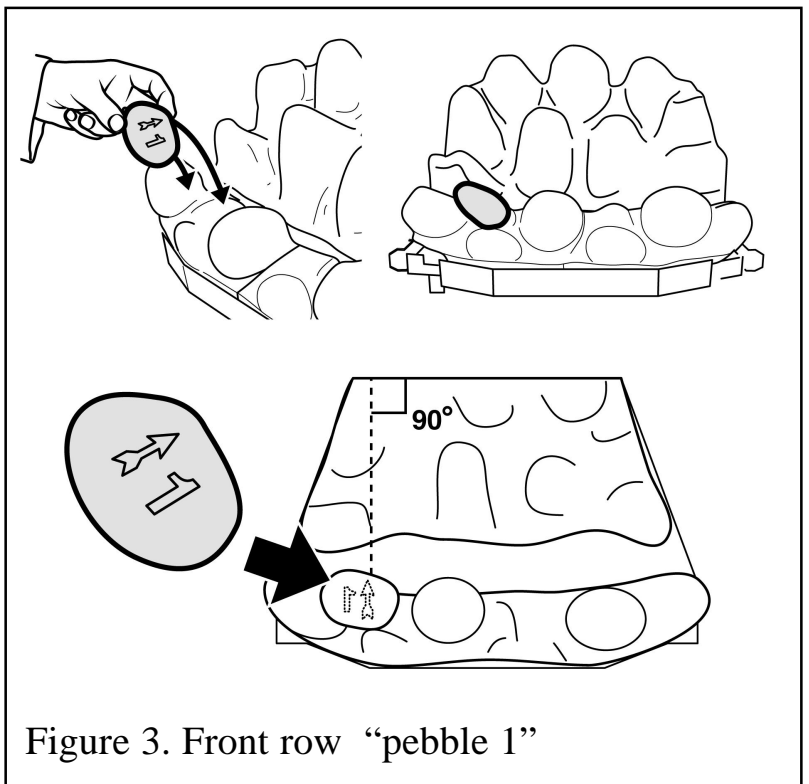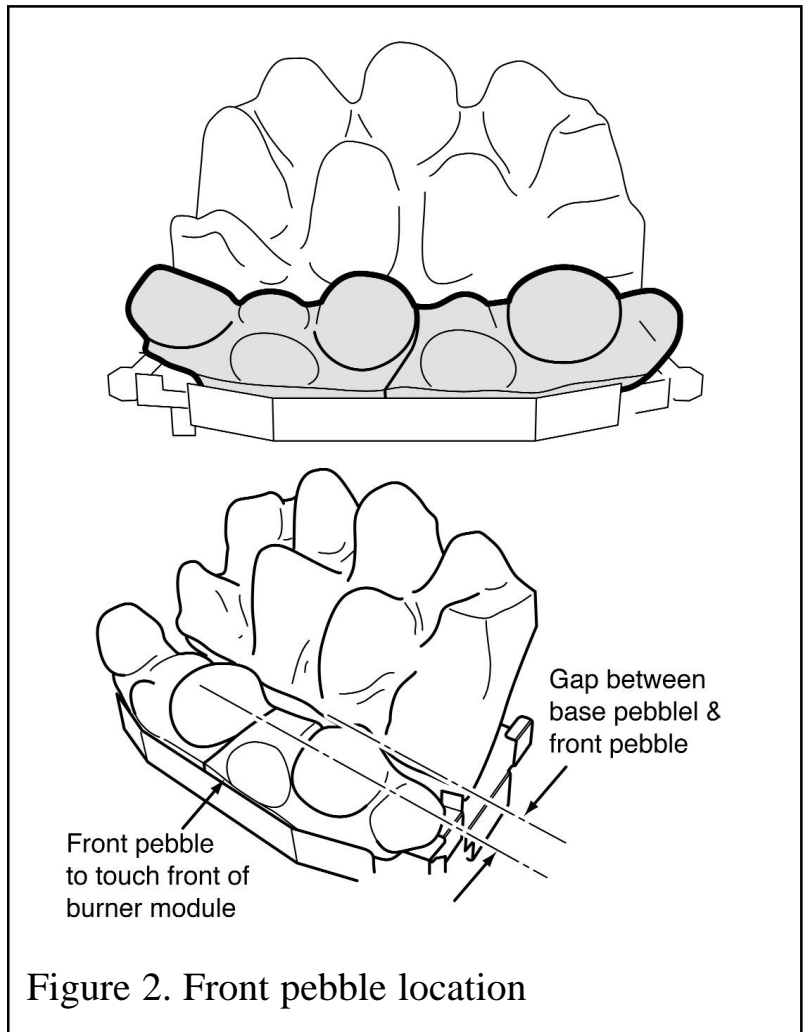

# INSTALLER AND OWNER GUIDE

6. Hold Pebble '2' upright with the arrow pointing to the top. Locate Pebble '2' as shown in figure 56. It should lie on top of the right hand front pebbles.

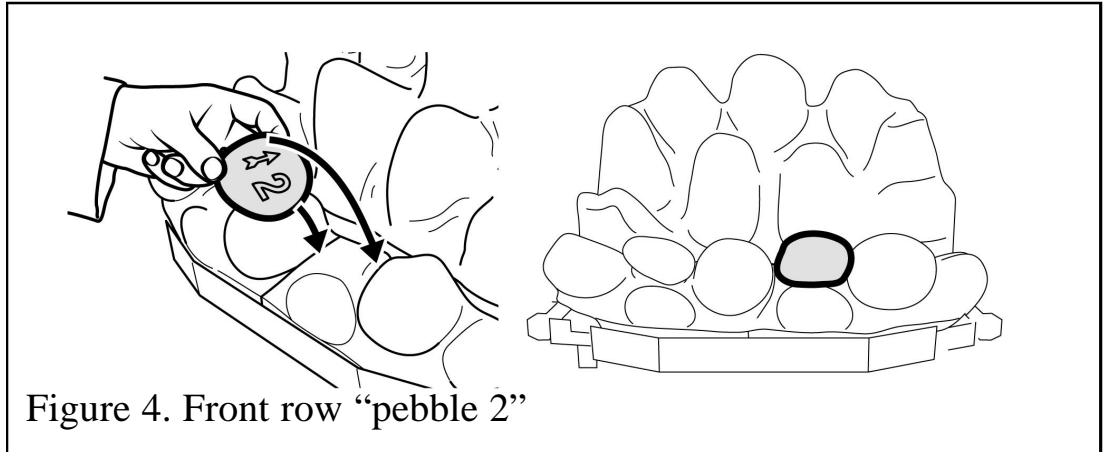


Figure 4. Front row "pebble 2"

This will complete the front row of pebbles.

Locate pebbles '3' to '7' so that they are firmly seated in the valleys in the pebble base and front pebbles.

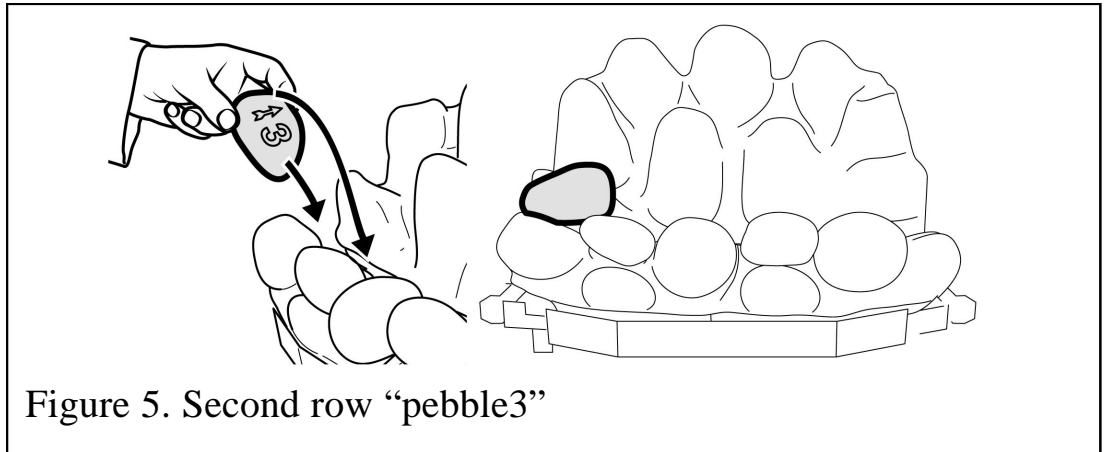


Figure 5. Second row "pebble 3"

7. Hold pebble '3' upright with the arrow pointing to the top. Locate pebble '3' as shown in figure 5.

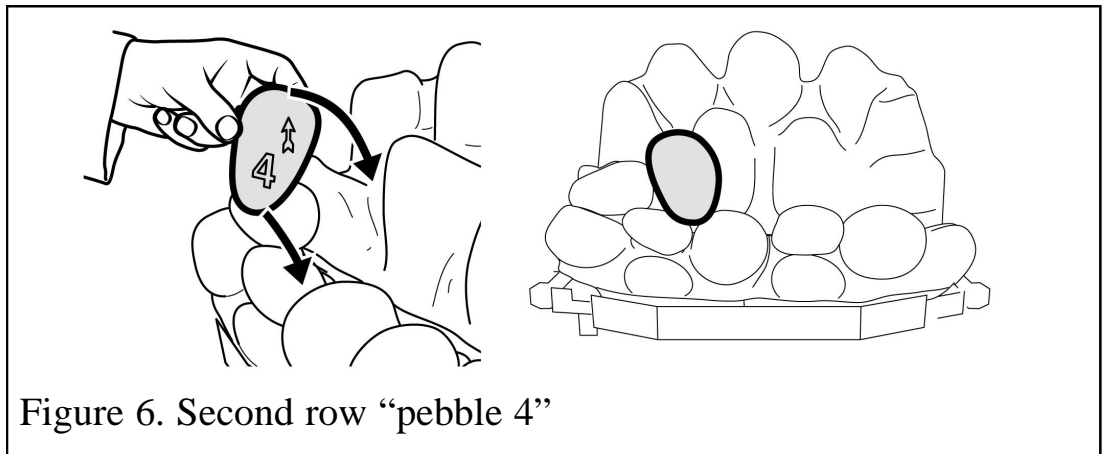


Figure 6. Second row "pebble 4"

8. Hold pebble '4' upright with the arrow pointing to the top. Locate pebble '4' as shown in figure 6.

9. Hold pebble '5' upright with the arrow pointing to the top. Locate pebble '5' as shown in figure 7.

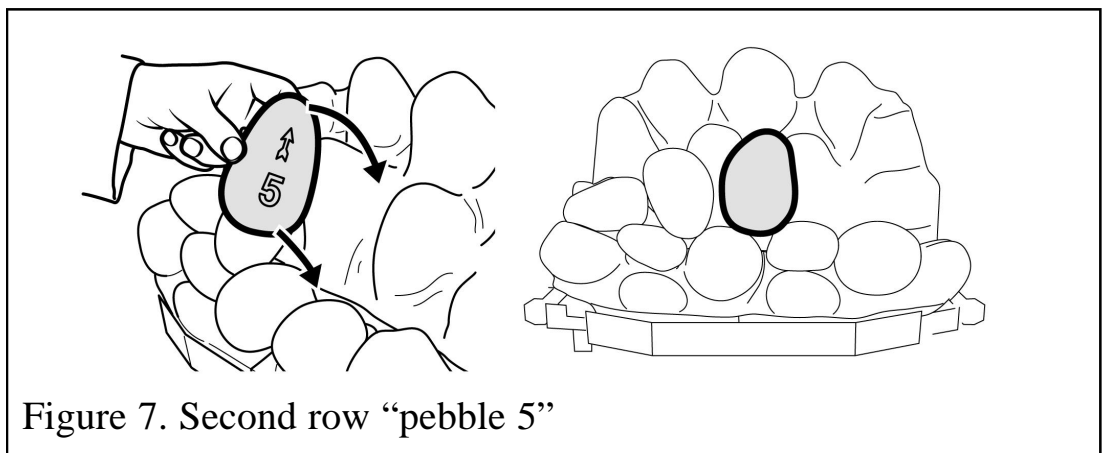


Figure 7. Second row "pebble 5"

# INSTALLER AND OWNER GUIDE

**10.** Hold pebble '6' upright with the arrow pointing to the top. Locate pebble '6' as shown in figure 8.

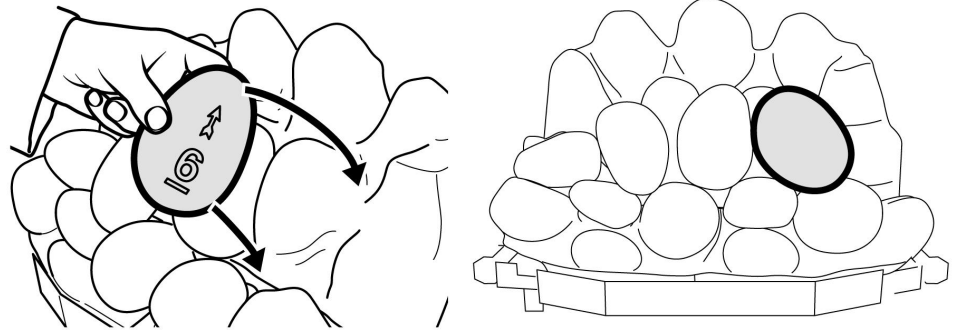


Figure 8. Second row "pebble 6"

**11.** Hold pebble '7' upright with the arrow pointing to the top. Locate pebble '7' as shown in figure 9.

This will complete the second row of loose pebbles.

Locate pebbles '8' to '12' so that they are firmly seated in the valleys in the pebble base.

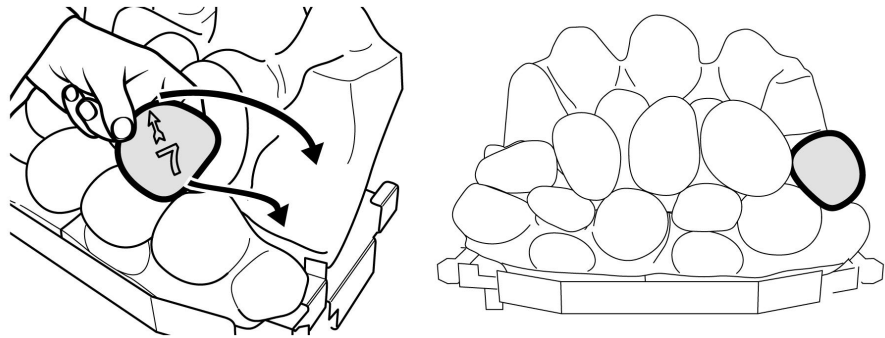


Figure 9. Second row "pebble 7"

**12.** Hold pebble '8' upright with the arrow pointing to the top. Locate pebble '8' as shown in figure 10.

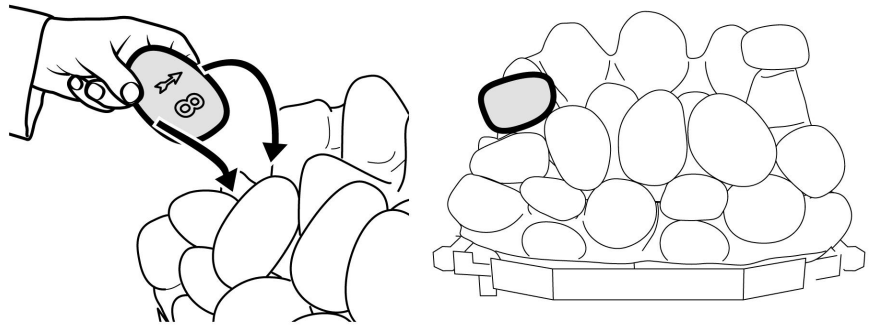


Figure 10. Third row "pebble 8"

**13.** Hold pebble '9' upright with the arrow pointing to the top. Locate pebble '9' as shown in figure 11.

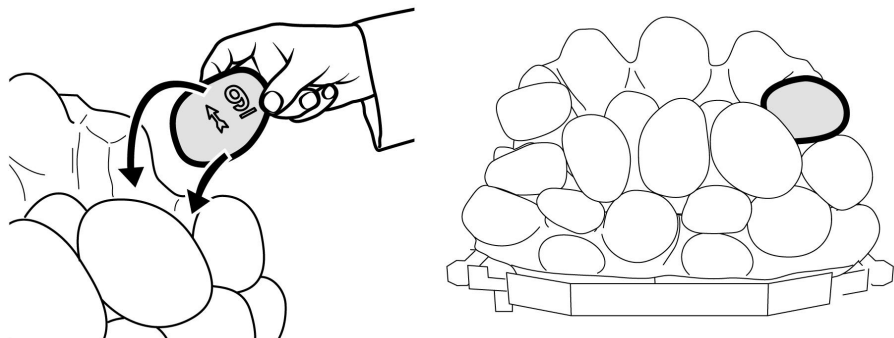


Figure 11. Third row "pebble 9"

# INSTALLER AND OWNER GUIDE

**14.** Hold pebble '10' upright with the arrow pointing to the top. Locate pebble '10' as shown in figure 12.

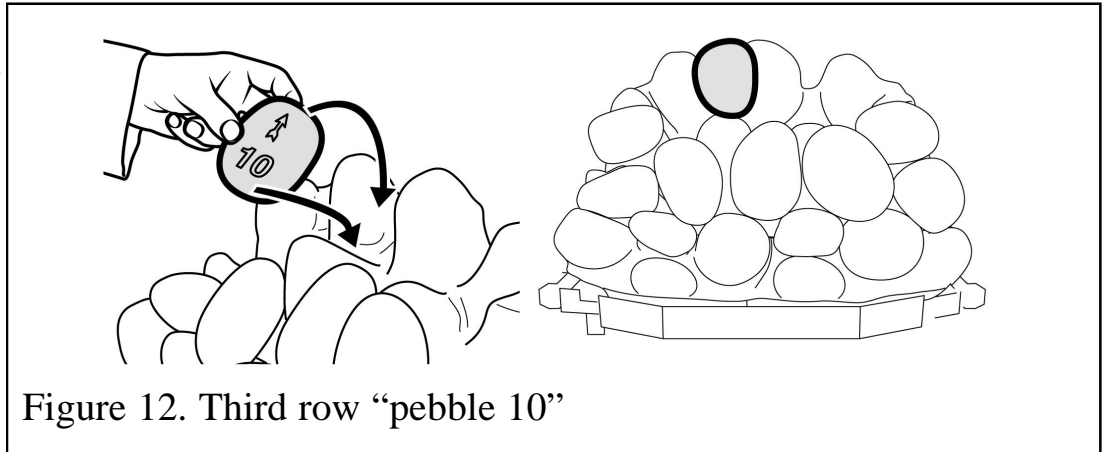


Figure 12. Third row "pebble 10"

**15.** Hold pebble '11' upright with the arrow pointing to the top. Locate pebble '11' as shown in figure 13.

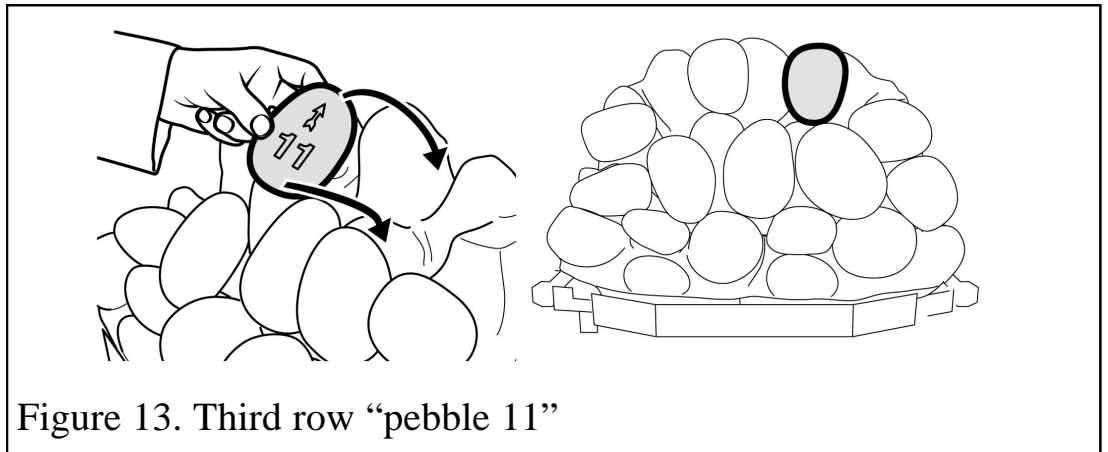


Figure 13. Third row "pebble 11"

**16.** Hold pebble '12' upright with the arrow pointing to the top. Locate pebble '12' as shown in figure 14.

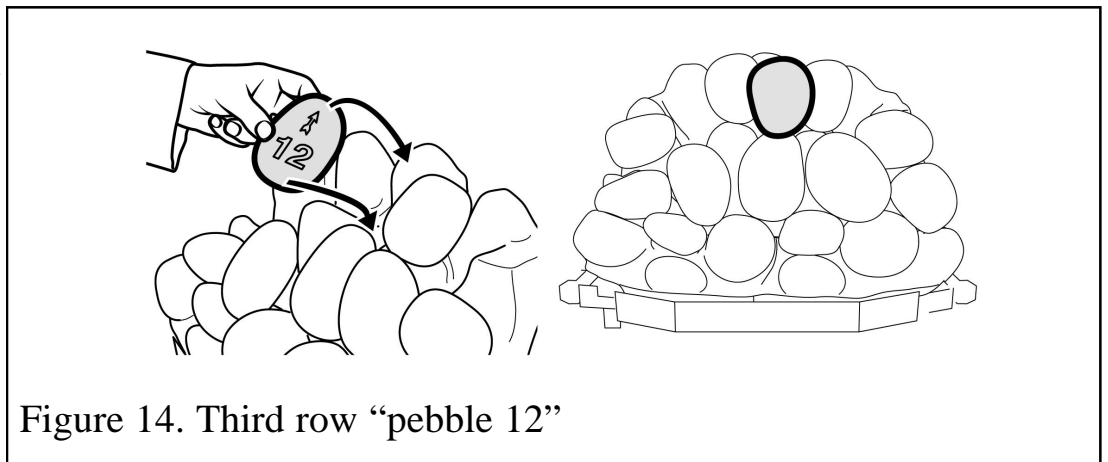


Figure 14. Third row "pebble 12"

**17.** Hold pebble '13' upright with the arrow pointing to the top. Locate pebble '13' as shown in figure 15. Leave a 5mm gap between pebble 13 and the pebble to its right.

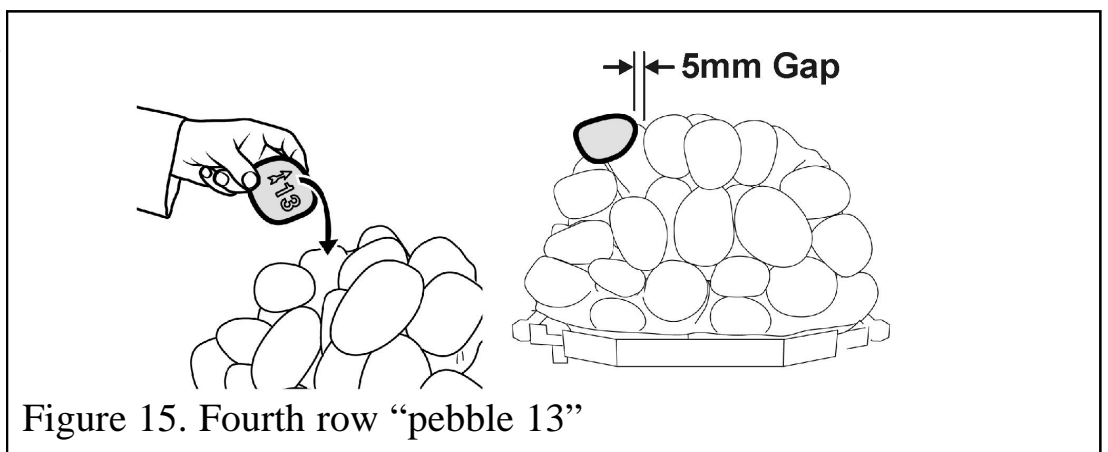


Figure 15. Fourth row "pebble 13"

# INSTALLER AND OWNER GUIDE

**18.** Hold pebble '14' upright with the arrow pointing to the top. Locate pebble '14' as shown in figure 16. Leave a 5mm gap between pebble 14 and the pebble to its left.

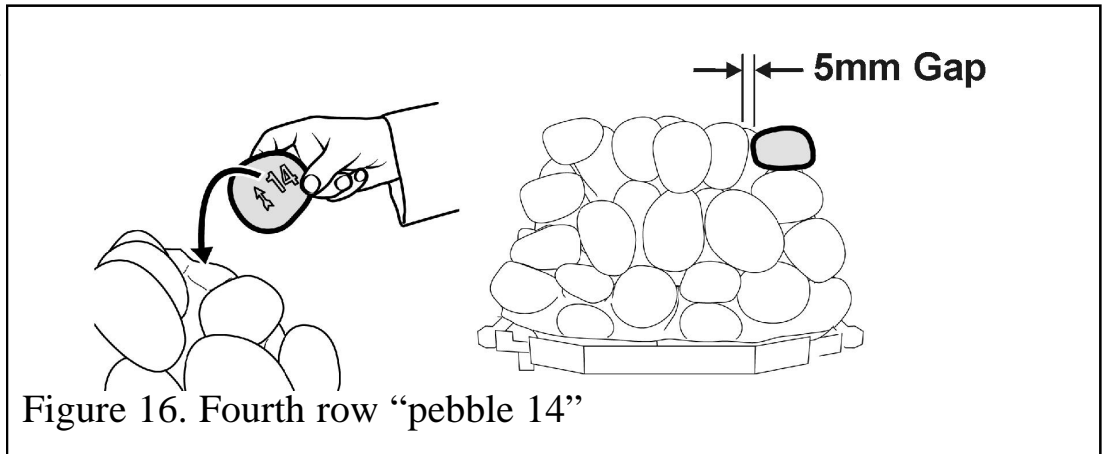


Figure 16. Fourth row "pebble 14"

**19.** Hold pebble '15' upright with the arrow pointing to the top. Locate pebble '15' as shown in figure 17

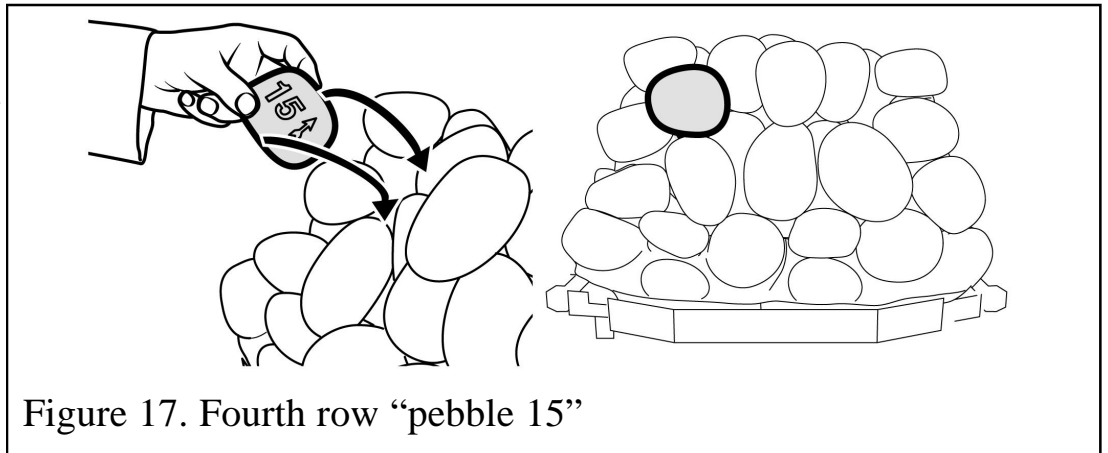


Figure 17. Fourth row "pebble 15"

**20.** Hold pebble '16' upright with the arrow pointing to the top. Locate pebble '16' as shown in figure 18.

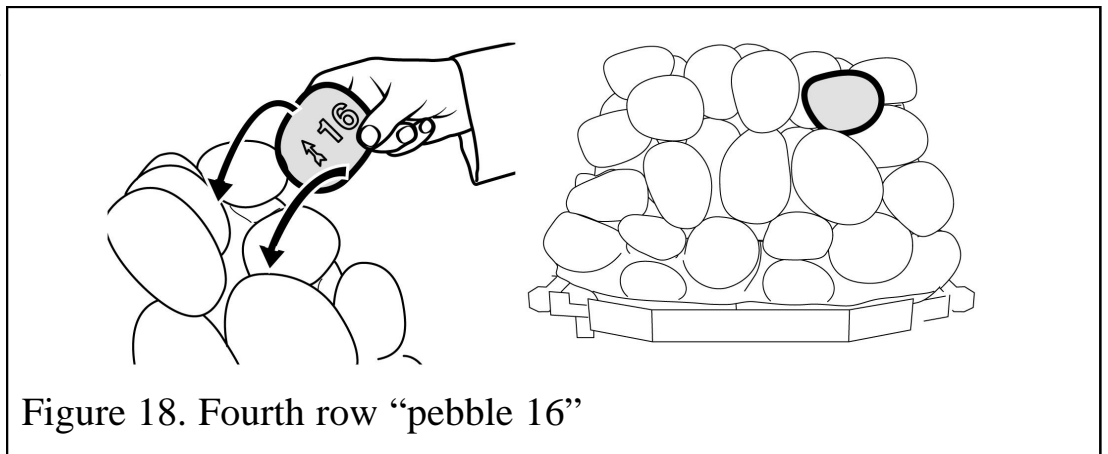


Figure 18. Fourth row "pebble 16"