



Johnson & Starley

Hi-Spec J65

Warm Air Heater

Gas Fired, Open Flue, Downflow Air Heater

Designed for the full heating of larger houses and the replacement or upgrading of earlier systems.

HI-SPEC J65 is a gas fired, open flue, downflow air heater, with a range output of 16.12 - 19.00kW (55,000 - 65,000 Btu/h)

FEATURES

- **Basic Control As Standard**
- **Modairflow Control Optional**
- **Cleanflow Electronic Air Filtration Optional**
- **TTB Flue Spillage Monitoring Device**
Fitted As Standard
- **Summer Air Circulation As Standard**
- **Circulator Water Heater Optional**
(Internally Fitted)

Output: ELJAN 6 = 3.32kW (11,340 Btu/h)




Installation Options: Compartment

**Fully Compliant with
PART L
BUILDING REGULATIONS**

RELIABILITY YOU CAN TRUST


www.johnsonandstarley.co.uk

Features

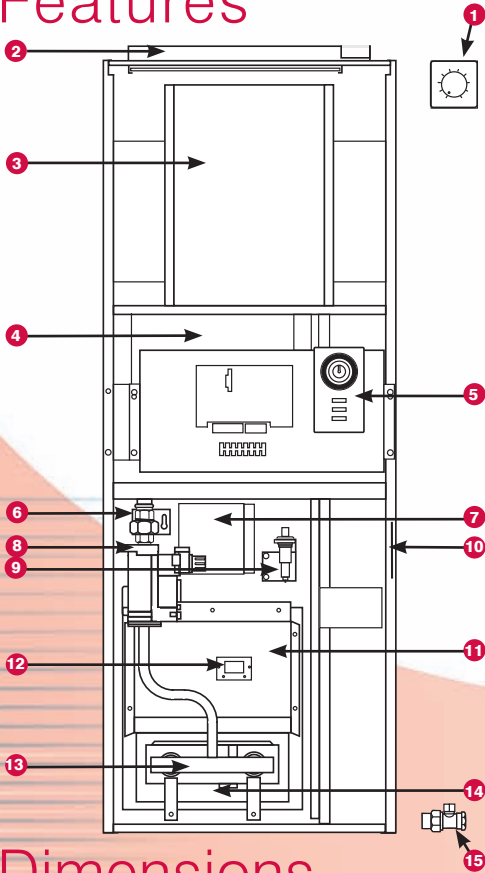


1. Thermosta-Stat (Modairflow Model Only)
2. Air Filter
3. Air Circulating Fan
4. Heat Exchanger Access Cover
5. Time Control Module
6. Gas Supply Pipe
7. Fan Delay/Overheat (Limit) Control
8. Multi-Functional Control
9. Piezo Igniter Unit
10. Data Plate
11. Heat Shield
12. Viewing Port
13. Burner Bar Assembly
14. Pilot Burner
15. Gas Cock (Supplied Loose)

Control Clock

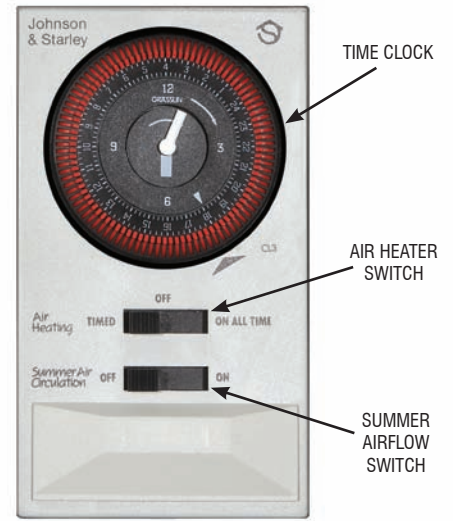


Dimensions

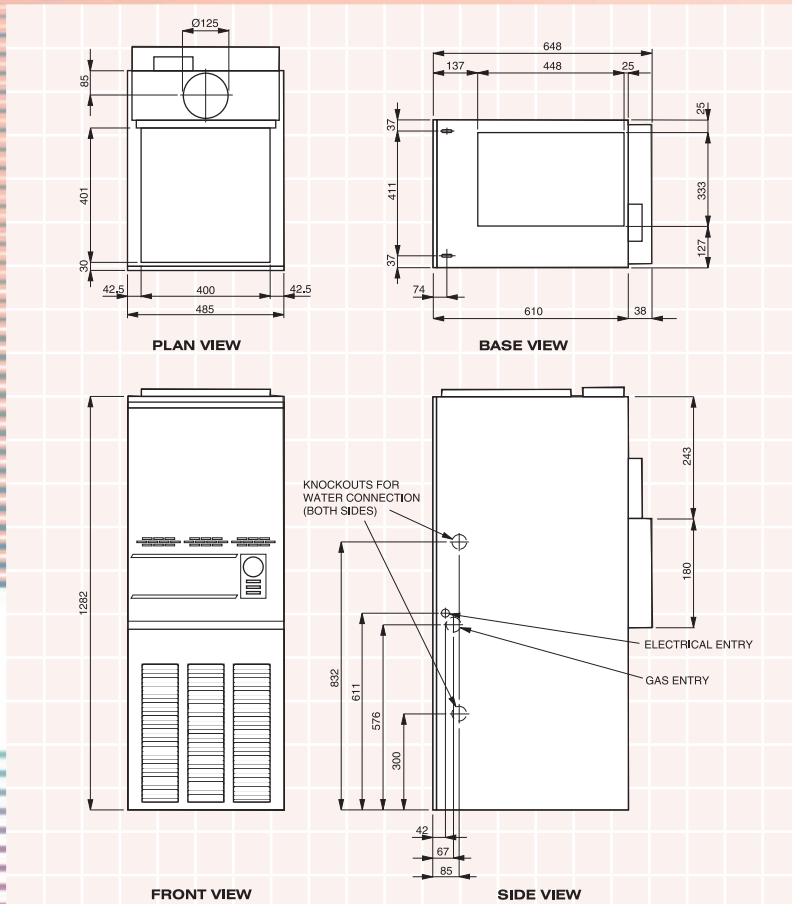

Specifications

HI-SPEC J65				
INPUT	kW	Btu/h	MJ/h	
Low	21.6	73,550	77.6	
High	25.0	85,302	90.0	
OUTPUT	kW	Btu/h	MJ/h	
Low	16.1	55,000	58.0	
High	19.1	65,000	68.6	
WEIGHT	Air Heater		Air Heater & Water Circulator	
	Kgs	lbs	Kgs	lbs
	82.0	180.4	88.0	193.6
Flue Diameter 125mm				
ELJAN 6 WATER CIRCULATOR (if fitted)				
INPUT	kW	Btu/h	MJ/h	
	4.4	15,000	15.83	
OUTPUT	kW	Btu/h	MJ/h	
	3.32	11,340	11.96	

Fan Performance Graph

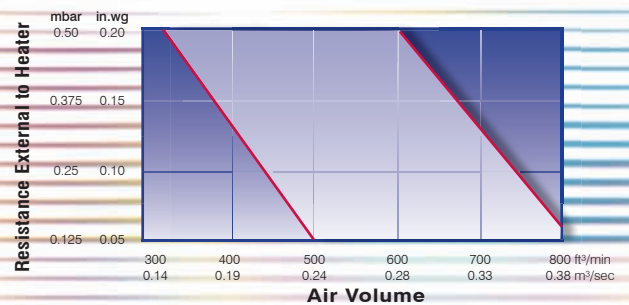

RELIABILITY YOU CAN TRUST

Rhosili Road, Brackmills, Northampton NN4 7LZ Telephone: 01604 762881 Fax: 01604 767408

In the interests of continuous development Johnson & Starley reserve the right to change specification without prior notice.

Publication No. ZZ995-2
August 2009