

Deco Panel Radiators



Strebel Ltd.

1F, Albany Park Industrial Estate
Frimley Road
Camberley
Surrey
GU16 7PB
Tel: +44 (0)1276 685 422
Fax: +44 (0)1276 685 405
www.strebel.co.uk

Strebel DECO Panel radiators offer a designer styled yet simplistic option for any location. With the option of either horizontal or vertical and the regular choices of dimensions and finishes, you can make the appropriate selection to meet your exact specification.

These wall mounted steel panel radiators ensure a solid, yet subtle feature upon your wall, with the output range covering a multitude of locations, any application can be met by the DECO range.

The simple 70mm increments in height from 350mm on the horizontal style offer options for placement. The same applies for the vertical style, which also increases in 70mm increments from an opening width of 350mm, this type tends to compliment a narrow space and becomes more of a feature within its position.


As a standard finish in RAL9010, alternative RAL classic colour finishes are available, so whether it's a feature or functional, the DECO panel radiator becomes a great acquisition for any property.



Model shown
Strebel VL 140/56 980 in RAL 9010



Model shown
Strebel HLLH 70/70 1000 in RAL 9010

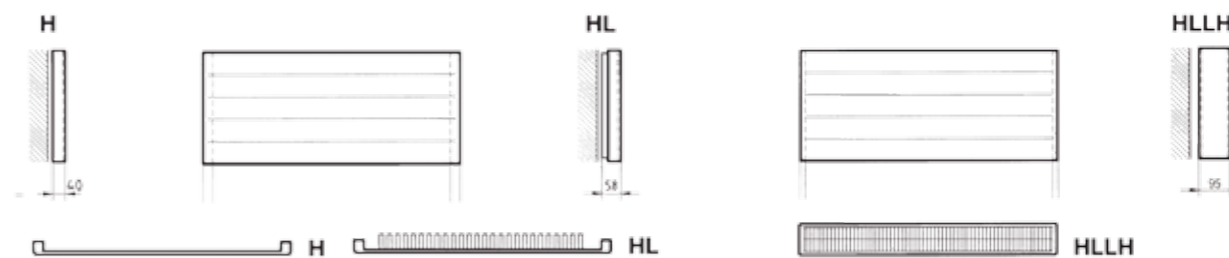

Additional sizes & details available upon request

H Range																					
Code	H35-600	H35-700	H35-800	H35-900	H35-1000	H35-1200	H35-1400	H35-1600	H35-1800	H35-2000	H42-600	H42-700	H42-800	H42-900	H42-1000	H42-1200	H42-1400	H42-1600	H42-1800	H42-2000	
Height	350	350	350	350	350	350	350	350	350	350	420	420	420	420	420	420	420	420	420	420	420
Length	600	700	800	900	1000	1200	1400	1600	1800	2000	600	700	800	900	1000	1200	1400	1600	1800	2000	2000
Output 50°ΔT	235	274	313	352	391	469	547	626	704	782	277	323	369	415	461	553	645	738	830	922	922
Output 60°ΔT	296	345	394	444	493	591	689	789	887	985	349	407	465	523	581	697	813	930	1046	1162	1162

HL Range																					
Code	HL35/35-600	HL35/35-700	HL35/35-800	HL35/35-900	HL35/35-1000	HL35/35-1200	HL35/35-1400	HL35/35-1600	HL35/35-1800	HL35/35-2000	HL42/42-600	HL42/42-700	HL42/42-800	HL42/42-900	HL42/42-1000	HL42/42-1200	HL42/42-1400	HL42/42-1600	HL42/42-1800	HL42/42-2000	
Height	350	350	350	350	350	350	350	350	350	350	420	420	420	420	420	420	420	420	420	420	420
Length	600	700	800	900	1000	1200	1400	1600	1800	2000	600	700	800	900	1000	1200	1400	1600	1800	2000	2000
Output 50°ΔT	473	552	631	710	789	947	1105	1262	1420	1578	521	608	695	782	869	1043	1217	1390	1564	1738	1738
Output 60°ΔT	596	696	795	895	994	1193	1392	1590	1789	1988	656	766	876	985	1095	1314	1533	1751	1971	2190	2190

HLLH Range																					
Code	HLLH35/35-600	HLLH35/35-700	HLLH35/35-800	HLLH35/35-900	HLLH35/35-1000	HLLH35/35-1200	HLLH35/35-1400	HLLH35/35-1600	HLLH35/35-1800	HLLH35/35-2000	HLLH42/42-600	HLLH42/42-700	HLLH42/42-800	HLLH42/42-900	HLLH42/42-1000	HLLH42/42-1200	HLLH42/42-1400	HLLH42/42-1600	HLLH42/42-1800	HLLH42/42-2000	
Height	350	350	350	350	350	350	350	350	350	350	420	420	420	420	420	420	420	420	420	420	420
Length	600	700	800	900	1000	1200	1400	1600	1800	2000	600	700	800	900	1000	1200	1400	1600	1800	2000	2000
Output 50°ΔT	746	870	994	1119	1243	1492	1740	1989	2237	2486	830	968	1106	1245	1383	1660	1936	2213	2489	2766	2766
Output 60°ΔT	940	1096	1252	1410	1566	1880	2192	2506	2819	3132	1046	1220	1394	1569	1743	2092	2439	2788	3136	3485	3485

VL Range																		
Code	VL100/42/42-350	VL100/42/42-420	VL100/42/42-490	VL100/42/42-560	VL100/42/42-630	VL100/42/42-700	VL120/49/49-350	VL120/49/49-420	VL120/49/49-490	VL120/49/49-560	VL120/49/49-630	VL120/49/49-700	VL140/56/56-350	VL140/56/56-420	VL140/56/56-490	VL140/56/56-560	VL140/56/56-630	VL140/56/56-700
Height	1000	1000	1000	1000	1000	1000	1200	1200	1200	1200	1200	1200	1400	1400	1400	1400	1400	1400
Width	350	420	490	560	630	700	350	420	490	560	630	700	350	420	490	560	630	700
Output 50°ΔT	594	713	832	951	1070	1188	674	809	944	1079	1214	1348	747	896	1045	1195	1344	1493
Output 60°ΔT	748	898	1048	1198	1348	1497	849	1019	1189	1360	1530	1698	941	1129	1317	1506	1693	1881