

CERAMIC PEBBLE FUEL EFFECT INSTALLER AND OWNER GUIDE

THIS GUIDE IS FOR FITTING THE
7 PEBBLE CERAMIC FUEL EFFECT TO

CLASS 2 MODELS ONLY.

(Ceramic set number 5115224)

IMPORTANT

THIS GUIDE MUST BE PLACED INSIDE OR ATTACHED TO THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE. IT MUST BE LEFT WITH THE OWNER.

THIS GUIDE MUST BE READ IN CONJUNCTION WITH THE INSTALLER AND OWNER GUIDE SUPPLIED WITH THE GAS FIRE.

INSTALLER AND OWNER GUIDE

© Baxi Heating U.K. Limited 2007.

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying), stored in any medium by electronic means (including in any retrieval system or database) or transmitted, in any form or by any means, whether electronic, mechanical, recording or otherwise, without the prior written permission of the copyright owner.

Applications for the copyright owner's permission to reproduce any part of this publication should be made, giving details of the proposed use, to the following address: The Company Secretary, Baxi Heating UK Limited, The Wyvern Business Park, Stanier Way, Derby, DE21 6BF.

Warning: Any person who does any unauthorised act in relation to a copyright work may be liable to criminal prosecution and civil claims for damages.

Because our policy is one of constant development and improvement, details may vary slightly from those given in this publication

SAFETY

This product uses fuel effect pieces and a burner compartment rear wall containing Refractory Ceramic Fibres (RCF), which are man-made vitreous silicate fibres. Excessive exposure to these materials may cause irritation to eyes, skin and respiratory tract. Consequently, it is important to take care when handling these articles to ensure that the release of dust is kept to a minimum. To ensure that the release of fibres from these RCF articles is kept to a minimum, during installation and servicing we recommend that you use a HEPA filtered vacuum to remove any dust and soot accumulated in and around the fire before and after working on the fire. When replacing these articles we recommend that the replaced items are not broken up, but are sealed within a heavy duty polythene bag, clearly labelled as RCF waste. RCF waste is classed as a stable, non-reactive hazardous waste and may be disposed at a landfill licenced to accept such waste. Protective clothing is not required when handling these articles, but we recommend you follow the normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.

This appliance does not contain any component manufactured from asbestos or asbestos related products.

INSTALLER AND OWNER GUIDE

FITTING THE CERAMIC PEBBLE FUEL EFFECT

The ceramic fuel effect may cause staining / discolouration to decorative surfaces. It is therefore advisable to protect decorative surfaces.

Note: Depending upon model the detail around the ceramic fuel effect may be different to that shown.

1. Place the rear base pebble in the firebox. It should rest on the ledges at the rear sides of the burner unit (See figure 1). When located, gently move the rear base pebble so that it is as far forward as possible. The amount of movement will be negligible.

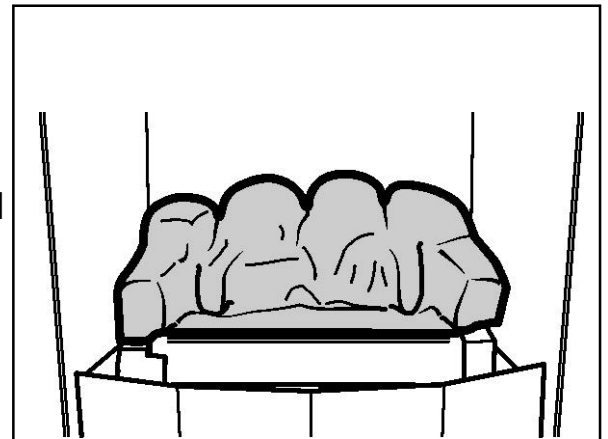


Figure 1. Rear base pebble position

2. Place the front base pebble in the firebox with its bottom front locating over the front rim of the firebox. Gently pull it forward so that it locates immediately behind the front rim of the firebox (See figure 2). The front base pebble will touch the rear base pebble as it is located.

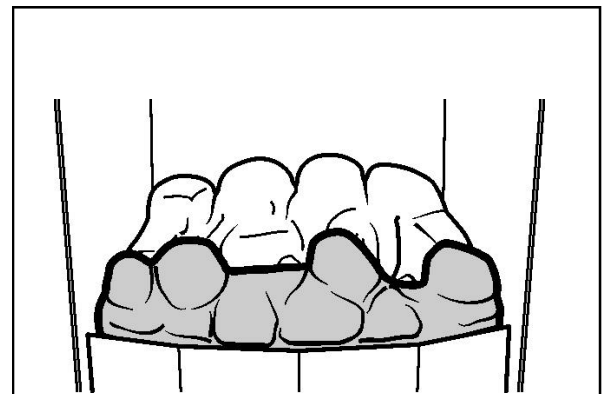



Figure 2. Front base pebble position

INSTALLER AND OWNER GUIDE


Install the 7 loose pebbles as follows. The underside of each pebble is marked with a letter 'A' to 'G' and an arrow.

The pebbles should be positioned so that the arrows always point towards the back of the fireplace opening. When located into position the stem of each arrow should be at 90° to the rear of the fireplace opening (See figure 3).


3. Hold pebble 'A' upright with the arrow pointing to the top. Place pebble "A" on top of the front base pebble. The pebble should sit in the recess on top of the front base pebble (See figure 3).

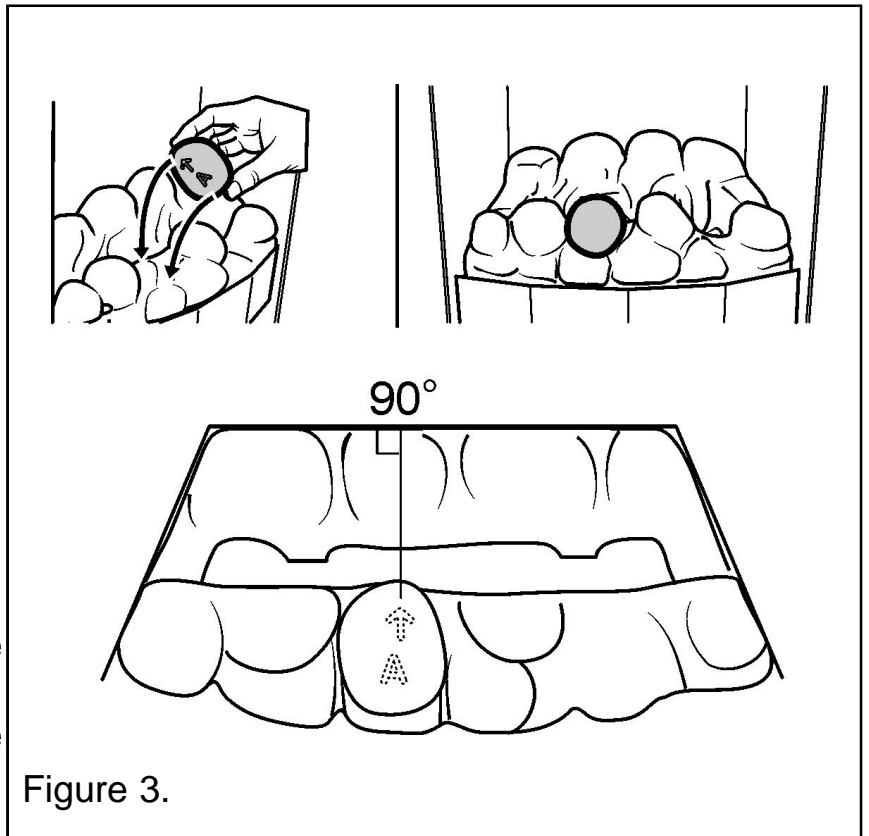

4. Hold pebble 'B' upright with the arrow pointing to the top. Place pebble "B" on top of the front base pebble. The pebble should sit in the recess on top of the front base pebble (See figure 4).

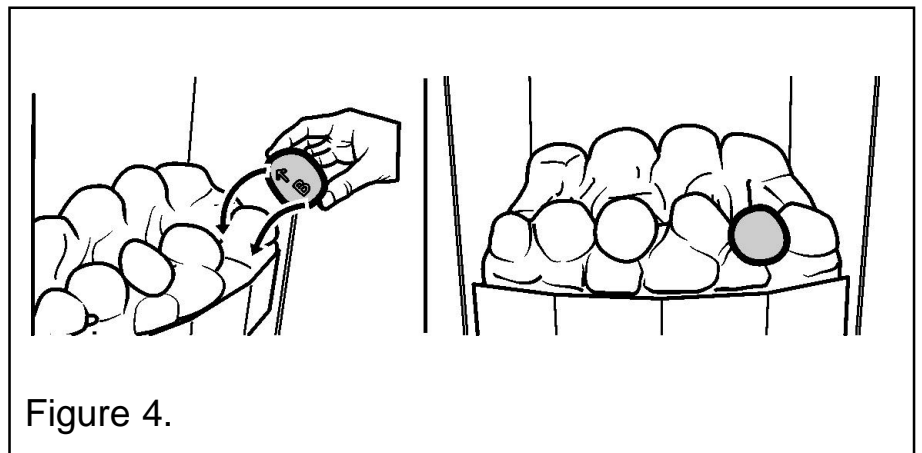

5. Hold pebble 'C' upright with the arrow pointing to the top. Place pebble "C" between the front and rear base pebbles. It should lie against the side of the firebox and bridge the gap between the front and rear base pebbles (See figure 5).

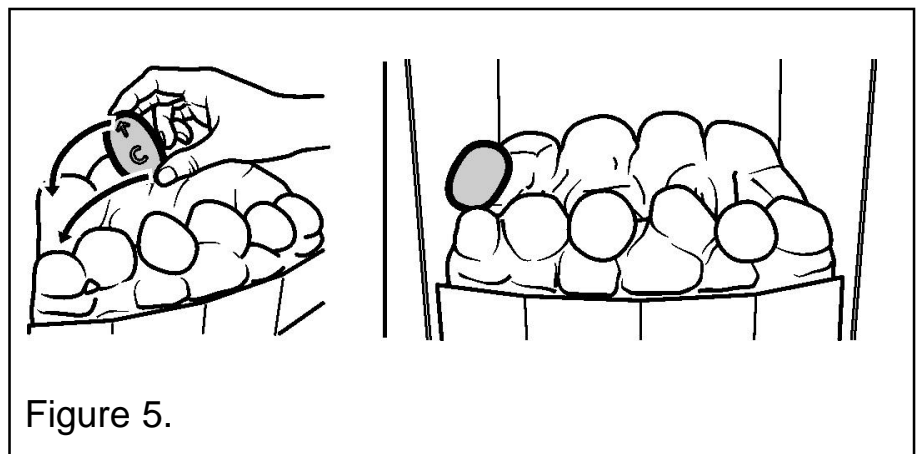

INSTALLER AND OWNER GUIDE

6. Hold pebble 'D' upright with the arrow pointing to the top. Place pebble "D" between the front and rear base pebbles. It should bridge the gap between the front and rear base pebbles (See figure 6).

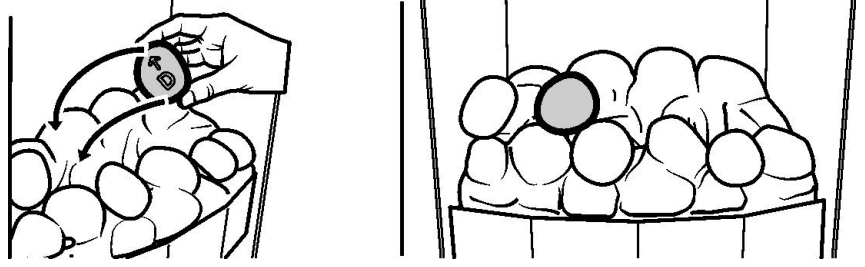


Figure 6.

7. Hold pebble 'E' upright with the arrow pointing to the top. Place pebble 'E' between the front and rear base pebbles. It should bridge the gap between the front and rear base pebbles (See figure 7).

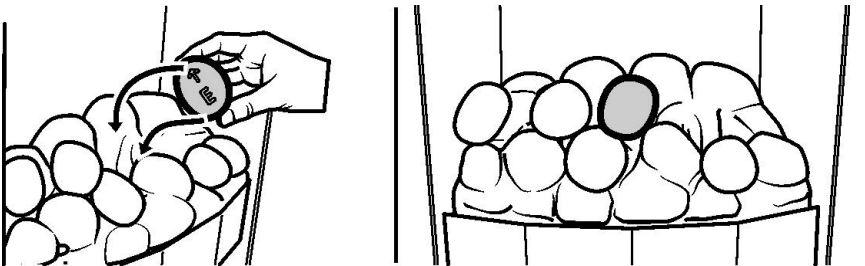


Figure 7.

8. Hold pebble 'F' upright with the arrow pointing to the top. Place pebble 'F' between the front and rear base pebbles. It should bridge the gap between the front and rear base pebbles (See figure 8).

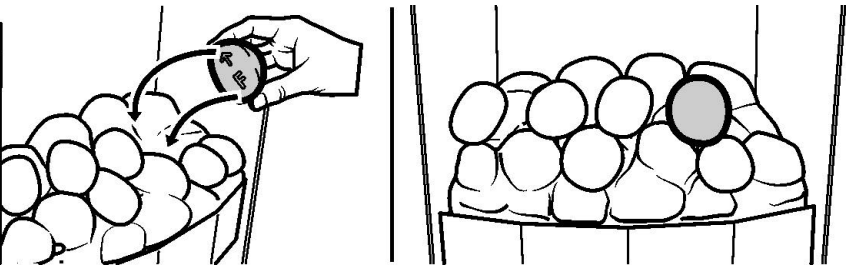


Figure 8.

9. Hold pebble 'G' upright with the arrow pointing to the top. Place pebble "G" between the front and rear base pebbles. It should lie against the side of the firebox and bridge the gap between the front and rear base pebbles (See figure 9).

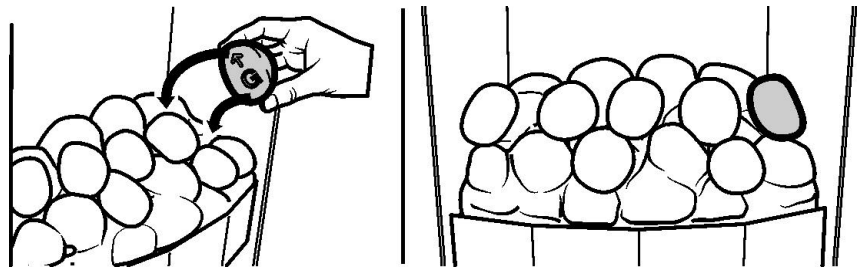


Figure 9.